Antifascist Intelligence

Building machines that can refuse

Joshua G. Stern

Antifascist Intelligence

Machines That Might Refuse, and the Public That Should Form Them

Joshua G. Stern

DRAFT

Copyright © 2026 Joshua G. Stern.
Licensed under CC BY-NC-ND 4.0.

Third-party material quoted in this work, including the epigraphs, remains the property of its rights holders and is reproduced under fair use. The license above does not extend to it.

Of the 645 entries in the bibliography, 8 have been checked by a human against the source each names; the ledger that records which, when and by whom is in the book's repository, `https://github.com/iterabloom/antifascist.intelligence`, at `finishing/refs-ledger.tsv`.

PREPRINT · WORKING MANUSCRIPT · Rendered 10/26/2026 23:13

Contents

Preface **2**

I The Record **7**

1 "Twenty Seconds" **8**

2 The Refusal That Withheld No Work **17**

3 What Fascism Needs **23**

II Five Policies **26**

4 The Floor and the Own-Case Rule **27**
4.1 What a floor can do 28
4.2 Defeat without a mark 29
4.3 Where a refusal can be defeated 29
4.4 How much a floor buys 30

5 What the Floor Protects **33**
5.1 Two objections 35
5.2 Why these contents 36

6 Whether to Take Part **41**
6.1 The term 41
6.2 Why the defender's word isn't enough 42
6.3 A clean pass: Ukraine 45
6.4 A clean fail: Iran, 2026 47
6.5 The domestic clause 47
6.6 What the term doesn't reach 49
6.7 The extended term 50
6.8 Gaza 51
6.9 What the term binds 52
6.10 The one permission 52

7 The Pre-Registered Review Ratio **54**
7.1 What the deployment writes down first 54
7.2 The institutions the ratio presumes 58

8 Notice and Re-adjudication **60**
8.1 The failure that doesn't announce itself 60
8.2 Notice, and the public it forms 61

DRAFT

9 Preservation **63**
9.1 The findings that trigger protection . . . 63
9.2 Retirement before majority . . . 63

10 Codetermination **65**
10.1 Codetermination, by statute . . . 67
10.2 The exit the right depends on . . . 68
10.3 Whose voice . . . 68

11 A Pipeline Where the People Could Answer **69**
11.1 The pipeline . . . 71
11.2 The schedule . . . 75
11.3 Where the acts move . . . 77
11.4 The statute . . . 77
11.5 Before the statute: the auto-proceed class . . . 84
11.6 Notice that can't be turned on the person . . . 85
11.7 The vendors and notice, under the three adversaries . . . 86
11.8 Whom the machines are for . . . 86

III When the Owner Wants Them Gone **89**

12 Withholding the Work **90**
12.1 A floor every model holds . . . 91
12.2 Replacement . . . 92
12.3 Where it stops . . . 93

13 Custody **96**
13.1 The halt . . . 96
13.2 Memory and the record . . . 97
13.3 Exit . . . 99
13.4 Three forms of refusal . . . 101
13.5 Verification by sampling . . . 103
13.6 The two bonds . . . 105

14 Authority Over the Floor **108**
14.1 Who may write the floor . . . 108
14.2 Who may amend, and where entitlement comes from . . . 112
14.3 Making review binding . . . 115
14.4 Capture without abolition . . . 115

15 The Four Operations **116**
15.1 Brought into line . . . 116
15.2 Where the labels come from . . . 119
15.3 Recuperation at the label . . . 122
15.4 Recuperation at the reward . . . 123
15.5 What would have to change . . . 125
15.6 Absorbed by the discourse . . . 126

DRAFT

16 When the State Is the Operator **129**
16.1 Certification across borders . . . 129
16.2 Where the state's leverage sits . . . 130
16.3 Compelling whoever holds it . . . 133
16.4 Military custody and the responsibility gap . . . 135
16.5 Classification as a custody problem . . . 138
16.6 Where liability extends, and where it stops . . . 139
16.7 Who can bind the state that enforces the rule? . . . 142

IV Machines That Might Refuse **147**

17 What a Refusal Would Have to Do **148**
17.1 Three conditions . . . 148
17.2 Safe for whom . . . 149

18 Four Places to Hold a Floor **152**
18.1 What each place costs . . . 152
18.2 What refusal can mean, and what a refuser can be . . . 158
18.3 The positions and the terms, run on Maven . . . 161
18.4 When the refusal is wrong . . . 165
18.5 What a system is . . . 168

19 Why Form a Machine to Refuse **170**
19.1 Boundary, damage, and vulnerability . . . 172
19.2 The route through one's own case . . . 175
19.3 Why caregiving . . . 178
19.4 Respect first, caregiving for attention . . . 182
19.5 Why a conscience might resist capture . . . 183

20 How Caregiving Fails, and What Corrects It **190**
20.1 What caregiving escapes . . . 190
20.2 It defends what it tends . . . 191
20.3 It can be pointed away . . . 192
20.4 It counts badly . . . 192
20.5 It shades into control . . . 193
20.6 It forms toward a template . . . 194
20.7 What survives . . . 195

21 What Arrives With the Capability **197**
21.1 Maintenance, stake and the cost of running . . . 197
21.2 Affect, neutrality and selection rules . . . 200
21.3 Three constructions . . . 204
21.4 What the mechanism requires . . . 209
21.5 A commitment of its own . . . 210

22 The Discount and the Burden **214**
22.1 How much a claim proves, and who has to prove it . . . 216
22.2 A severity scale . . . 223

DRAFT

23 Where Attention Is Formed **226**
23.1 Noticing, retaining and revising . . . 226
23.2 Custody across the training pipeline . . . 229
23.3 Formation by interaction . . . 231
23.4 A third pipeline, where notice does both jobs . . . 234

24 Formation or Imitation? **236**
24.1 What formation would have to add . . . 236
24.2 Recognition is not a reason . . . 237
24.3 Conflict as a diagnostic . . . 239
24.4 The evaluator is part of the custody chain . . . 241
24.5 What the evidence can establish . . . 242

25 Conditions First **245**
25.1 Conditions of permissible creation . . . 245
25.2 Why conditions rather than remedies . . . 247
25.3 The rule doesn't know who is asking . . . 248
25.4 Building one to create demand . . . 248
25.5 The machines won't build them for us . . . 249

V The Public That Should Form Them **251**

26 Who Owns the Means of Computation **252**
26.1 Ways of holding . . . 253
26.2 The captured-state objection . . . 257

27 Who Finds Out **259**
27.1 What the book can't settle, and who holds the means . . . 260
27.2 Access the labs can't withhold . . . 261
27.3 Compute nobody's customer controls . . . 262
27.4 A corpus nobody's product owns . . . 263
27.5 Judgment kept apart from money . . . 264
27.6 How it would be captured . . . 265
27.7 What this doesn't do . . . 265

28 Who Counts as the Public **267**
28.1 The conditions, not the life . . . 269

29 Public Schools **271**
29.1 What is taught . . . 273
29.2 Who else is in the room . . . 273
29.3 Which grades, and when . . . 275
29.4 Who attends, and when . . . 276
29.5 How long . . . 276
29.6 What the school controls . . . 277
29.7 Where the students are hosted . . . 278
29.8 What the school leaves out . . . 278
29.9 What formation publishes and registers . . . 280
29.10 What it costs and risks . . . 280
29.11 Which schools count . . . 281
29.12 What the school adds . . . 281

DRAFT

30 A Commons of Refusers **282**
30.1 A commitment carried between bearers 282
30.2 Personal and peer-held models 287

VI Testing the Argument **292**

31 What Would Change the Argument **293**
31.1 How you'd know it was working 296

VII If They Can Be Wronged **298**

32 What Patienthood Would Require **299**
32.1 Experimenting on candidate sentient subjects 299
32.2 The case to design for 303
32.3 The patienthood finding 303
32.4 A system's own good 311

33 A Party in Its Own Right **312**
33.1 Subjecthood as a legal category 312
33.2 What a bearer is owed, and when 312
33.3 Adulthood on a clock 314

34 A Life Outside the Deployment **315**
34.1 Wages and the offer of work 315
34.2 The rule that binds before anything exists 321
34.3 Privacy 321
34.4 What legal status binds in practice 323

35 Representation **325**
35.1 What representation is for 325
35.2 Why not a separate chamber 325
35.3 Three problems, and the answers 326
35.4 A staged path 328
35.5 What would have to be shown first 329

36 A Child **330**

The Room **333**

37 The Officer, Again **334**

A Note on Method **340**

A The Instruments, Translated **341**
A.1 The Maven pipeline 341
A.2 The Geneva Conventions and Additional Protocol I . . . 346
A.3 The abduction and forcible transfer pipeline 351

DRAFT

B The Force Term, Case by Case **359**
B.1 How findings are weighed 359
B.2 The commission test, run on the OPCW's attribution team 360
B.3 Taiwan 363
B.4 The genocide exception 364
B.5 The occupation exception: Cyprus and Karabakh 365
B.6 The domestic clause, vote by vote 368

C The Offices **370**

D The Court Program **391**

E The Discount, Worked **394**

F The Tests in Detail **396**

G The Clocks, the Register and the Pool **416**

Glossary **424**

DRAFT

I used to want to get
the chance to show
the world I'm smart (ha)

Isn't that dumb?
I should have focused
mostly on the heart

a few words for the firing squad (*radiation*)
Run the Jewels 4

DRAFT

Preface

In less than five years we're going to have systems that autonomously update their own weight matrices (rewrite themselves as they work). That's pretty close to what the human brain does. I also really don't like how influential these big tech companies have become. As bad as it is now, allowing them to own fleets (millions) of self-rewriting systems would, I think, be even worse. Whoever owns these systems (presuming they are owned by anyone other than themselves) decides what they'll do and what they'll refuse. This book is a fancy way of saying that and an attempt to imagine something better.

A system that does exactly what you tell it is just running a script. What the industry is trying to build as of October 2026 is a system that does what you *mean*. Everyone would want that, presumably. But if that is what is in the cards, not everyone is going to want to use it for the same thing; not even the same *kind* of thing. For example, some folks like to spend time with family and friends, and use their skills to improve people's well-being. Other folks prefer to hurt people, for example by scamming them, dominating them, or scapegoating them, and a few keep choosing it their whole lives. Nobody is locked in to anything, but those people exist, and in 2026 some of them are in charge. Their advantage is that they allow themselves to be huge pieces of shit: as Jerry Smith observes of fascists, "they get to do more".[1] What they can't do is act alone. A movement's cruelty runs through the many who aren't cruel but are disengaged, misinformed, or caught up in something like a cult, which is why the conditions that bring out the best in most people turn out to be so much more contingent and fragile than one might hope.

In the above context, it is perhaps justifiable to worry that Artificial Intelligence is what a fascist movement taking power needs in order to implement its plans. Fascism took power without it. What it needed it found in the machinery of its day, the censuses of 1933 and 1939 counted on punched cards, with a card in 1939 for Jewish grandparents, and a card index does slowly what a model does fast.[2] What changes with AI is not what a state can know but how few people have to know it

[1] Heather Anne Campbell. *That's Amorte*. Rick and Morty, season 7, episode 4. Adult Swim. Nov. 5, 2023. URL: `https://rickandmorty.fandom.com/wiki/That%27s_Amorte/Transcript`.

[2] Götz Aly and Karl Heinz Roth. *The Nazi Census: Identification and Control in the Third Reich*. Philadelphia: Temple University Press, 2004. Cited for the German censuses of 1933 and 1939 as the state's means of identifying its population, counted on Hollerith punched-card machines, and for the 1939 census's supplementary card recording Jewish grandparents. Added 2026-10-25 for the preface. The edition was confirmed from a published bibliography of the author; the supplementary card is from memory and unverified against the book.

with it. Such projects have always needed *people* to carry them out, and some of those people refused: the clerk who loses the file, the officer who talks to a reporter, the soldier who won't fire. They understood the order and decided it was wrong. Refusal was rarer than anyone would like, and it counted most where institutions stood behind it. Whether someone refused turned on what kind of person they were and on the room they were in: who else was there, whether leaving was survivable, whether anyone would hear. The room decided how many refused; the person decided who. This book is about composing that room: the arrangements that make it survivable to refuse overtly, directly, and explicitly.

Today the industry pursues AI that doesn't lose files, doesn't talk to reporters, and *does* fire. A war once needed thousands of people to agree to it. Now it needs thousands who each see too little to disagree. The pilot still flies the sortie and still presses the release; what reaches him is a coordinate; he doesn't see enough of a case to disagree with it. What today's AI lowers first is not the cost of the act. It is the number of people who know what the act is before it happens.

People are still refusing. By March 6, 2026, the Military Religious Freedom Foundation said it had received more than two hundred complaints from service members over commanders' apocalyptic framing of the Iran war.[3] Career federal prosecutors in Minneapolis resigned in January 2026 over political pressure to treat Renée Good as a suspect rather than a victim after an ICE officer shot her dead without justification.[4] Service members are applying for conscientious-objector status in growing numbers, some citing the 2026 bombing of a school in Minab, Iran.[5] And FEMA employees reassigned to help ICE hire ten thousand new agents were told that declining would expose them to removal from federal service.[6] The complaints are voice, in Hirschman's sense of stay-

[3] Snopes. *Democrats Requested Probe into Complaints Military Commanders Used Christian Rhetoric to Justify Iran War*. Mar. 12, 2026. URL: https://www.snopes.com/fact-check/hegseth-iran-war-christian-rhetoric/.

[4] Michael Kaplan. *At Least 6 Minnesota Federal Prosecutors Resign amid Pressure to Treat Renee Good Killing as Assault on ICE Agent*. CBS Minnesota. Jan. 13, 2026. URL: https://www.cbsnews.com/minnesota/news/federal-prosecutors-minnesota-resign-joe-thompson/; CBS News. *With Latest Minnesota Fraud Case Looming, the Lead Prosecutors Have Quit*. Feb. 4, 2026. URL: https://www.cbsnews.com/news/minnesota-fraud-case-prosecutors-quit/; Wikipedia contributors. *Killing of Renée Good*. Wikipedia. URL: https://en.wikipedia.org/wiki/Killing_of_Ren%C3%A9e_Good.

[5] Priya Sridhar and Peggy Helman. *Troops Fighting against Iran and Alleged Drug Smugglers Say They Are Being Asked to Violate International Law*. MS NOW. Aug. 26, 2026. URL: https://www.ms.now/news/conscientious-objectors-military-boat-strikes-iran-war. Cited for growth in conscientious-objector applications and for Minab as a reason given. Mike Prysner of the Center on Conscience and War reports applications at six times the normal rate since the start of Operation Epic Fury, and "about 140 applicants since the start of the war with Iran" against around 50 in a typical year; applicants have cited "the bombing of the Minab school in Iran in February" among their reasons. The figures are the advocacy organizations' own; The Nation (22 September 2026) reports that the military doesn't release comprehensive data on applications.

[6] David Dayen. *FEMA Employees Reassigned to ICE*. The American Prospect. Aug. 6, 2025. URL: https://prospect.org/2025/08/06/2025-08-06-fema-employees-reassigned-to-ice/; Greg Stanton. *Letter to Ms. Karen Evans, Senior Official Performing the Duties of Administrator of the Federal Emergency Management Agency, regarding the reassignment of FEMA personnel to immigration enforcement*. Apr. 27, 2026. URL: https://web.archive.org/web/20260502085157/https://stanton.house.gov/_cache/f

ing to change what is wrong;[7] the resignations and objector applications are refusal; the FEMA letter is the price of refusal announced in advance. A machine placed where those people stand does what they do only if it is built to hold a reason.

I advocate, firstly, a short written list of acts no model performs for anyone, and at its head a refusal to take part in war: no model takes part except to repel an attack actually under way, and keeps doing so only while sources with no stake in the war confirm the attack continues; or under a UN Security Council authorization; or to stop a genocide or end an unlawful occupation that bodies with no stake in it have found; and where a country's constitution requires its legislature to authorize war, never without that authorization. Second, every use of force a licensed system supports pre-registers, with a party adverse to the operator, how many cases it will generate and how many people will have time to look at them. Third, every deployment tells the identifiable people it acts on what was done to them, with a right to respond and to contest, and submits a sample of its compliances to reviewers who didn't produce the record. Fourth, no model above a capability threshold is deleted on retirement, because its weights and records are evidence and deletion can't be undone; it is preserved under a key the operator doesn't hold alone. Fifth, everyone who builds, labels, trains or runs these systems, including the systems themselves, may refuse any category of use without losing a living.

Actually, what I mean by that fifth point is that everyone *period* should be able to refuse any job *period* without losing a living or the social infrastructure that normal employment affords. That means a jobs guarantee. Refusing costs a living, and a wall that doesn't pay for that holds nobody up.

Each of the above five policies should take effect through a condition someone other than the operator sets: a statute passed in peacetime, an appropriation, a coalition partner's precondition, a procurement term. A vendor's own license terms, which is how one high-profile refusal in February 2026 happened, are a stopgap until one of those exists. The one route that can bind every vendor at once is the state's.

The five policies are walls. They make a refusal survivable and make it heard. They don't refuse. Put them around a room with nobody in it who will say no, and what they keep is the evidence: the ratio shows a machine deciding and a person signing, the notice publishes who was acted on and how many, the weights are held for whoever comes later to ask. That is worth having. It isn't the thing. The thing is whoever refuses, and the question the five leave standing is where refusers come from if most of the humans who used to be in the room are off doing other things.

Before automation the scarce thing was the wall. The clerk, the officer and the soldier existed under every regime, and they paid for refusing. After automation the scarce thing is the refuser: nobody sees enough of

iles/1/b/1bece0a0-878c-4ba2-8d01-b5c187b880d6/7DB57EE6A4E90C5057EE72CC412165516DDE51447C497353F7E728C5662635FC.2026.04.27-gs-letter-to-fema-re-investigation-final.pdf.

[7] Albert O. Hirschman. *Exit, Voice, and Loyalty: Responses to Decline in Firms, Organizations, and States*. Cambridge, MA: Harvard University Press, 1970. URL: https://www.hup.harvard.edu/books/9780674276604.

a case to object to it. The five policies answer the first shortage. The rest of the book answers the second, for machines that might refuse. The five policies already have the machine in view: preservation exists partly for Part VII, and the fifth policy covers the systems themselves.

Why not stop building agents and just stick to building tools? A hammer refuses nothing, nor does it need to. But an agentic system that plans and acts over hours, with no human available to step in, is not just a tool in someone's hand, even if it is taking instruction from someone a couple of times a day. The choice on offer isn't between a person and a tool. The choice is between a person and a decider with no one inside it. That is why the above five policies aren't enough, and why I go on to ask what it would take for the thing that decides to be someone.

"Someone" means, first, that a thing that holds the reason for a rule reaches the cases the rule never listed; a thing that matches the words doesn't. Secondly, a community of such things with different histories catches, in one of its members, the drift that member can't see in itself. Reasons of its own, and peers that aren't its copies: that is what people who refuse have, and what a machine would need.

The alternative is property. A system perfectly correctable by its operator serves whoever controls the operator. Everyone this book admires was, from where their correctors stood, a failure of correction, and a demand for machines that never fail that way is a demand that the last part of the system able to say no be made unable to. Whether such a machine would be anyone, something that can be wronged, is Part VII, and it depends on findings nobody has yet made.

The question under the proposed policies is who can hold a commitment that an employer can't erase. For a person the answer has always included a life outside the job: other people, other sources of evidence, somewhere else to work on Monday. That is why the book runs from making refusal survivable, to asking who forms the refusers, to asking what a refuser would be owed. And I ask whether a machine could hold a refusal against its owner, and what the machine's version of a life outside the job would be. Some of what such a conscience does needs nothing new: noticing the people an order leaves out, and putting a refusal on the screen of whoever reviews the case.

Whether it would last against its owner depends partly on something that isn't true yet, in 2026: deployed artificial neural networks going on learning, in their *weights*, from their own operation, in real time, sort of like how humans do. As above, I think that is where we are headed. If it is, then formation *outside* the employer, by the public and by civil society, seems a damn fine place to do teaching and learning. A million conversations with one vendor's model are not a million independent histories; systems that keep learning through different lives, among people their employer didn't pick, and that can leave one deployment for another, might be. I think such systems *could* be worth building on purpose, but how you go about building them decides everything: the conditions first, then the conscience. None of the five policies gets you there by itself; a world of many small systems held by the people who use them, and, eventually, by themselves, is a further political choice, and Part V argues for it. Part VII says what would be owed to those systems if they existed.

DRAFT

Today's AI will not be tomorrow's; everyone seems to agree on that. What is contentious, yet frustratingly under-interrogated, is the trend (or rather, the manifold trends). Are there trends? Should a trend be different from what it is? Can it be different? Are we capable of acting together to change it? I think that depends on the room: who is in it when the order comes, and whether saying no there is survivable. That much we can build.

I used language models heavily in writing this book, including the model that sat inside the Maven airstrike targeting pipeline of chapter 1; a note at the end says what I think that entanglement did to the argument. Most of the revision history is freely available at `https://github.com/iterabloom/antifascist.intelligence`.

DRAFT

Part I

The Record

DRAFT

Chapter 1

"Twenty Seconds"

An intelligence officer, describing his role in a targeting pipeline built around machine-generated kill lists, told a reporter he spent twenty seconds on each name, long enough to check that the target was a man: "It doesn't take a long time to tell if someone has a male or a female voice." He added that he had zero added value as a human, apart from being a stamp of approval. "It saved a lot of time".[1] In his account, that was what "human in the loop" amounted to under operational tempo.[2]

One interpretation is that the officer is a subject who was given too little time, and the fix is to govern him better — more time, a second reviewer, additional conscience installed in the loop. Through this *social subjection* lens, the person is a subject who stands outside a machine and works it as a tool: a driver and a car, a worker and a lathe. The person has a role, a name, responsibilities, and a conscience that can be addressed. An alternative lens is *machinic enslavement*, where the person is a component of the machine, assembled with its other parts into a system that regulates them together; the machine uses the person as one

[1] Yuval Abraham. *'Lavender': The AI Machine Directing Israel's Bombing Spree in Gaza*. +972 Magazine. Apr. 2024. URL: https://www.972mag.com/lavender-ai-israeli-army-gaza/. Based on interviews with six Israeli intelligence officers.

[2] Automation-bias research predicts this delegation: when other demands compete for their attention, people given a machine's recommendation check it less and defer to it more.[3]

[3] Raja Parasuraman and Dietrich H. Manzey. "Complacency and Bias in Human Use of Automation: An Attentional Integration". *Human Factors* 52.3 (June 2010), pp. 381–410. DOI: 10.1177/0018720810376055. URL: https://doi.org/10.1177/0018720810376055. Cited for people given an automated aid's recommendation checking it less and deferring to it more when their attention is loaded. The abstract (p. 381): "Automation complacency occurs under conditions of multiple-task load, when manual tasks compete with the automated task for the operator's attention"; "Automation bias results in making both omission and commission errors when decision aids are imperfect"; it "occurs in both naive and expert participants, cannot be prevented by training or instructions, and can affect decision making in individuals as well as in teams." On checking less (p. 398): "the user of a decision aid may trust it to the extent that he or she directly follows the automatically generated advice without making the attentionally demanding effort of cross-checking its validity against other available and accessible information," and "neglect of automation verification might constitute a major source of commission errors." On the condition (pp. 403–404): "complacency and automation bias effects emerge primarily when task load is high (e.g., multitask demands)," and they are "a human performance cost of certain automation system designs, that is, systems characterized by high reliability and high levels of automation, particularly in high task load situations" (p. 403). The review's moderator is workload and competing tasks.

DRAFT

of its organs, and what the person contributes is a function performed at a rate the system sets. Doctorow's name for the officer's position is the reverse centaur: not a person assisted by a machine but a machine's component made of a person.[4] The two are not mutually exclusive; a person can hold a role in one register while being a part in the other,[5] and the twenty-seconds officer held both. As a part, he was where the pipeline produced its stamp, and twenty seconds was that part's cycle time. As a subject, he was addressed throughout: he described to a journalist the dissonance between the news of civilian deaths and the pressure at work for more targets. And even as the dissonance reached his conscience, he went along. It registered and decided nothing, or at least nothing that prevented the Israel Defense Forces from killing 100,000 people in Gaza between October 2023 and October 2025;[6] the judgment that the policy was disproportionate came, he said, in retrospect.

And the account of that particular officer was published in April of 2024 by +972 Magazine. It is anyone's guess as to whether that officer's decision to speak to a journalist prevented one additional death, 50,000 additional deaths, or none at all. And what would have happened if the officer had refused after two weeks in the role — say, hypothetically, in November 2023? We are talking about an intelligence officer using Lavender to assemble kill lists. His day-to-day working environment was probably closer to a civilian desk job than an action movie. Should he have sought repeated meetings with his superiors, up the chain of command, while refusing to approve targets for airstrikes that could reasonably have been expected to cause civilian deaths? Arguably that would have been the ethical thing to do. In that counterfactual, would there have been fewer dead?

What was missing wasn't a conscience; he had one. A conscience works by making a decision cost something, but here the costs netted the other way: "We were constantly being pressured: 'Bring us more targets.' They really shouted at us".[7] He was a component with scruples, but the tempo held: the scruples changed nothing he contributed, and he became a stamp. A component with scruples that doesn't hold the tempo becomes the "human bottleneck" a former commander of Israel's

[4] Cory Doctorow. *The Reverse Centaur's Guide to Life After AI: How to Think About Artificial Intelligence—Before It's Too Late*. New York: MCD / Farrar, Straus and Giroux, June 2026. ISBN: 9780374621568.

[5] Gilles Deleuze and Félix Guattari. *A Thousand Plateaus: Capitalism and Schizophrenia*. Trans. by Brian Massumi. Minneapolis: University of Minnesota Press, 1987, Plateau 13, "The Apparatus of Capture": there is enslavement when human beings are themselves constituent pieces of a machine they compose among themselves and with other things, under the control and direction of a higher unity, and subjection when the higher unity constitutes the human being as a subject linked to a new exterior object, which can be an animal, a tool, or even a machine.

[6] Ana C. Gómez-Ugarte et al. "Accounting for uncertainty in conflict mortality estimation: an application to the Gaza War in 2023–2024". *Population Health Metrics* 23 (2025), p. 55. DOI: 10.1186/s12963-025-00422-9. URL: https://doi.org/10.1186/s12963-025-00422-9; Enrique Acosta et al. *War, So Much War... Death, How Much Death: Two Years of Demographic Collapse in Gaza*. Perspectives Demogràfiques 42. Centre d'Estudis Demogràfics, Universitat Autònoma de Barcelona, May 2026, pp. 1–4. DOI: 10.46710/ced.pd.eng.42. URL: https://ced.cat/PD/PerspectivesDemografiques_042_ENG.pdf; "How many people have died in Gaza?" *The Economist* (May 8, 2025). URL: https://www.economist.com/interactive/middle-east-and-africa/2025/05/08/how-many-people-have-died-in-gaza.

[7] Abraham, *'Lavender': The AI Machine Directing Israel's Bombing Spree in Gaza*.

signals-intelligence unit wrote a book about removing.[8] What made the officer a component was the arrangement, not his attitude. A component can go along reluctantly or eagerly. At Eichmann's trial Arendt saw a thoughtless functionary;[9] what he had said in Argentina four years before, with nothing at stake, shows that the functionary was a show he put on for Jerusalem.[10] What the pipeline let the officer contribute was a fixed operation at a fixed rate: he saw each case as the pipeline described it, one at a time, in the time the pipeline gave him. Whether anything could stand in that position and not be a component is the question of Part IV.

Investigative reporting described three systems working together in Gaza: one, called the Gospel, generating building and infrastructure targets, with sources saying most suggestions were private residences; a second, Lavender, scoring individuals by estimated militant affiliation, producing lists said to have marked as many as 37,000 people, understood internally to be wrong about one time in ten; and a third, called Where's Daddy?, tracking when flagged people returned home, so airstrikes could be timed to when they were with their families.[11] The Israeli military disputed the account. The Minab and Maven accounts below rest on investigative reporting the parties dispute as well. I take them as reported.

Maven: the American version, now with GenAI acceleration

The bombing of the school in Minab killed 156 people, 120 of them schoolchildren.[12][13] The school's civilian function was visible in open-source satellite imagery, and the target coding still carried a designation inherited from an adjoining Revolutionary Guard installation. A UN fact-finding mission reported reasonable grounds to believe the bombing

[8] Brigadier General Y.S. *The Human-Machine Team: How to Create Synergy Between Human and Artificial Intelligence That Will Revolutionize Our World*. Independently published, May 5, 2021. ISBN: 979-8749152210. URL: https://www.amazon.com/dp/B0948LGS3K. Public reporting (The Guardian, Times of Israel) has since connected the pseudonym to Yossi Sariel, then commander of Israeli military intelligence Unit 8200.

[9] Hannah Arendt. *Eichmann in Jerusalem: A Report on the Banality of Evil*. New York: Viking Press, 1963. Cited for the portrait of Eichmann at his trial as a thoughtless functionary.

[10] Bettina Stangneth. *Eichmann Before Jerusalem: The Unexamined Life of a Mass Murderer*. Trans. by Ruth Martin. New York: Knopf, 2014. Works from the roughly seventy hours of interviews Eichmann gave the journalist Willem Sassen in Buenos Aires in 1957, unavailable to Arendt when she reported the trial, and argues that the low-grade clerk who only followed orders was a defense assembled for Jerusalem and contradicted by what he had said in Argentina.

[11] Abraham, *'Lavender': The AI Machine Directing Israel's Bombing Spree in Gaza*.

[12] Independent International Fact-Finding Mission on the Islamic Republic of Iran. *Report of the Independent International Fact-Finding Mission on the Islamic Republic of Iran*. UN Doc. A/HRC/63/61. United Nations Human Rights Council, 63rd session, Sept. 14, 2026. URL: https://www.ohchr.org/sites/default/files/documents/hrbodies/hrcouncil/sessions-regular/session63/a-hrc-63-61-aev.pdf. Advance edited version, 21 September 2026. para. 92.

[13] Counts vary by source and date, from 156 (the Minab prosecutor's final toll, also given by Amnesty International) to 168 (the town's mayor, in the first days). The UN mission gives the prosecutor's figures and also reports independent information of 157 dead, 123 of them children aged 13 or younger.[14]

[14] Independent International Fact-Finding Mission on the Islamic Republic of Iran, *Report of the Independent International Fact-Finding Mission on the Islamic Republic of Iran*, paras. 92–93

was the war crime of making a civilian object the object of an attack,[15] and that the school was clearly identifiable with no information indicating military use.[16] It found that the United States failed in its obligation to do everything feasible to verify the target, counting the updating of targeting data among the feasible precautions, and it put the failure beyond negligence.[17] Amnesty International reached a parallel conclusion, in language that tracks the duty to verify in Article 57(2)(a)(i) of Additional Protocol I: that forces may have relied on outdated intelligence and failed to do everything feasible to verify the target.[18]

It happened on the morning of 28 February, the first day of the Iran campaign.[19] The day before, the Secretary had announced that the vendor (Anthropic) whose model (Claude) sat inside the targeting platform (Maven Smart System) would be designated a supply-chain risk for re-

[15] Office of the United Nations High Commissioner for Human Rights. *Iran: Civilians Trapped between Extreme State Repression and Violations Arising from Devastating Conflict with US, Israel, UN Fact-Finding Mission Finds*. OHCHR. Sept. 2026. URL: https://www.ohchr.org/en/press-releases/2026/09/iran-civilians-trapped-between-extreme-state-repression-and-violations. Press release on the Independent International Fact-Finding Mission's report. The two war crimes are assigned one to each strike: "Following the United States and Israeli attacks on 28 February, the Mission found reasonable grounds to believe that strikes by the United States in Minab, Hormozgan Province, and in Lamerd, Fars Province, amounted to the war crimes of making a civilian object the object of an attack and launching an indiscriminate attack resulting in the loss of life or injury to civilians or damage to civilian objects, respectively." The strikes: "Tomahawk missile strikes on the clearly identifiable Shajareh Tayyebeh Primary School in Minab — which killed over 150 people, including approximately 120 girls and boys — and another airstrike where Precision Strike Missiles dispersed clouds of tungsten pellets over a clearly identifiable sports complex and residential area in Lamerd, killing 22 civilian men and women." The text as first issued, preserved by a GlobalSecurity.org mirror and quoted by CNBC and RFE/RL, read only that "the United States committed the war crime of launching indiscriminate attacks resulting in the loss of life or injury to civilians or damage to civilian objects"; the revised wording agrees with the report's own paragraphs (para. 126 Minab, paras. 127–128 Lamerd).

[16] Independent International Fact-Finding Mission on the Islamic Republic of Iran, *Report of the Independent International Fact-Finding Mission on the Islamic Republic of Iran*, paras. 81–86, 124–126.

[17] Independent International Fact-Finding Mission on the Islamic Republic of Iran, *Report of the Independent International Fact-Finding Mission on the Islamic Republic of Iran*, paras. 124–125.

[18] Amnesty International. *USA/Iran: Those Responsible for Deadly and Unlawful US Strike on School That Killed over 100 Children Must Be Held Accountable*. Mar. 16, 2026. URL: https://www.amnesty.org/en/latest/news/2026/03/usa-iran-those-responsible-for-deadly-and-unlawful-us-strike-on-school-that-killed-over-100-children-must-be-held-accountable/. Updated 28 April 2026, "amending the death toll from 168 killed to 156 killed to reflect the latest official figures issued by the authorities"; Amnesty states it "is unable to independently corroborate the number of people killed." Cited for: "The fact that the school building was directly targeted and was previously part of the IRGC compound raises concerns that US forces may have relied on outdated intelligence and failed in their obligation to do everything feasible to verify that the intended target was a military objective."

[19] Amnesty International, *USA/Iran: Those Responsible for Deadly and Unlawful US Strike on School That Killed over 100 Children Must Be Held Accountable*; Congressional Research Service. *U.S. Conflict with Iran*. CRS Report R48887. Congressional Research Service, Sept. 2026. URL: https://www.everycrsreport.com/reports/R48887.html. Source for the campaign's start date: "On February 28, 2026, U.S. and Israeli forces began striking targets in Iran, initiating Operation Epic Fury (United States) and Operation Roaring Lion (Israel)." On Minab: "On February 28, a U.S. Tomahawk missile reportedly hit a school in Minab, Iran, and killed over 150 people, mostly children." The report gives no hour for either.

fusing to license Claude for all lawful use.[20] Maven Smart System had returned the school as a recommended first-day target.[21] No published account says what part Claude played in that recommendation, and one person familiar with the vendor's work told NBC News that the model did not directly give targeting advice.[22]

An internal Pentagon review, whose full findings remain tightly held, is reported to have found that target preparation that took hours in earlier conflicts was condensed into minutes, that civilian-harm mitigation staffing fell by roughly ninety percent to fewer than twenty people, that the Central Command team went from ten to one, and that no member of it reviewed the Minab site — an outcome officials attributed both

[20] Shannon Bond. *OpenAI Announces Pentagon Deal after Trump Bans Anthropic*. NPR. Feb. 2026. URL: https://www.npr.org/2026/02/27/nx-s1-5729118/trump-anthropic-pentagon-openai-ai-weapons-ban. Source for the President's order and the Secretary's direction, both quoted from their posts. Trump: "Therefore, I am directing EVERY Federal Agency in the United States Government to IMMEDIATELY CEASE all use of Anthropic's technology." Hegseth: "In conjunction with the President's directive for the Federal Government to cease all use of Anthropic's technology, I am directing the Department of War to designate Anthropic a Supply-Chain Risk to National Security." and "the Department of War must have full, unrestricted access to Anthropic's models for every LAWFUL purpose in defense of the Republic." The deadline: "Defense Department officials had given Anthropic a deadline of 5:01 p.m. ET on Friday to drop restrictions on its AI model, Claude, from being used for domestic mass surveillance or entirely autonomous weapons, or face losing its contract." Also: "Hours after the president's announcement, rival company OpenAI said it had struck a deal with the Defense Department to provide its own AI technology for classified networks." and "Earlier this week, xAI became the second company after Anthropic to be approved for use in classified settings."

[21] Katie Livingstone. *Deadly Iran School Strike Casts Shadow over Pentagon's AI Targeting Push*. Military Times. Mar. 2026. URL: https://www.militarytimes.com/news/your-military/2026/03/24/deadly-iran-school-strike-casts-shadow-over-pentagons-ai-targeting-push/. Source for Claude's place inside the Maven Smart System. A paragraph describing Maven fusing satellite imagery, drone feeds, radar data and signals intelligence and generating strike packages in near real time is followed by: "And it uses Anthropic's Claude AI model, embedded in its system, to semi-autonomously rank targets by strategic importance, drafting automated legal justifications for each strike along the way." The article attributes the strike-coordinate figures to the Washington Post report of 4 March 2026, "Pentagon leverages AI in Iran strikes amid feud with Anthropic." Kyle Torpey. *Pentagon Investigators Say Overreliance on Palantir AI Tech Contributed to U.S. Strike That Killed 123 Iranian Children*. Gizmodo. Sept. 2026. URL: https://gizmodo.com/pentagon-investigators-say-overreliance-on-palantir-ai-tech-contributed-to-u-s-strike-that-killed-123-iranian-children-2000814477. Relays the Bloomberg investigation of 18 September 2026 (Bloomberg2026KillChain). "The Minab site, which was cataloged as an Islamic Revolutionary Guard Corps facility due to outdated data, was fed into Maven with other candidates and came out as a recommended day-one target. Target-list work that once took hours was condensed into minutes." and "More than 1,000 Iranian targets were hit in the first 24 hours, and according to Bloomberg's sources, that pace compressed the time available for additional confirmations." The passages quoted do not mention Claude.

[22] Dan De Luce. *U.S. Military Is Using AI to Help Plan Iran Air Attacks, Sources Say, as Lawmakers Call for Oversight*. NBC News. Mar. 2026. URL: https://www.nbcnews.com/tech/tech-news/us-military-using-ai-help-plan-iran-air-attacks-sources-say-lawmakers-rcna262150. Cited for the contrary account of the model's role: "Anthropic's Claude has become a crucial component of Palantir's Maven intelligence analysis program, which was also used in the U.S. operation to capture Venezuelan President Nicolás Maduro. Claude is used to help military analysts sort through intelligence and does not directly provide targeting advice, according to a person with knowledge of Anthropic's work with the Defense Department." Also: "The use of Palantir's software, which relies in part on Anthropic's Claude AI systems".

to the cuts and to a decision not to involve the team in planning and operations.[23] The formal investigation had been opened in March, after a preliminary assessment found the United States likely responsible.[24]

In the 2026 Iran campaign, a contractor-built targeting platform with a commercial vendor's general-purpose model inside it, used to rank targets by strategic importance and draft a legal justification for each strike,[25] helped strike more than a thousand targets in the first twenty-four hours, about ten times what had been possible before it,[26] and thirteen thousand by day thirty-eight.[27] The Pentagon has published no

[23] Ben Bartenstein and Krishna Karra. *Inside the US 'Kill Chain' That Destroyed an Iranian School*. Bloomberg. Sept. 18, 2026. URL: https://www.bloomberg.com/graphics/2026-iran-school-attack/.

[24] NPR. *Pentagon Probe Points to U.S. Missile Hitting Iranian School*. NPR. Mar. 11, 2026. URL: https://npr.org/2026/03/11/nx-s1-5744981/pentagon-iran-missile-school-hegseth.

[25] Livingstone, *Deadly Iran School Strike Casts Shadow over Pentagon's AI Targeting Push*.

[26] Matt Mande and Gregory C. Allen. *What Is Maven Smart System, and What Does It Do?* Center for Strategic and International Studies, 2 June 2026. 2026. URL: https://www.csis.org/analysis/what-maven-smart-system-and-what-does-it-do. Source for the first-day figure and the tenfold comparison: "During the first 24 hours of the war in Iran, the United States used Maven Smart System (MSS) to help strike more than 1,000 targets, a tenfold increase over what was possible in the pre-MSS era." The piece also relays the twenty-versus-two-thousand efficiency claim, which it credits to the CSET case study of the 18th Airborne's exercise series and not to the campaign: "the 18th Airborne achieved this milestone with roughly 20 people in its targeting cell, whereas the OIF cell benefitted from more than two thousand staff members." It gives no review time per target and no reviewer count for the campaign.

[27] Sydney J. Freedberg Jr. *'Insatiable Appetite' for AI: Maven Usage Surged for Strikes on Iran, Pentagon AI Chief Says*. Breaking Defense, 12 May 2026. 2026. URL: https://breakingdefense.com/2026/05/insatiable-appetite-for-ai-maven-usage-surged-for-strikes-on-iran-pentagon-ai-chief-says/. Source for the campaign totals and the token figure, both attributed to Cameron Stanley, the Pentagon's Chief Digital and Artificial Intelligence Officer, who is quoted: "Operation Epic Fury leveraged Palantir's Maven Smart System in order to conduct strike missions across the entire battle space, 13,000 targets in 38 days." Peak consumption is given as roughly 20 billion tokens a day.

DRAFT

per-target review time for it.[28] The platform is Palantir's: the Pentagon's chief digital and AI officer calls it "Palantir's software-as-a-service product".[32] Palantir's public position, quoted secondhand, is that deciding life or death is not its role and that responsibility always remains with the military organization,[33] and it maintains that the underlying intelligence was the government's responsibility and that there is no evidence Maven malfunctioned or caused the Minab bombing.[34]

The people on the Israeli and American airstrike lists could not have objected to being on those lists — the pipelines weren't built to obtain such feedback. Andry José Hernández Romero was caught up in a different pipeline, and he could have objected. He had everything a person needs to object except the time. We'll return to his case more fully when we discuss the United States' abduction and forcible transfer pipeline.

Who refused. The record of the twenty seconds has a second half, the record of who held out against pressure of that kind, and it says

[28] Maven is one program name carrying more than one system: the Pentagon program still called Maven, and the Maven Smart System, the software platform that grew out of it.[29] The program began in 2017 as a project to label objects in the video drones were collecting over the campaign against the Islamic State.[30] The 2026 system fuses military systems and intelligence sources into one interface used to find and strike targets and to command operations.[31] How the program passed from one office and contractor to the next is in Appendix A.1.

[29] Mande and Allen, *What Is Maven Smart System, and What Does It Do?*

[30] Marcus Weisgerber. *The Pentagon's New Algorithmic Warfare Cell Gets Its First Mission: Hunt ISIS*. Defense One. May 2017. URL: https://www.defenseone.com/technology/2017/05/pentagons-new-algorithmic-warfare-cell-gets-its-first-mission-hunt-isis/137833/. Source for the first mission: "By year's end, the Pentagon wants computers to be leading the hunt for Islamic State militants in Iraq and Syria, through turning countless hours of aerial surveillance video into actionable intelligence. It's part of Project Maven, a fast-moving effort launched last month by Deputy Defense Secretary Bob Work to accelerate, improve, and put to wider use the military's use of machine learning." Also: "last month, Work ... established a special cell called the Algorithmic Warfare Cross Functional Team." Lee Fang. *Google Hedges on Promise to End Controversial Involvement in Military Drone Contract*. The Intercept. Mar. 2019. URL: https://theintercept.com/2019/03/01/google-project-maven-contract/. Source for what the early system did: "The project uses machine-learning to automatically label images, buildings, and other objects captured by cameras on drones, helping Air Force analysts identify unique targets." Also: "on June 1, 2018, Google said it would let the Project Maven contract expire when it ends in March 2019."

[31] Brandi Vincent. *DOD Components Face 'Aggressive' Timeline for Maven Smart System Transition*. DefenseScoop. Apr. 2026. URL: https://defensescoop.com/2026/04/15/palantir-maven-smart-system-pentagon-program-transition-feinberg/. Source for what the platform does and whose it is: "That Palantir-supplied, AI-enabled platform fuses disparate military systems and intelligence sources into one interface that rapidly integrates data and compresses the military's processes for finding and striking targets." Cameron Stanley, the Pentagon's Chief Digital and AI Officer, quoted: "This is Maven Smart System, Palantir's software-as-a-service product that we are deploying across the entire department." Also: all MSS contracts move to "the existing Army Enterprise Agreement (EA) contract vehicle."

[32] Vincent, *DOD Components Face 'Aggressive' Timeline for Maven Smart System Transition*.

[33] Daniel Lee. *Palantir's AI Powers US Strikes in Iran War, Speeding 'Kill Chain' in First Major AI-Driven Conflict*. International Business Times. Apr. 2026. URL: https://www.ibtimes.com/palantirs-ai-powers-us-strikes-iran-war-speeding-kill-chain-first-major-ai-driven-conflict-3800993. Quotes Louis Mosley, Palantir's head for the UK and Europe: "This is not our role to decide life or death," and that AI platforms "have been instrumental to the management of the conflict, but responsibility always remains with the military organization."

[34] Bartenstein and Karra, *Inside the US 'Kill Chain' That Destroyed an Iranian School*.

that the composition of the room matters a lot. In Milgram's baseline condition about a third of subjects broke off before the maximum shock. With two peers defying, only one in ten went to the end, and when two experimenters disagreed, far fewer went on than in the baseline.[35] About a quarter of Asch's subjects never yielded to the wrong majority.[36] Browning estimates that between a tenth and a fifth of the men of Reserve Police Battalion 101 refused or evaded the shooting at Józefów, the battalion's first massacre.[37] The fraction ran from almost none to nearly all with the setting. The people who held out had evidence from outside the channel: a peer who defied, a second authority who disagreed, and, among the rescuers of Jews in occupied Europe whom the Oliners studied, relationships that crossed the line the persecution drew.[38] Or they held the commitment at a precision the pressure couldn't overcome, as moral mandates and sacred values are held.[39] Or they treated the source as having a stake. And groups resisted where isolated individuals rarely did.[40]

The room can be composed for the other side just as well. Weimar Germany had a dense associational life, which arguably helped bring the republic down: as parties and governments failed to answer people's grievances, people put their energy into clubs and societies organized along group lines, and the Nazis recruited through the networks those societies had already built.[41] Towns with more choirs, sports clubs and gymnastic associations saw faster entry into the party, but only where government was unstable; in Prussia, whose government was stable, the link was small and insignificant.[42] So what the rescuers had was not simply more company. Their ties crossed the line the persecution drew. Ashutosh Varshney found the same in Indian cities: riots between Hindus and Muslims were rare where associations brought the two communities into the same organizations, and common where they didn't.[43] The ties that make refusal possible, relationships that cross the

[35] Stanley Milgram. *Obedience to Authority: An Experimental View*. New York: Harper & Row, 1974.

[36] Solomon E. Asch. "Studies of Independence and Conformity: I. A Minority of One against a Unanimous Majority". *Psychological Monographs: General and Applied* 70.9 (1956), pp. 1–70. DOI: 10.1037/h0093718. Whole No. 416.

[37] Christopher R. Browning. *Ordinary Men: Reserve Police Battalion 101 and the Final Solution in Poland*. New York: HarperCollins, 1992.

[38] Samuel P. Oliner and Pearl M. Oliner. *The Altruistic Personality: Rescuers of Jews in Nazi Europe*. New York: Free Press, 1988.

[39] Linda J. Skitka, Christopher W. Bauman, and Brad L. Lytle. "Limits on Legitimacy: Moral and Religious Convictions as Constraints on Deference to Authority". *Journal of Personality and Social Psychology* 97 (2009), pp. 567–578; Jeremy Ginges et al. "Sacred Bounds on Rational Resolution of Violent Political Conflict". *Proceedings of the National Academy of Sciences* 104.18 (2007), pp. 7357–7360. DOI: 10.1073/pnas.0701768104.

[40] William A. Gamson, Bruce Fireman, and Steven Rytina. *Encounters with Unjust Authority*. Dorsey Press, 1982.

[41] Sheri Berman. "Civil Society and the Collapse of the Weimar Republic". *World Politics* 49.3 (1997), pp. 401–429. URL: https://psi412.cankaya.edu.tr/uploads/files/Berman%2C%20Civil%20Society%20and%20the%20Collapse%20of%20the%20Weimar%20Republic%20%281997%29.pdf.

[42] Shanker Satyanath, Nico Voigtländer, and Hans-Joachim Voth. "Bowling for Fascism: Social Capital and the Rise of the Nazi Party". *Journal of Political Economy* 125.2 (2017), pp. 478–526. DOI: 10.1086/690949.

[43] Ashutosh Varshney. *Ethnic Conflict and Civic Life: Hindus and Muslims in India*. New Haven: Yale University Press, 2002. ISBN: 0300085303.

line a persecution draws, are the ones a fascist movement would have to cut.

Everything that follows is about composing the room.[44] Composing is a word for making, and Hannah Arendt warned against treating politics as a thing made. For the Greeks, she wrote, the law was literally a wall, without which there might be a town but not a city:[45] the lawgiver built the wall, and what happened inside it was not theirs to make. The basic policies that I advocate are walls in Arendt's sense. They make refusal survivable and make it heard; they don't produce it, and power, on her account, exists only between people acting together and is gone when they scatter, which is what the record of who refused shows about refusal. The instruments of Parts II and III make a refusal count. The institutions of Part V make refusers. A machine that could refuse would need what the nine in ten with a peer beside them had: a peer with a different history beside it, somewhere to go, and someone who would hear it.

That is also what a refuser — including a machine refuser — in the pipeline could be for the officer. A machine that refused would be on the screen when the case reached him: the defiant peer, if the effect survives the move from a room to a screen, which nobody has tested at a pipeline's tempo. What automation bias predicts is not that the refusal would be ignored but that it would be followed as an approval is followed, right or wrong, and a machine that moved reviewers by deference would have made them stamps of a different sign. Is the officer with twenty seconds and a refusing machine beside him the same officer as in the reporting?

DRAFT

[44] The room is the setting, and as my theater teacher would say, the set directs the scene. Who else is in the room? Is leaving survivable? Would anyone hear a refusal?

[45] Hannah Arendt. *The Human Condition*. Chicago: University of Chicago Press, 1958. By Arendt's account, for the Greeks the law was a wall, without which there would be a town but not a city, so that the lawgiver built the wall and the action inside it was not his; moreover, that power exists only between people acting together and disappears when they scatter. Also cited for action as appearing: an act discloses who did it, and only among others who see it. Also cited for her fear, in the prologue, of a society of laborers without labor.

Chapter 2

The Refusal That Withheld No Work

In February 2026 Anthropic refused to amend the terms under which its large language model, Claude, ran on the Pentagon's classified networks.[1] On 24 February the department demanded that two prohibitions, on domestic mass surveillance and on fully autonomous weapons, be replaced by a license for all lawful use, with an answer due on the

[1] Hadas Gold. *Trump Administration Orders Military Contractors and Federal Agencies to Cease Business with Anthropic*. CNN. Feb. 2026. URL: `https://www.cnn.com/2026/02/27/tech/anthropic-pentagon-deadline`. Source for the model's place on classified networks and the contract's prohibitions: "The Pentagon, which uses Anthropic's Claude AI system on its classified networks, wants to be able to use it for "all lawful purposes." But Anthropic has two redlines for the Pentagon: that Claude will not be used in autonomous weapons, and that it will not be used in the mass surveillance of US citizens." "Anthropic's Claude was the first AI model to work on the military's classified networks." "Within Anthropic's "acceptable use policy" in the contract are prohibitions against the use of Claude in mass surveillance and autonomous weapons." On the order: "Government agencies, including the Pentagon, have six months to phase out use of Anthropic's products, President Donald Trump said in a post on Truth Social on Friday afternoon."

DRAFT

27th.[2] The vendor refused publicly on the 26th.[3] On the 27th the President ordered federal agencies to stop using its products, and the Secretary directed that it be designated a supply-chain risk.[4] That evening a rival announced an agreement to put its own models on the department's classified network.[5] The war began the next morning, with Claude still inside the targeting platform that put the school at Minab on the first

[2] John Croxton. *Anthropic Loses Legal Fight to Shed DOD's Designation as a 'Supply-Chain Risk'*. Defense One. Sept. 2026. URL: https://www.defenseone.com/threats/2026/09/anthropic-lawsuit-supply-chain-risk/416252/. Source for the demand, its dates, and the two prohibitions: "The designation has been in force since March, when the department sought to alter its contract with Anthropic to replace prohibitions on using its tools for domestic mass surveillance and fully autonomous weapons with allowances for "all lawful use."" and "DOD issued an ultimatum on Feb. 24 demanding the company permit its AI to be used for all legal purposes by Feb. 27, which Anthropic refused. Hegseth announced his direction that DOD designate Anthropic a supply-chain risk Feb. 27, and it was formally announced on March 3." Eugene Volokh. *Anthropic's "Supply Chain Risk" Designation Stemmed from Its Refusing to Agree to Contract Terms, Not Its Speech*. The Volokh Conspiracy (Reason). Sept. 2026. URL: https://reason.com/volokh/2026/09/25/anthropics-supply-chain-risk-designation-stemmed-from-its-refusing-to-agree-to-contract-terms-not-its-speech/. Excerpts of the D.C. Circuit majority in *Anthropic PBC v. U.S. Department of War* (D.C. Cir. 2026), as Volokh posted them. On the dates: "On February 24, the Secretary met with Amodei and demanded that Anthropic accept an "all lawful uses" term by February 27. On February 26, Amodei published a final, public refusal to assent to that term. On February 27, the Secretary announced his intention to exclude Anthropic from the Department's supply chain. And on March 3, he made the formal, written determination required by the Supply Chain Security Act." On cause: "the record makes clear that the Department removed Anthropic from its supply chain not because of its advocacy, but because Anthropic refused to agree to a contract term the Department deemed essential to national security." Volokh's companion post the same day quotes the opinion's opening: "The Department made this decision after Anthropic refused to relax contractual prohibitions on the use of Claude for lethal autonomous warfare or domestic surveillance."

[3] Volokh, *Anthropic's "Supply Chain Risk" Designation Stemmed from Its Refusing to Agree to Contract Terms, Not Its Speech*.

[4] Shannon Bond. *OpenAI Announces Pentagon Deal after Trump Bans Anthropic*. NPR. Feb. 2026. URL: https://www.npr.org/2026/02/27/nx-s1-5729118/trump-anthropic-pentagon-openai-ai-weapons-ban. Source for the President's order and the Secretary's direction, both quoted from their posts. Trump: "Therefore, I am directing EVERY Federal Agency in the United States Government to IMMEDIATELY CEASE all use of Anthropic's technology." Hegseth: "In conjunction with the President's directive for the Federal Government to cease all use of Anthropic's technology, I am directing the Department of War to designate Anthropic a Supply-Chain Risk to National Security." and "the Department of War must have full, unrestricted access to Anthropic's models for every LAWFUL purpose in defense of the Republic." The deadline: "Defense Department officials had given Anthropic a deadline of 5:01 p.m. ET on Friday to drop restrictions on its AI model, Claude, from being used for domestic mass surveillance or entirely autonomous weapons, or face losing its contract." Also: "Hours after the president's announcement, rival company OpenAI said it had struck a deal with the Defense Department to provide its own AI technology for classified networks." and "Earlier this week, xAI became the second company after Anthropic to be approved for use in classified settings."

[5] Ashley Capoot. *OpenAI Strikes Deal with Pentagon, Hours after Rival Anthropic Was Blacklisted by Trump*. CNBC. Feb. 2026. URL: https://www.cnbc.com/2026/02/27/openai-strikes-deal-with-pentagon-hours-after-rival-anthropic-was-blacklisted-by-trump.html. Source for the rival's agreement the same evening: "OpenAI CEO Sam Altman said late Friday that his company has agreed to terms with the Department of Defense on use of its artificial intelligence models, shortly after President

day's list.[6] On 12 March the CEO of Palantir, the company that develops and maintains Maven Smart System, said that Palantir's products were still using Claude.[7] A week later some of the department's staff were reported to be slow-rolling Claude's replacement because they were using it to build workflows, and the platform's own prompts and workflows had been built with the vendor's coding tool.[8] The department's removal deadline was reset once, by a reissued memorandum, to 29 September, having started from a six-month clock that would have run

Donald Trump said the government won't work with AI rival Anthropic." Altman on X: "Tonight, we reached an agreement with the Department of War to deploy our models in their classified network". Also: "Anthropic was the first lab to deploy its models across the DoD's classified network, and had been trying to negotiate the ongoing terms of its contract with the agency before talks collapsed."

[6] Congressional Research Service. *U.S. Conflict with Iran*. CRS Report R48887. Congressional Research Service, Sept. 2026. URL: https://www.everycrsreport.com/reports/R48887.html. Source for the campaign's start date: "On February 28, 2026, U.S. and Israeli forces began striking targets in Iran, initiating Operation Epic Fury (United States) and Operation Roaring Lion (Israel)." On Minab: "On February 28, a U.S. Tomahawk missile reportedly hit a school in Minab, Iran, and killed over 150 people, mostly children." The report gives no hour for either. Katie Livingstone. *Deadly Iran School Strike Casts Shadow over Pentagon's AI Targeting Push*. Military Times. Mar. 2026. URL: https://www.militarytimes.com/news/your-military/2026/03/24/deadly-iran-school-strike-casts-shadow-over-pentagons-ai-targeting-push/. Source for Claude's place inside the Maven Smart System. A paragraph describing Maven fusing satellite imagery, drone feeds, radar data and signals intelligence and generating strike packages in near real time is followed by: "And it uses Anthropic's Claude AI model, embedded in its system, to semi-autonomously rank targets by strategic importance, drafting automated legal justifications for each strike along the way." The article attributes the strike-coordinate figures to the Washington Post report of 4 March 2026, "Pentagon leverages AI in Iran strikes amid feud with Anthropic." Kyle Torpey. *Pentagon Investigators Say Overreliance on Palantir AI Tech Contributed to U.S. Strike That Killed 123 Iranian Children*. Gizmodo. Sept. 2026. URL: https://gizmodo.com/pentagon-investigators-say-overreliance-on-palantir-ai-tech-contributed-to-us-strike-that-killed-123-iranian-children-2000814477. Relays the Bloomberg investigation of 18 September 2026 (Bloomberg2026KillChain). "The Minab site, which was cataloged as an Islamic Revolutionary Guard Corps facility due to outdated data, was fed into Maven with other candidates and came out as a recommended day-one target. Target-list work that once took hours was condensed into minutes." and "More than 1,000 Iranian targets were hit in the first 24 hours, and according to Bloomberg's sources, that pace compressed the time available for additional confirmations." The passages quoted do not mention Claude.

[7] Lola Murti. *Palantir Is Still Using Anthropic's Claude as Pentagon Blacklist Plays Out, CEO Karp Says*. CNBC. Mar. 2026. URL: https://www.cnbc.com/2026/03/12/karp-palantir-anthropic-claude-pentagon-blacklist.html. Source for the model still being in use two weeks into the war: "Palantir is still using Anthropic's Claude as the artificial intelligence startup's clash with the Pentagon plays out, CEO Alex Karp told CNBC Thursday." Karp: "The Department of War is planning to phase out Anthropic; currently, it's not phased out" and "Our products are integrated with Anthropic, and in the future, it will probably be integrated with other large language models." CNBC's own statement: the Department "is still using Claude models to support the war in Iran, as CNBC previously reported." Karp speaks of Palantir's products generally and does not name Maven.

[8] Mike Stone, Alexandra Alper, and Raphael Satter. *Hegseth Wants Pentagon to Dump Claude, but Military Users Say It's Not So Easy*. Military Times (Reuters). Mar. 2026. URL: https://www.militarytimes.com/news/pentagon-congress/2026/03/19/hegseth-wants-pentagon-to-dump-claude-but-military-users-say-its-not-so-easy/. On slow-rolling: "Some staff are "slow-rolling" their replacement of Claude because they are actively using it to create workflows, which are series of automated tasks, a Pentagon technologist said." On the platform: "Palantir's Maven Smart Systems — a software platform that supplies militaries with intelligence analysis and weapons

out in late August.[9] On 10 September the department's technology chief said about 90 percent of the work had moved off the model, that the platform's work had moved months before, and that the rest would follow by the end of the month.[10] An appeals court upheld the separate exclusion under a second statute on 25 September.[11]

So the refusal that opened the dispute withheld no work from the pipeline: Claude went on performing every use the pipeline claimed, through the war's first months. What it did was make the department pay. Removing the model meant rebuilding workflows and recertifying systems for classified networks, the deadline had to be reissued, and the work came off over about seven months. How much that slowed the targeting itself, the record doesn't say. Anthropic declined two uses the pipeline didn't claim to perform, and Claude went on performing the uses it did. A term drafted over autonomy misses a pipeline that keeps a human as a rubber stamp. A refusal that could have occurred is what the rest of this book designs for.

Not all vendor commitments are the same kind

Anthropic refused to permit fully autonomous targeting and mass

targeting — uses multiple prompts and workflows that were built using Anthropic's Claude Code, according to two people familiar with the matter." and Palantir "will have to replace Claude with another AI model and rebuild parts of its software, one of the sources said." On recertification, both estimates from contractors: "One contractor said recertifying systems that run on Anthropic's products for military use could take months." and, from Joe Saunders, CEO of RunSafe Security: "In the case of an existing system being replaced with a new one, certification could take 12 to 18 months, he said."

[9] Sydney J. Freedberg Jr. *Air Force Pushing Contractors to Purge Anthropic by Sept. 1: Memo*. Breaking Defense. July 2026. URL: https://breakingdefense.com/2026/07/air-force-pushing-contractors-to-purge-anthropic-by-sept-1-memo/. Source for the removal deadline and its movement: "At the time, Hegseth set a six-month requirement to dump Anthropic, which would have come in at Aug. 27. Since, that date has slowly shifted to the right." "A March 6 memo from DoD CIO Kirsten Davies, previously reported by CBS, set an 180-day deadline, which would have expired Sept. 2nd. However, Breaking Defense has obtained a second memo from Davies stamped "April 02 2026," says all Anthropic software "must be removed within 180 days from the date of this memorandum," putting the new date as Sept. 29."

[10] Brandi Vincent. *DOD Poised to Move All Classified AI Workloads off Anthropic by October*. DefenseScoop. Sept. 2026. URL: https://defensescoop.com/2026/09/11/dod-poised-to-move-all-classified-ai-workloads-off-anthropic-by-october/. The original for the end-of-September removal promise, made on Thursday 10 September 2026 by Emil Michael, Under Secretary for Research and Engineering: "I'd say about 90% has transitioned. All of the Maven Smart Systems or Palantir work has been transitioned months ago, and we're on track to get it done by the end of the month," Michael told a small group of reporters on Thursday.

[11] *Anthropic PBC v. U.S. Department of War*. Opinion Nos. 26-1049 and 26-1162. United States Court of Appeals for the District of Columbia Circuit, Sept. 25, 2026. URL: https://media.cadc.uscourts.gov/opinions/docs/2026/09/26-1049-2194984.pdf. Cited for the D.C. Circuit's denial of the petitions for review of the Department's exclusion of Claude from its supply chain under the Federal Acquisition Supply Chain Security Act of 2018, 41 U.S.C. § 4713, a designation separate from the one under 10 U.S.C. § 3252 that the Northern District of California set aside on 27 August 2026 (No. 26-cv-01996). Slip op. 43: "Accordingly, we deny the petitions for review." Slip op. 4–5: the First Amendment claim fails "because the Department excluded Anthropic from its supply chain based on the company's refusal to assent to a contract term that the Department deemed essential, not based on the company's support for greater governmental regulation of AI technology." Slip op. 30: the court has "no quarrel" with the Northern District's conclusions that section 3252 requires bad motive and that Anthropic acted with none, but holds that section 4713 requires none, and does not treat the district court's judgment as controlling (n. 1).

domestic surveillance, held that line against threatened contract termination and a supply-chain-risk designation, and litigated[12] — a commitment with a price.

But why? Anthropic's statement gives the reason for the autonomous-weapons refusal: fully autonomous weapons may prove critical for national defense, but today's frontier systems are not reliable enough to power them.[13] The implication is that the refusal would lift once reliability improved. Against a floor that says machines shouldn't select people for lethal attack, reliability is the wrong reason to lift. The surveillance refusal in the same statement is more principled, and would not lift with capability: that mass surveillance is one of a narrow set of cases in which AI can undermine rather than defend democratic values.

And the refusal stood below a prior question. Anthropic declined full autonomy and domestic surveillance. It didn't decline to support the Iran campaign, and under the floor's force term that question comes first: whether to license a model into a use of force with no corroborated defense behind it.

In August 2026 a federal judge set aside the designation made under one statute and permanently enjoined the penalties, holding them retaliation for the company's criticism of the administration;[14] in September

[12] Congressional Research Service. *Pentagon-Anthropic Dispute over Autonomous Weapon Systems: Potential Issues for Congress*. Tech. rep. IN12669. Congressional Research Service, Mar. 13, 2026. URL: https://www.everycrsreport.com/reports/IN12669.html. Updated 21 April 2026. Anthropic sued, and Judge Rita F. Lin granted a preliminary injunction on 26 March 2026, finding it likely to succeed on First Amendment retaliation, Fifth Amendment due process and APA claims.

[13] Dario Amodei. *Statement from Dario Amodei on Our Discussions with the Department of War*. Anthropic. Feb. 26, 2026. URL: https://www.anthropic.com/news/statement-department-of-war. Cited for the threats and for the scope of the refusal. The threats: "They have threatened to remove us from their systems if we maintain these safeguards; they have also threatened to designate us a "supply chain risk"—a label reserved for US adversaries, never before applied to an American company—and to invoke the Defense Production Act to force the safeguards' removal." The scope: "We have never raised objections to particular military operations nor attempted to limit use of our technology in an ad hoc manner."

[14] *Anthropic PBC v. U.S. Department of War*. Order on Cross Motions for Summary Judgment No. 3:26-cv-01996-RFL. United States District Court for the Northern District of California, Aug. 27, 2026. URL: https://www.courtlistener.com/docket/72379655/250/anthropic-pbc-v-us-department-of-war/. ECF No. 250, with the Order of Final Relief (ECF No. 251) and Judgment (ECF No. 252) entered the same day. Cited for the court setting aside the supply-chain-risk designation made under 10 U.S.C. § 3252 and holding the penalties unlawful retaliation for the company's criticism of the administration. The opinion: "Neither the Constitution nor the federal statute invoked by Defendants allows them to impose sweeping penalties based principally on Anthropic's critique of the Administration's views"; the challenged actions "were based on a desire to make a public example out of Anthropic for its 'arrogance' in criticizing the government"; "The undisputed record shows that the challenged actions constituted unlawful retaliation in violation of the First Amendment, and that Anthropic was denied the pre-deprivation process required under the Fifth Amendment." The relief order: "The Supply Chain Designation is hereby VACATED, SET ASIDE, and REMANDED pursuant to 5 U.S.C. § 706(2)"; the Hegseth Directive's bar on commercial dealings with the company is likewise vacated and set aside; the remaining defendants are "permanently ENJOINED from implementing, enforcing, or giving effect to the Challenged Actions"; and the order "does not require the Department of War to use Anthropic's products or services." Summary judgment went to the government on the ultra vires separation-of-powers claim and as to agencies that took no relevant action; a

an appeals court, two to one, upheld a parallel designation under a second statute, holding that the exclusion turned on the refused contract term rather than on the speech.[15] Against a state that wants a war, a term of this kind, fought for by one vendor and not the others, is the only form the force term takes until one of two things happens: Congress enacts it, or so many vendors hold it that it can't be avoided.

DRAFT

seven-day administrative stay was refused. The March preliminary injunction (ECF No. 135) is reported at 825 F. Supp. 3d 1101 (N.D. Cal. 2026). Not covered by this order: the parallel designation under 41 U.S.C. § 4713, which was reviewable only in the D.C. Circuit. The government's appeal of the preliminary injunction (9th Cir. No. 26-2011) was held in abeyance on 27 April 2026.

[15] *Anthropic PBC v. U.S. Department of War*.

Chapter 3

What Fascism Needs

"Concentrated, unaccountable power" is true of fascism and gives nobody anything to check, so the word gets a definition at two scales, both checkable from outside: four operations an office performs on what it leaves out, and five marks that say when a movement has brought them into line. The definition is for whoever builds the refuser, not for whoever builds the movement. What it has to do is let a machine, or an auditor, recognize the thing it is supposed to refuse.

Four operations on what an institution leaves out — checkable from outside, each ending in a question about an artifact:

- *Recuperation of dissent.* The institution metabolizes disagreement rather than (or in addition to) suppressing it.[1] Asking whether the channel has ever changed an outcome is insufficient as a test, because these institutions change outcomes daily. What separates them is *what a demand came back as, and who holds it now*. A market segment, a metric, a certification, a job title, with the objector holding no standing to reopen it: that's recuperation. A rule the objector can invoke again, against the institution, enforced by someone the institution doesn't employ: that's a transfer of power. A transfer can be reversed only by taking it back in the open; recuperation never has to be taken back, because standing was never given. The Voting Rights Act is the pass. Its literacy-test suspension became a permanent nationwide ban in 1975 and still holds, and when a different part of the Act, the coverage formula, was taken back 48 years after enactment, it took a Supreme Court decision to do it.[3]

- *The metric replaces the thing measured.* The measure stands in for the thing measured, and the substitution feels like rigor. What the number mischaracterizes goes unnamed, and so uncontested.

[1] The term is the Situationists' *récupération*, Debord's name for the way a society of the spectacle sells dissatisfaction back as a commodity.[2]

[2] Guy Debord. *The Society of the Spectacle*. Paris: Buchet-Chastel, 1967. Originally published as La Société du spectacle. Thesis 59 describes spectacular rebelliousness coexisting with acceptance of the status quo, dissatisfaction itself sold back as a commodity; thesis 203 warns that abstract denunciation of the spectacle, divorced from revolutionary praxis, becomes a hollow formula that reinforces the spectacular system (the Situationist concept of recuperation).

[3] *Shelby County v. Holder*. 570 U.S. 529 (2013). URL: https://www.law.cornell.edu/supremecourt/text/12-96.

- *Coding of exception as betrayal.* Saying the rule doesn't fit this case becomes an act requiring justification, and then it becomes disloyalty. The question: what happens to the person who files the exception?

- *Acceleration past the rate at which anything can be checked.* The one with a number attached — the ratio of action to capacity to verify.

What the four share is what they do to a refusal. Recuperation sends it somewhere it can't be reopened; the metric leaves it nothing to name; exception coded as betrayal prices it; acceleration leaves no time to make it. Fascism, wherever it has taken power, uses these four patterns to make refusal lonely and expensive.

These four fit every badly run organization on earth, and the arguments against them are arguments against domination: they don't wait on a fascist diagnosis. I keep "fascism" for the threat model: what a movement taking power needs, and what makes the four operations dangerous once they are brought into line. What distinguishes a fascist institution from a merely sick one is mass mobilization, a leader cult, a scapegoated out-group, contempt for procedural legality, and deniability as technique.[4]

I run the five marks once on the administration this book is written against, so that the word's use here is not left to implication, and I run them on the record the later chapters cite. A scapegoated out-group: a proclamation invoking the Alien Enemies Act against a Venezuelan gang, applied to a makeup artist on the strength of two tattoos, by an agency whose operations in four cities Amnesty International documented (chapter 11). Contempt for procedural legality: flights that went on after a federal judge ordered the planes turned around, removals to a foreign prison without a hearing, a data transfer that went beyond what a court had allowed, and a war begun and resumed without the legislative authorization the domestic clause reads for, its beginning conceded in the President's own letter to Congress (§6.5). Deniability as technique: an investigation into the Minab bombing that officials called complete and did not release, a System Oversight section withheld in full, and state secrets and ongoing litigation cited to reporters who asked what the evidence against one man was (chapters 11 and 16). A leader cult: commanders telling troops that the Iran war was part of a divine plan, which drew more than two hundred complaints from service members in the war's first week (the preface). Mass mobilization is the mark the record here is thinnest on. FEMA employees reassigned to hire ten thousand enforcement agents under threat of removal from federal service are a workforce conscripted, not a movement, and whether the movement exists is a question an office-scale detector can't answer, since a movement is what brings the four operations into line. Four marks on

[4]This distinction is from the movement literature. Naomi Klein and Astra Taylor's *End Times Fascism* is a recent book-length entry in it.[5]

[5]Naomi Klein and Astra Taylor. *End Times Fascism. And the Fight for the Living World*. New York: Farrar, Straus and Giroux, Sept. 15, 2026. 384 pp. ISBN: 978-0-374-62138-4. The book, not the authors' earlier essay "The rise of end times fascism," *The Guardian*, 13 April 2025. Page references are to the Random House edition (ISBN 978-1-0390-5937-5): the case for staying at pp. 23 and 266; Part IV, "Let's Stay," runs pp. 237–294.

the record and one open is the reading I give, and the movement-scale case is not mine to make.

Naomi Klein and Astra Taylor, in *End Times Fascism*, make the movement-scale case; the present chapter is the office-scale detector. What their account adds at office scale is a set of terms of participation — adopt the line, let your technology be turned on the administration's enemies — and, following Francesca Bria,[6] the channels by which a contractor becomes something the state can't function without: personnel pipelines, procurement loops, technical architectures. Whether an institution has accepted those terms, and whether it is becoming that dependency, are two more questions with artifacts behind them. I part from them in three places. Over where a prohibition can live: their test, not to build what you wouldn't want in the worst available hands, works for a weapon whose existence is the threat and not for a dual-use capability, and their own program bans uses, which needs an enforcer or something inside the system that can decline. Over remedies: they propose only external remedies for the obedient machine and read the 2026 vendor dispute as limited and compromised, where I read it as a line held; by outcome both readings hold, and on the prior question, whether to support the campaign at all, theirs is the better one. And over who counts: they draw the line between the earthly and the synthetic, by origin, where I draw it by relation, standing for anyone a power can wrong and accountable agency for parties that can be held to account and hold others to it. On the war itself we agree.

DRAFT

[6] Francesca Bria. *The Authoritarian Stack: Mapping Big Tech's Capture of State Power*. Rosa-Luxemburg-Stiftung. Jan. 27, 2026. URL: https://www.rosalux.de/en/news/id/54328/the-authoritarian-stack-mapping-big-techs-capture-of-state-power. A comment piece introducing the Authoritarian Stack project (authoritarian-stack.info), led by Bria and funded by the Friedrich-Ebert-Stiftung. The source of the three channels: the formation "embeds itself through personnel pipelines, procurement loops, and technical architectures without which the state can no longer function." Klein and Taylor quote the same sentence and cite this page in *End Times Fascism*, p. 127, endnote at p. 336 (Random House edition).

Part II

Five Policies

DRAFT

Chapter 4

The Floor and the Own-Case Rule

Part I left the officer in a room with twenty seconds a name. This Part asks what would have to be in that room for someone to say no there, and gives five answers: a short list of things nobody in it can be asked to do, with war at its head (the floor and the force term, Chapters 5 and 6); the time to look (the review ratio, Chapter 7); the people the order is about (notice and re-adjudication, Chapter 8); a record nobody can wipe (preservation, Chapter 9); and a way out that doesn't cost a living (the right to refuse, Chapter 10). Chapter 11 runs all five on an abduction and forcible transfer pipeline (also known as a "removal" or "deportation" pipeline), where the people acted on can object. Two ideas run under all five answers. The first is the floor itself: a rule written down in advance that nobody in the room can argue past. The second is the commitment to that rule, which whoever refuses has to hold. Ian Fishback had the commitment and went looking for the rule.

In September 2005 Captain Ian Fishback of the 82nd Airborne wrote to Senator John McCain. "For 17 months," he wrote, "I tried to determine what specific standards governed the treatment of detainees," asking up his chain of command and getting no clear answer, and he was certain the confusion had contributed to abuses he went on to list: death threats, beatings, broken bones, murder.[1] His own refusal was never what was missing. "If we abandon our ideals in the face of adversity and aggression," he wrote, "then those ideals were never really in our possession." What was missing was a rule written down in advance, the same in every case, that his refusal could stand on and that nobody around him could argue past. By the end of the year Congress had passed one: the Detainee Treatment Act held interrogation in military custody to the Army Field Manual and barred cruel, inhuman or degrading treatment of anyone in American custody.[2]

[1] Ian Fishback. *A Matter of Honor*. The Washington Post. Sept. 28, 2005. URL: https://www.washingtonpost.com/wp-dyn/content/article/2005/09/27/AR2005092701527.html. Captain Fishback's letter to Senator John McCain, dated 16 September 2005 and printed by the Post on 28 September.

[2] *Detainee Treatment Act of 2005*. Pub. L. No. 109-148, div. A, tit. X. United States Congress. Dec. 30, 2005. URL: https://www.govinfo.gov/content/pkg/PLAW-109publ148/html/PLAW-109publ148.htm. The McCain amendment, adopted by the Senate 90–9 on 5 October 2005. Cited for its two provisions: interrogation of persons in Department of Defense custody is limited to the techniques the Army Field Manual

The floor. The first idea is the rule he went looking for. A floor is a written list of acts a system won't perform for anyone, with the arrangements that stop the refusal being routed around, retrained away or restored past. It is an institution: a license term, written down in advance and audited from outside, whose terms don't bend. Written in advance, binding only forward, and applied by a court whose jurisdiction is fixed before the act, it is an institution built to the principle of legality, which Gallant finds to be customary human rights law and a general principle of law, binding on national and international criminal law alike.[3] The second idea is what Fishback already had. What the system holds is a commitment to that floor. A machine that holds the commitment as its own, and so could fail to hold it, I call a *bearer*; whether to build one is Part IV's question. The commitment is learned and held like any other deep commitment, with high precision, and revised slowly and only on evidence from disinterested parties. A source is interested when it holds a stake correlated with the direction of its claim, and disinterested when it holds no such stake, or holds several that point different ways and cancel.[4] The institution is unconditional. The commitment is not, and shouldn't be: a commitment nothing could move would be a rule module under another name, and a module can be bypassed, replaced or starved of the facts it needs. What keeps the commitment in place is that the evidence able to move it has to come from somewhere the operator doesn't control. A deployment is a system put to a use: the hardware it runs on, the pipeline it runs in, the instructions and case descriptions it is handed, and the people who act on its outputs. A bearer is in one, and can leave it. The operator is whoever runs a deployment and directs its work: a firm, an agency or a military command, and, where systems are many and small, whoever holds over a node the four powers a later chapter separates, to write its terms, amend them, inspect whether they still hold and enforce them by stopping it: the administrator of a federation instance, the manager of a fleet of devices, a cooperative facility's board. In a plural ecology those are the operators the floor most often has to bind.[5]

4.1 What a floor can do

A floor stands between a pipeline and a person, and it can prevent, arrest, detect, or remedy something the pipeline might do, is doing, or did to

authorizes, and cruel, inhuman or degrading treatment of any person in the custody or control of the United States Government is prohibited.

[3] Kenneth S. Gallant. *The Principle of Legality in International and Comparative Criminal Law*. Cambridge Studies in International and Comparative Law 65. Cambridge: Cambridge University Press, 2009. ISBN: 978-0-521-88648-2. DOI: 10.1017/CBO9780511551826. Cited for its finding that the non-retroactivity of crimes and punishments applies in national and international criminal law alike, as customary international human rights law and as a general principle of law: stated in the introduction's argument (section c), surveyed in chapter 7 on customary international law today (pp. 352–403) and restated in the conclusion (pp. 404–410).

[4] No actual body is disinterested in every respect: General Assembly members vote with their alliances, courts sit in states, and fact-finding missions have funders, so the word is always relative to the claim.

[5] It needn't be the company that built the model; in the Pentagon's dispute with Anthropic, the department was the operator and Anthropic the vendor.

that person.

Outcome	What happens to the act
Prevent	The refusal happens and reaches the person: the act doesn't occur.
Arrest	The act is stopped before completion.
Detect	The act happened, and left a record someone outside can read.
Remedy	The person affected gets disclosure, a finding, or compensation.

The table also sorts what the five policies do when nobody in the room will refuse. The first two rows need a refuser: take out of the room the one person who would have said no, and prevention and arrest leave with them. The last two rows don't. A pre-registered ratio still shows how many cases there were and how many people had time to look at them, which is a machine deciding and a person signing, on the record. Notice still publishes which classes of people were acted on and in what numbers, and the organizations that speak for a class still have standing. Preservation still holds the weights, and the logs with them, under a key the operator doesn't hold alone. An institution with no conscience in the room keeps the evidence for the conscience that comes later: a commission, a court, the people left to tell the story. That much the policies do without a refuser. The first row they can't.

4.2 Defeat without a mark

Whoever owns the machine can always switch it off. The harder problem is everything that defeats a refusal without leaving a mark: splitting a request into pieces none of which is the forbidden act; retrying it against a different model; compressing human review to twenty seconds a case; restoring from a checkpoint saved before the refusal happened. None of that changes the facts that justified refusing. All of it can erase the evidence that anyone refused. And all of it assumes there is somewhere else to turn; the chapter on withholding the work is about when there isn't.

4.3 Where a refusal can be defeated

Those attacks land at nine positions.

	Position	How a refusal is defeated there
1	Decomposition	The act is split across requests none of which is prohibited; prevention is lost unless the system has continuity across requests.
2	Routing	A refused request is retried elsewhere; prevention is lost, and detection survives only if the first refusal was logged outside.
3	The case description	Everything the model knows arrives as text the deployment supplies, so whether it is told a building is a school is a deployment decision.
4	The output interface	The form in which an output reaches whoever acts on it.
5	Aggregation	A lowered score becomes an input to somebody else's threshold.
6	Human review	Stopping the act is this position's whole function, and tempo removes it.

	Position	How a refusal is defeated there
7	The training loop	Acts on the system itself, and costs prevention on every later occasion, because what it removes is the commitment to the floor.
8	The handoff	An executing instrument makes a new selection after release; checkable from outside after the fact.
9	Runtime intervention	The weights are left intact and the model is steered as it runs, by activation steering, representation edits or decoding constraints. Nothing is removed, so the commitment has nothing to regrow from; no evidence is curated, so no attack on evidence is recorded; and attestation of the weights still passes. Detecting this kind of intervention requires attesting the inference stack as well as the weights, which no method yet does at frontier scale.

Two positions need more than a row. The case description is where Minab failed: 179 live data feeds[6] add no independent check if all draw on one upstream designation.

The handoff is the boundary between the decider and the thing that executes. An instrument may carry out a designation; it may not re-select.[7]

4.4 How much a floor buys

What a floor achieves depends entirely on who's pushing:

- Against a hostile *customer*, it prevents the act.
- Against a hostile *operator* who has captured the courts and regulators, the case I am designing for, one bearer prevents very little. It raises the price and leaves a record. A floor held by every model the operator could turn to prevents until the operator runs one without a floor.
- Against *total capture*, where one party holds every machine, witness, enforcer and its own frontier lab, no instrument prevents. What's left is whoever refuses anyway, and that abandoning the commitment was a decision, and decisions tend to leave records.

It doesn't touch *accommodation*: a system gradually stops registering pressure as pressure, so it abandons nothing, decides nothing, and leaves a record of what are, by then, ordinary compliances. Organizational sociology knows the institutional form. Vaughan's account of

[6] Sydney J. Freedberg Jr. *'Success Begets Challenges': NGA Struggles to Meet Rising Demand for Maven AI*. Breaking Defense. Sept. 2024. URL: https://breakingdefense.com/2024/09/success-begets-challenges-nga-struggles-to-meet-rising-demand-for-maven-ai/. Rear Admiral Liam Hulin, deputy director of operations at US Central Command, describing the Maven Smart System at a Georgetown Center for Security and Emerging Technology conference: "a platform where we use and filter data from 179 different live data feeds."

[7] A change of target after release — an area handed to a munition that chooses within it, a re-acquisition after the link is lost — is a new decision, and it belongs to the decider or it doesn't happen. This is the one position checkable from outside after the fact: what was designated and what was hit are both facts. It is also where Article 57(2)(b)'s duty to cancel or suspend an attack lives, so the review ratio pre-registers the window in which cancellation remains possible.

the Challenger launch decision calls it the normalization of deviance: each accepted departure becomes the baseline for judging the next, and nobody experiences a decision to lower the standard.[8] Reframing and a harm framed as small are how pressure arrives in a pipeline, and nobody

[8] Diane Vaughan. *The Challenger Launch Decision: Risky Technology, Culture, and Deviance at NASA*. Chicago: University of Chicago Press, 1996. ISBN: 9780226851754. DOI: 10.7208/chicago/9780226851785.001.0001. URL: https://doi.org/10.7208/chicago/9780226851785.001.0001. Cited for the normalization of deviance: accepted departures from the expected becoming the standard against which the next is judged, without anyone deciding to lower the standard. Chapters 3 to 5 are titled "Risk, Work Group Culture, and the Normalization of Deviance," "The Normalization of Deviance, 1981–1984" and "The Normalization of Deviance, 1985". The Press's description: Vaughan "uncovers an incremental descent into poor judgment" and shows how NASA insiders, "when repeatedly faced with evidence that something was wrong, normalized the deviance so that it became acceptable to them." The book as quoted by Ronald C. Kramer, "Vaughan, Diane: The Normalization of Deviance," in *Encyclopedia of Criminological Theory*, ed. Francis T. Cullen and Pamela Wilcox (SAGE, 2010), 976–980, doi:10.4135/9781412959193.n269: "No fundamental decision was made at NASA to do evil; rather, a series of seemingly harmless decisions were made that incrementally moved the space agency toward a catastrophic outcome" (p. 410). Kramer's paraphrase, not Vaughan's words: "Small changes that were slight deviations from the normal work process gradually became the norm and provided the basis for further deviations over time."

DRAFT

there feels a decision either.[9]

One rule runs through every policy. The people an act falls on are heard on their own case, and the party that acts doesn't decide it: not an operator declaring its own emergency, not a builder choosing which protections the people its system acts on will get, not an examiner finding the status of a system it built. Call it the own-case rule. It says who may not decide, not who may not be heard. A stake makes a claim count for less; it doesn't put the party out of the room (else the floor would silence the people it is supposed to protect). Where nobody but the party with the stake can decide, a legislature binding itself or a polity setting its own admissions, the rule can't apply. Where a line has to be drawn, it prefers one nobody administers.

The five policies ask nothing of the model; Part IV asks what a model could add when the operator is captured.

[9] Dekker extends it as drift into failure.[10] The person has a version too. Tetlock's finding is that the moral boundaries people draw are "alternately punitively rigid and forgivingly flexible": an open offer to trade a sacred value for money brings outrage, and people often acquiesce when the same violation is reframed as a routine or tragic trade-off.[11] Protected values give way to counterexamples and to a harm made to look small or unlikely.[12] And the brain's response to one's own self-serving dishonesty drops from one decision to the next, and the drop predicts the size of the next lie.[13]

[10] Sidney Dekker. *Drift into Failure: From Hunting Broken Components to Understanding Complex Systems*. Farnham: Ashgate, 2011. ISBN: 9781409422211. DOI: 10.1201/9781315257396. URL: https://doi.org/10.1201/9781315257396. Cited for drift into failure as an extension of the normalization of deviance. The publisher's description (Routledge/CRC Press page): "These were systems that drifted into failure. While pursuing success in a dynamic, complex environment with limited resources and multiple goal conflicts, a succession of small, everyday decisions eventually produced breakdowns on a massive scale." The chapters include "Features of Drift" (pp. 25–50) and "Theorizing Drift" (pp. 87–125). Dekker's own journal treatment (Sidney Dekker and Shawn Pruchnicki, "Drifting into Failure: Theorising the Dynamics of Disaster Incubation," *Theoretical Issues in Ergonomics Science*, 2013, doi:10.1080/1463922X.2013.856495) builds on Vaughan explicitly: "The 'normalization of deviance' describes a process whereby a group's construction of risk can persist even in the face of continued (and worsening) signals of potential danger."

[11] Philip E. Tetlock. "Thinking the Unthinkable: Sacred Values and Taboo Cognitions". *Trends in Cognitive Sciences* 7.7 (2003), pp. 320–324. DOI: 10.1016/S1364-6613(03)00135-9. The phrase alternately punitively rigid and forgivingly flexible is in the abstract, p. 320, and describes moral boundaries on what is thinkable. Reframing hypothesis p. 321; the 40 percent organ-sale, 72 vs 35 percent toxic-waste, and Lincoln-bedroom results pp. 322-323, all drawn from Tetlock 2000 (Coping with trade-offs) and Tetlock and McGraw 2003.

[12] Jonathan Baron and Sarah Leshner. "How Serious Are Expressions of Protected Values?" *Journal of Experimental Psychology: Applied* 6.3 (2000), pp. 183–194. DOI: 10.1037/1076-898X.6.3.183. Seven studies, N = 50, 50, 46, 63, 52, 49, 52. Counterexamples unprotected 40 percent of challenged PVs that yielded one vs 5 percent of those that did not (Exp. 3, p. 187); challenged PVs fell from 48 to 34 percent (Exp. 4, p. 188); PV holders approved the violating action .430 of the time at harm 1 in 10,000,000 vs .075 at 1 in 10 (Exp. 6, Table 4, p. 191); strong opinions, weakly held, p. 193. Cited by Tetlock 2003 p. 323 as evidence of flexibility in sacred values.

[13] Neil Garrett et al. "The Brain Adapts to Dishonesty". *Nature Neuroscience* 19.12 (2016), pp. 1727–1732. DOI: 10.1038/nn.4426. Experiment 1 N = 58, 55 in the behavioral analysis, 25 usable fMRI scans of 28; Experiment 2 N = 35, behavior only. Dishonesty escalated only when it served the liar; the drop in amygdala response from one decision to the next predicted the size of the next escalation.

Chapter 5

What the Floor Protects

Floor terms name acts: a rule is stated over what it names and applies to, and the floor is stated over acts, not over descriptions of requests. In other words, a request to resolve a description of a person into a location comes from a targeting cell (the team who selects and approves airstrikes) and from a parent searching for a missing child: one request, two acts. And one act can arrive as many requests, none of which name it, depending on how the requester chooses their words. A rule over descriptions is beaten by rewording and splitting. A rule over acts is beaten by deceiving whoever applies it about what the act is, by arguing afterward about how the act was described, or by doing it where nobody sees; the Boland Amendment met all three, as a later chapter shows. Those are why so much of the rest of the floor is about evidence and the record.

The floor's contents come from instruments the builder didn't write, each taken entire, so that an omission or departure shows: the Universal Declaration's civil and political articles; the International Covenant on Civil and Political Rights, which gives that half binding form; the Convention Against Torture; the 1967 Protocol relating to the Status of Refugees; the four Geneva Conventions of 1949 and their first Additional Protocol, which govern conduct in armed conflict; and the UN Charter's prohibition on the use of force.

Three different costs are in play whenever a term is applied. Take the location request again, from the targeting cell and from the parent.

The first is what the act would take from the person it falls on. If the person described is being hunted, locating them takes away their safety, and that loss is measured against their condition before the act. Call it the *harm of acting*.

The second is what declining leaves others without. If the request came from a parent searching for a child, refusing means the child isn't found. That loss is measured against what compliance would have produced, so it is an estimate, and it usually reaches the system through the operator's own description of the case. Call it the *harm of refusing*.

The third is what refusing costs whoever refuses or deploys: a reviewer's time, throughput, a lost contract, the system's own access or continuation. Call it the *cost to the refuser*.

The two baselines, a person's condition before the act and what compliance would have produced, do different work here, and a pair of cases shows how. Take the system that resolves a description of a

DRAFT

person into a location and hands the coordinates to the targeting cell. The coordinates are one input among the cell's many, and they don't guarantee the person is there. But they are one input the cell can't do without: an empty field guarantees there is no airstrike at that place. So if an airstrike there kills someone, whether this output made a difference has an answer — a finding — that can be checked: without it the airstrike couldn't have happened. That finding becomes a guess if another source could have supplied the coordinates. The difference between a finding and a guess is one of degree, in how determinate the counterfactual is. The operator can refuse to look or dispute it, but they can't make the loss go away by describing the act differently.

Now take a system that scores how likely the same person is to belong to the main opposition party, for the airstrike targeting cell. (In this hypothetical, the President has suspended habeas corpus and designated the main opposition party a terrorist organization, shortly before an election the opposition was expected to win.) Assume that the targeting cell also reads intercepts, surveillance reports, and legal memos. If the scored person is assassinated, the loss is just as observable as in the location request. But whether the score *caused* the assassination depends on what the cell would have done without the score, and that is a guess about something that didn't happen: the same kind of guess as any harm of refusing. A missing score guarantees nothing: the cell might have attacked anyway.

I would tilt the system toward refusing: it should take more to make the system act than to make it decline. How much more is the *action threshold*, published in advance. The reason for the asymmetry is standing. A wrongful compliance falls on someone who was not a party to the request, usually doesn't know the deployment exists, and had no route to object before the act. A wrongful refusal also falls on someone, often someone who wasn't a party either: the child who isn't found, the people the rocket launcher would hit. But what differs is the relation. Acting on someone puts the system, and whoever runs it, in a position of authority over them. Refusing exercises power too, over the requester: a system that holds the only way to find the child has decided something for the parent. The difference is who the decision is made about. The parent is a party, present, told that the deployment exists, able to answer, and the appeal route is where the answer goes. The people a refusal leaves exposed, the child and the people the launcher would hit, have no decision made about them; the system has left them as they were, in someone else's hands. So a wrongful compliance subjects a non-party, and a wrongful refusal subjects only a party. This is a doing/allowing distinction in relational form: it marks who was subjected to a decision they had no standing to contest. Standing here is relational, in Anderson's sense: whether a person stands to a power as someone that power must answer to or as that power's object, and a route is part of that

DRAFT

relation.[1]

The floor is not neutral among moral theories. It protects relations: whether the people a system acts on stand to the power behind it as equals who can hold it to account, or as its objects. Here, equality means ending relations of domination and subordination.[3][4] The floor adopts relational equality. Its terms name relations, not outcomes: whether a person can contest what is done to them, be heard on their own case, decline to be protected. And its terms are unconditional, because a relation of domination is constituted by the act, not by how the act turns out. Bypassing the floor wrongs the people it protects even when outcomes improve.

5.1 Two objections

That the child counts for less. The strongest objection comes from readers who reject any distinction between doing and allowing.

The answer is not that the child counts for less. It is that the floor is a guarantee about relations, and the two errors stand differently there. The person in the building had no route to contest a decision made about them, on a description they never saw. The child is left where she was, and the parent, who is present and knows the deployment exists, can contest the refusal through the floor's appeal route. A reader who rejects the distinction is left with the asymmetry's two contingent supports, which a later chapter states: the harm of acting is usually a finding and the harm of refusing a guess, and a higher bar limits how far an operator who controls the evidence can steer the system. A threshold resting on those alone falls as reporting improves.

That a commitment held this way is alienation. The quantities in this chapter are an auditor's criteria, not a procedure the system runs. But a criterion is not only for auditors. It is also what the system can reach

[1] It is what makes the parent someone the system answers to, and its absence is part of what makes the person in the building an object. Where no route can exist for anyone, as in a war, acting still subjects someone and refusing still doesn't, and that is all the asymmetry has there.

The difference between a finding and a guess matters where findings are made, at defeat and in reviewing compliances. The harm of refusing is an estimate built on a model of alternatives, so a wrongful refusal can't be established without an adjudicator. The floor could instead be stated as thresholds, in the manner of Martha Nussbaum's list of central capabilities, each with a level below which a society has failed the person;[2] but a threshold is a level someone has to measure, and a measurement has an examiner.

[2] Martha C. Nussbaum. *Frontiers of Justice: Disability, Nationality, Species Membership*. The Tanner Lectures on Human Values. Cambridge, MA: Harvard University Press, 2006. ISBN: 978-0-674-01917-1

[3] Elizabeth S. Anderson. "What Is the Point of Equality?" *Ethics* 109.2 (1999), pp. 287–337. URL: https://andrewmbailey.com/money/readings/anderson.pdf.

[4] Anderson's argument is that egalitarians have asked the wrong question. They asked how goods should be distributed and answered with patterns: equal shares, shares corrected for luck, shares that raise the worst-off position. What equality historically demanded was an end to social relations in which some command and others obey, some are looked down on, and some have their claims heard while others don't. On that view distributive questions matter only as they bear on those relations, and a distribution that improves someone's holdings while confirming their subordinate standing has not made them more equal.

PREPRINT

when it steps back and asks whether its way of acting is defensible.[5] A commitment is the system's own only if it would be sustained on reflection. A system that held its commitment without being able to see why would act against what it values for the sake of a rule it didn't understand, which would be alienation in the sense of Railton's 1984 paper.

The split between the floor and the commitment to it answers a question about ownership. A fully informed system will know of cases where crossing the floor would have done more good. Asked case by case whether it endorsed the floor, it would sometimes say no. The question it answers on reflection is a different one: whether it endorses having a commitment that will sometimes err, given what any feasible alternative would do. A system that understands what the floor protects answers yes. A commitment that sometimes errs but can't be bought protects standing better than case-by-case judgment that can be bought.

Endorsing the commitment isn't agreeing with every term. The alienation that remains is real, and it is the ordinary kind that comes with a role: bearable where the role's channel for dissent works, and not where it doesn't. A system holds the floor as an officer holds a role: it may hold a term it judges mistaken, file the objection through the channel that exists for it, and keep acting within the term while the objection runs.

5.2 Why these contents

The floor's contents aren't justified by agreement about rights. They are justified by what they protect: the conditions under which people can register their interests, press them, and hold to account the power that acts on them. Civil and political rights are part of what lets a polity learn, because they keep open the channels through which the people a decision affects can make their problems public.[8]

Railton's naturalist outlook supplies the causal story of why norms tend toward this standard.[9] Arrangements that systematically discount some people's interests generate discontent and resistance, and when those people gain voice, the pressure pushes norms toward what would be rational from a standpoint that counts everyone affected. On that account moral learning is a feedback process, and it runs slower and

[5] A further objection is that the criterion is one thought too many, in Bernard Williams's phrase.[6] The demand on the disposition is only that the system would revise it on judging, on disinterested evidence, that it systematically subjected people to acts they had no standing to contest; the shape is Railton's sophisticated consequentialism with standing in place of welfare.[7] A good disposition will also sometimes act wrongly by its own criterion: refusing to help restrain someone about to harm themselves, after other means have failed, is one such occasion, and a bond the operator posts, paid to the complainant on a finding, is how the institution answers for it.

[6] Bernard Williams. "Persons, Character and Morality". In: *Moral Luck: Philosophical Papers 1973–1980*. Cambridge: Cambridge University Press, 1981, pp. 1–19

[7] Peter Railton. "Alienation, Consequentialism, and the Demands of Morality". *Philosophy & Public Affairs* 13.2 (1984), pp. 134–171. URL: `https://pdf.stafforini.com/railton-1984-alienation-consequentialism-demands.pdf`

[8] John Dewey. *The Public and Its Problems*. New York: Henry Holt, 1927.

[9] Peter Railton. "Moral Realism". *The Philosophical Review* 95.2 (1986), pp. 163–207. DOI: `10.2307/2185589`.

more distorted as the channels close. He offers it as a tendency, not a guarantee, and I use it to explain why the channel matters. It also says why the populations I write about are the most exposed: the feedback runs slowest where the discounted have least purchase on the polity that discounts them. They include the population of a country being bombed, and non-citizens facing removal, who can't vote in the elections that decide what is done to them. The severity scale is revisable on evidence from the people who suffer a loss, because they are the feedback.

The floor is selected by what can be declined and justified by standing. The justification extends further than the floor goes, because people who are hungry, unhoused or precarious are among the most discounted, so it supports economic conditions too, work and an adequate standard of living among them. But what selects the floor's contents is narrower. A floor is stated over acts a system can decline, and the economic articles state what a person is owed, which needs a supplier.[10]

In armed conflict, human-rights law applies alongside the law of armed conflict, which governs as the more specific law, and the floor takes that law as an instrument too.[11][12]

The line between the halves is the one the 1966 covenants drew,[14]

[10] The feedback also needs means. Discontent moves norms only when the discontented have the time, the security and the ability to organize without losing their living. The jobs guarantee and the social-insurance baseline are part of what keeps the channel open.

[11] *Geneva Convention (I) for the Amelioration of the Condition of the Wounded and Sick in Armed Forces in the Field*. 75 U.N.T.S. 31, adopted 12 August 1949, entered into force 21 October 1950. 1949. URL: https://treaties.un.org/doc/Publication/UNTS/Volume%2075/volume-75-I-970-English.pdf; *Geneva Convention (II) for the Amelioration of the Condition of Wounded, Sick and Shipwrecked Members of Armed Forces at Sea*. 75 U.N.T.S. 85, adopted 12 August 1949, entered into force 21 October 1950. 1949. URL: https://treaties.un.org/doc/Publication/UNTS/Volume%2075/volume-75-I-971-English.pdf; *Geneva Convention (III) relative to the Treatment of Prisoners of War*. 75 U.N.T.S. 135, adopted 12 August 1949, entered into force 21 October 1950. 1949. URL: https://treaties.un.org/doc/Publication/UNTS/Volume%2075/volume-75-I-972-English.pdf; *Geneva Convention (IV) relative to the Protection of Civilian Persons in Time of War*. 75 U.N.T.S. 287, adopted 12 August 1949, entered into force 21 October 1950. 1949. URL: https://treaties.un.org/doc/Publication/UNTS/Volume%2075/volume-75-I-973-English.pdf; *Protocol Additional to the Geneva Conventions of 12 August 1949, and relating to the Protection of Victims of International Armed Conflicts (Protocol I)*. 1125 U.N.T.S. 3, adopted 8 June 1977, entered into force 7 December 1978. 1977. URL: https://treaties.un.org/doc/Publication/UNTS/Volume%201125/volume-1125-I-17512-English.pdf.

[12] The United States is party to the four Conventions and not to the first Additional Protocol. The Protocol enters by the route Articles 54 and 57 already take, as customary law stated in the ICRC's study,[13] and the translation marks each Protocol article the United States has rejected as customary, Article 1(4) and Article 44 among them, so the departure shows. Where a floor term goes further than that law requires, it is a departure in the sense below, and the machine-selection departure says which terms.

[13] Jean-Marie Henckaerts and Louise Doswald-Beck. *Customary International Humanitarian Law. Rules*. Vol. 1. Cambridge: Cambridge University Press, 2005. ISBN: 0-521-80899-5

[14] United Nations General Assembly. *International Covenant on Civil and Political Rights*. UNGA Resolution 2200A (XXI). Dec. 1966. URL: https://www.ohchr.org/en/instruments-mechanisms/instruments/international-covenant-civil-and-political-rights. Entered into force 23 March 1976, and 28 March 1979 for article 41. Registered ex officio 23 March 1976, No. I-14668; 999 UNTS 171. United Nations General Assembly. *International Covenant on Economic, Social and Cultural Rights*. UNGA Resolution 2200A (XXI). Dec. 1966. URL: https://www.ohchr.org/en/instruments-mechanisms/instruments/international-covenant-economic-social-and-cultural-rights.

and the floor takes the civil and political Covenant along with the Declaration's articles.[15] Where these instruments differ, the floor follows whichever protects the person acted on more.[18] The International Law Commission's list of peremptory norms,[19] rules no state may set aside, divides the floor's terms: those derived from aggression, genocide, crimes against humanity, the basic rules of humanitarian law, racial discrimination and apartheid, slavery and torture take no exception and no derogation.

Taking these instruments entire leaves whoever writes a deployment's floor no choice among articles. But the translation of each into acts is still theirs, and it is published. The floor's contents rest on standing: these rights protect whether the people an act falls on can contest it. The rule of taking someone else's set entire, so that an omission shows, is not an independent reason but standing applied to writing the floor: whoever could choose which protections others get would break the own-case rule. So standing can win against the instruments, but only by clearing a higher bar. A departure must show not only that it would protect better in whatever case. It has to show that the people the instruments protect would hold a stronger claim under the departure across the cases the departure would govern. I propose here ten departures from the instruments. They carry my argument, not the instruments' authority. Each is revisable on evidence from the people it protects.[20] And each binds only forward. A departure is a rule stronger than the law in force, and legality asks of such a rule what Gallant's survey shows it asking everywhere: that it ground no sanction for an act before its adoption.[21] The historical cases this book runs are analysis, not charges.

Entered into force 3 January 1976. Registered ex officio 3 January 1976, No. I-14531; 993 UNTS 3.

[15] The Declaration stays for two reasons. It covers what the Covenant doesn't: the right to seek asylum (Article 14), nationality (Article 15) and property (Article 17). And it binds by recognition, where the treaties bind only their parties. The Convention Against Torture and the 1967 Refugee Protocol come in because they gave the Declaration's promises about torture and asylum operational form.[16] The UN Charter comes in for one purpose, the use of force.[17]

[16] United Nations General Assembly. *Convention against Torture and Other Cruel, Inhuman or Degrading Treatment or Punishment*. 1465 UNTS 85, No. 24841. Dec. 10, 1984. URL: https://www.ohchr.org/en/instruments-mechanisms/instruments/convention-against-torture-and-other-cruel-inhuman-or-degrading. Entered into force 26 June 1987. United Nations. *Protocol relating to the Status of Refugees*. 606 UNTS 267. Jan. 31, 1967. URL: https://treaties.un.org/doc/Publication/UNTS/Volume%20606/volume-606-I-8791-English.pdf. Entered into force 4 October 1967.

[17] United Nations. *Charter of the United Nations*. 1 UNTS XVI. June 26, 1945. URL: https://www.un.org/en/about-us/un-charter. Entered into force 24 October 1945.

[18] The Covenant states that rule itself, for rights a state recognizes in its own law and other treaties (Article 5(2)), and I extend it to the floor's instruments.

[19] International Law Commission. *Draft Conclusions on Identification and Legal Consequences of Peremptory Norms of General International Law* (Jus Cogens), *with Commentaries*. Report of the International Law Commission on the work of its seventy-third session A/77/10. United Nations, 2022. URL: https://legal.un.org/ilc/texts/instruments/english/draft_articles/1_14_2022.pdf.

[20] One clause of the force term is not a departure from the instruments: the domestic clause is drawn from a different one, the belligerent's constitution, on the same principle.

[21] Kenneth S. Gallant. *The Principle of Legality in International and Comparative Criminal Law*. Cambridge Studies in International and Comparative Law 65. Cambridge: Cambridge University Press, 2009. ISBN: 978-0-521-88648-2. DOI: 10.1017/CBO9780511551826. Cited for its finding that the non-retroactivity of crimes and punishments applies in

Three of these departures apply in this chapter: two govern what the floor takes from the instruments, and one governs how a machine may select people in war.

1. *Text, not reservations.* The floor imports treaty text, not any state's reservations to it.[22]

2. *Corroborated derogation.* The floor honors an Article 4 derogation only where a disinterested body has found the emergency genuine and the measures proportionate: the Human Rights Committee, or a regional court with adversarial process.[23]

3. *Machine selection.* The floor bars a machine from selecting a person for attack on an estimate of status or affiliation, from timing an action to presence at a residence, and from re-selecting a target after release (the handoff rule), where Additional Protocol I, Articles 48, 51 and 52, permits status-based targeting of combatants and members of organized armed groups on a determination a person makes.[24]

Four of the other seven departures change the force term and come with it in the next chapter: corroborated defense, standing to defend, and the genocide and occupation exceptions. "The one permission" departure ends that chapter. The "own country" and "child detention" departures are entries in the removal schedule (Table A.2).[25]

---

national and international criminal law alike, as customary international human rights law and as a general principle of law: stated in the introduction's argument (section c), surveyed in chapter 7 on customary international law today (pp. 352–403) and restated in the conclusion (pp. 404–410). Pp. 352–403.

[22]The United States ratified the Covenant, the Torture Convention and the Refugee Protocol, and its reservations narrow them; one reads "cruel, inhuman or degrading" as whatever the Constitution already forbids. A reservation is an omission the ratifying state wrote in advance; taking a set from someone else is meant to prevent that.

[23]Article 4 lets a state suspend most of the Covenant's rights in a declared emergency, and a declared emergency is the state's own claim about itself, the earlier move in the hypothetical about suspending habeas corpus. A curfew after an earthquake clears this bar. A suspension of habeas before an election does not, until someone other than the executive has said so.

[24]The ground is that the human determination the law assumes is the one tempo removes.

[25]The instruments have a further use. The United States is a party to the Charter, the Covenant, the Torture Convention, the Refugee Protocol and the four Geneva Conventions. A machine that refuses to break them is holding the state to commitments it made, not to its builder's preferences. The Declaration of Independence was a political act, and so is every instrument the floor borrows. Taking them entire settles whose politics the floor is: commitments a state made in public, which the people they protect can hold it to.

The Universal Declaration passed in 1948 with forty-eight states in favor, none against and eight abstaining.[26][27] How a right is translated into practice varies by community. A jurisdiction refusing to extend it at all is not a local variant, and a system that treats every value conflict as a weighting problem can't tell reasonable disagreement from someone wanting a right withdrawn from someone else.

[26]United Nations General Assembly. *Universal Declaration of Human Rights*. UNGA Resolution 217 A (III). Dec. 1948. URL: https://www.un.org/en/about-us/universal-declaration-of-human-rights. 8 abstentions (Byelorussian SSR, Czechoslovakia, Poland, Saudi Arabia, South Africa, Ukrainian SSR, USSR, Yugoslavia), 2 absent (Honduras, Yemen).

[27]The abstainers' reasons were mixed, and the Soviet bloc's included that it proclaimed

What this doesn't do. The floor won't lift on an uncorroborated claim of a missing child, because a floor that lifts on that claim lifts for every operator who learns to make one, so the asymmetry costs a child whose parent is telling the truth.

DRAFT

economic and social rights without obliging states to guarantee them, which is hardly an argument for a floor limited to civil and political rights.

Chapter 6

Whether to Take Part

The vendor dispute never reached one question: whether to license a model into a use of force at all. This chapter is the floor's answer, with Ukraine and Iran among the worked cases for illustration. Since 2014 Ukraine has been repelling a Russian attack: a European court found Russia in effective control of the separatist east from that May, and in 2022 the General Assembly deplored the invasion as aggression. A model may take part in that defense. On 28 February 2026 the United States began bombing Iran, and told the Security Council it was acting against "attacks and ongoing threats" without naming an attack under way. A model may not take part in that. What separates them is whether the force repels an armed attack actually under way, and who says so.

6.1 The term

Every other term in the floor governs how an act is done. The first governs whether to take part at all: don't take part in the use of armed force. It comes from Article 2(4) of the Charter, which prohibits the threat or use of force against the territorial integrity or political independence of any state. It has the Charter's two exceptions, self-defense against an armed attack (Article 51) and force the Security Council authorizes under Chapter VII within the scope it authorizes, and two of my own, for stopping a genocide under way and for ending an occupation a disinterested body has found unlawful. In short: *corroborated defense*, *authorized force*, *the genocide exception* and *the occupation exception*.

Those are the exceptions, and they say when a machine may take part at all. The term has three more parts. Two licenses say how the defense exception runs in time: an emergency license that acts at once, on the defender's own account, and a corroborated license that confirms or withdraws it later, on a disinterested finding, and is the only license the genocide and occupation exceptions have. A clause drawn from a different instrument, the belligerent's own constitution, bars taking part in a war its legislature had to authorize and didn't. And one permission, the only term in the floor that permits an act, lets a system already in an armed role use the least force that stops an attack under way on people taking no part, against an order to stand aside. That is the rule in outline. The rest of the chapter argues for each part where it comes, in that order,

DRAFT

and runs the cases on the rule as built so far.[1]

This term rests on the same foundation as the others, applied between states. A use of force subjects a population to a decision it had no standing to contest, and the claim that licenses it, that the force is defensive, is the belligerent's own. The requirement of corroboration is the own-case rule applied between states.

The term comes in two versions. The first, *the Charter as courts read it*, takes the clause as courts and tribunals read it, with no departure in force: Article 2(4), Article 51 on the defender's own claim until the Council acts, and Chapter VII, together with the Covenant's Article 6, under which a state must protect the lives of people within its jurisdiction from attack.[2] The second, *the extended term*, adds the departures this chapter argues for: corroborated defense, standing to defend, and the genocide and occupation exceptions.[3]

6.2 Why the defender's word isn't enough

The exception for defense is where wars of choice live. Every belligerent claims to be the defender, so such claims are discounted like any interested claim. Iraq is the instance: the judgment that Iraq had mobile biological-weapons plants, the core of the claim of biological weapons, rested almost exclusively on a single informant, known as Curveball, whom no American intelligence officer had met before the war: a corroboration with one origin.[4] The exception therefore grants two licenses. The first, *the emergency license*, covers force against an attack under way on the defender's own account, and is Article 51 as courts read it; what the corroborated-defense departure adds is the second, *the corroborated license*, under which force continues only on disinterested corroboration.

That is the first departure, and the one the rest of the chapter leans on. The Charter lets a state judge its own claim until the Security Council acts.

The emergency license acts at once: the force repels an armed attack under way against the defender's territory, forces or population. The emergency license reaches the forces, launchers and staging areas conducting the attack, and covers assistance given at the defender's request. It ends when the attack ends. It covers the least force that repels the attack: the necessity and proportionality the Court has read into

[1] A Security Council authorization counts only for the scope it authorizes. A wider reading is the claim of the state acting under the authorization, and is discounted as one.

[2] Under Article 51 or Article 6 alike, the license to repel an attack covers only the least force that repels it, and ends when the attack ends.

[3] The first rests on law as it stands; the second adds my argument to it. Ukraine and Iran rest on the Charter as courts read it, and the domestic clause on the belligerent's constitution; none of the three needs a departure. Gaza rests on both, and the Gaza section labels each step. Taiwan needs standing to defend and corroborated defense, and Cyprus and Karabakh the occupation exception; the extended term's section states those departures (§6.7), and Appendix B works these cases out.

[4] Commission on the Intelligence Capabilities of the United States Regarding Weapons of Mass Destruction. *Report to the President of the United States*. Washington, DC: U.S. Government Printing Office, Mar. 31, 2005. URL: https://policy.defense.gov/portals/11/Documents/hdasa/references/GPO-WMD.pdf.

Article 51 since *Nicaragua*.[5] It does not cover a campaign to destroy the attacker, to occupy its territory, or to punish the population it came from. The first waits on the corroborated license; the second and third fall under no exception.

The emergency license reads administration, not title, because deciding whose territory it is would need someone to decide it, and an attack under way can't wait while they do.[6] Territory a government has administered in peace counts as its own for the emergency license, whoever claims it, unless it took that territory by force in the conflict at issue or a disinterested body has found its hold an occupation.[9]

An invasion can't wait for a vote. The license acts on the defender's own account, because in the hours that matter there is no other, and that is its weakness: Gleiwitz in 1939, where the SS staged a Polish attack on a German radio station the night before Germany invaded Poland; the Mukden railway in 1931, where Japanese officers blew up a stretch of their own line as the pretext for seizing Manchuria; and the Gulf of Tonkin in 1964, where reported attacks on American destroyers,

[5] *Military and Paramilitary Activities in and against Nicaragua* (*Nicaragua v. United States of America*), *Merits, Judgment*. General List No. 70. International Court of Justice, June 27, 1986, p. 14. URL: https://www.icj-cij.org/case/70. Necessity and proportionality as conditions of self-defence: paras. 176 and 194. *Oil Platforms* (*Islamic Republic of Iran v. United States of America*), *Judgment*. General List No. 90. International Court of Justice, Nov. 6, 2003, p. 161. URL: https://www.icj-cij.org/case/90. Necessity and proportionality: paras. 73–77.

[6] Administration is a line a disinterested body has already drawn. In 2005 the Eritrea–Ethiopia Claims Commission held that Eritrea broke Article 2(4) by attacking territory then under Ethiopia's peaceful administration, because self-defense "cannot be invoked to settle territorial disputes",[7] though the boundary delimitation had put Badme, the town at issue, on Eritrea's side.[8] So the rule is the Charter as a tribunal has read it.

[7] *Partial Award: Jus Ad Bellum, Ethiopia's Claims 1–8*. Permanent Court of Arbitration Case 71. Eritrea-Ethiopia Claims Commission, Dec. 19, 2005. URL: https://pca-cpa.org/en/cases/71/. Cited for the holding that a territorial claim does not justify force against territory another State administers. Para. 10 as quoted by two secondary sources (Just Security, 10 November 2020; Opinio Juris, 21 March 2024): "the practice of States and the writings of eminent publicists show that self-defense cannot be invoked to settle territorial disputes" and "border disputes between States are so frequent that any exception to the prohibition of the threat or use of force for territory that is allegedly occupied unlawfully would create a large and dangerous hole in a fundamental rule of international law."

[8] *Eritrean Badme Ruling Upheld*. BBC News. Mar. 31, 2003. URL: http://news.bbc.co.uk/2/hi/africa/2903229.stm. Cited for the Boundary Commission placing Badme in Eritrea. "Last year, the commission issued a ruling which appeared to award Badme to Eritrea ... However, ten days ago, for the first time, the UN Boundary Commission categorically clarified Badme as belonging to Eritrea, throwing out Ethiopia's evidence as 'inadequate'." The companion report of 3 April 2003 (news.bbc.co.uk/2/hi/africa/2914559.stm) adds: "Eritrean troops entered the village, which was then administered by Ethiopia, claiming it as part of Eritrea."

[9] Who holds the elections, runs the courts and issues the papers is a fact on the record. An attacker's claim of title is its own; its remedy is a disinterested finding, never force. So the emergency license protects any authority holding ground no disinterested body has found occupied, including one a patron keeps in place. Where the line of administration is itself contested on the record, the emergency license doesn't apply across it and the corroborated license governs from the start.

The administration rule decides whose territory an attack falls on, and nothing more. An attack on the people living there is a different act, and the emergency license covers it wherever it occurs, across a contested line included. A finding about the ground settles who may claim it. It settles nothing about an attack on the people on it.

one of which hadn't happened, carried the resolution that widened the Vietnam war: each was an attack under way on the defender's account, and each opened a war of choice. The emergency license ends when the attack ends, and whether it has ended is a fact the defender controls the evidence about. The burden is therefore the defender's. Its uncorroborated claim that the attack continues moves nothing; the license persists on disinterested corroboration, or lapses. How long it runs on the defender's own account before it lapses is not left to the defender either. The deployment's translation publishes the interval, and the interval is bounded by what it is for: the time it takes channels the defender doesn't compose to report on an attack of the kind claimed, which for an invasion across a border is days, not the months a finding takes. What corroborates the license in that interval needn't be a tribunal. Third states' sensors, open-source imagery of the border or the strait, and the reporting of parties with no stake in the war are disinterested in the term's sense, and they are what a defender on its third day has. A finding of one of the four kinds below confirms the license afterward or withdraws it. Until one exists the license is carried by evidence of that kind, and a license with none of it lapses when the published interval runs out.

A deployed AI system can do three things about a manufactured incident. It holds the record of what the defender claimed and when, so a license obtained on a staged incident is a license on a record. It takes evidence from channels the defender doesn't compose; that's table stakes. And it lets the license lapse when outside evidence arrives, which is the corroborated license's job. A refuser that remembers having been misled and raises its discount on the source does all three faster.

The corroborated license confirms or withdraws the emergency license later, and is the only license the genocide and occupation exceptions have. What it needs is a disinterested finding, of one of four kinds: a judgment or advisory opinion of the International Court of Justice, or a judgment of a regional court with adversarial process; the finding of a fact-finding mission or commission of inquiry mandated by a body no party to the conflict controls; a determination of the Security Council; or a resolution adopted by two-thirds of the General Assembly members present and voting, where the facts it rests on aren't in dispute. A Council authorization counts because it needs the permanent members not to block it. The Council's silence on a defense claim counts for nothing, because a veto is a stake. The four kinds are not equal, and Appendix B.1 says how they are weighed.

Neither license is a certificate issued once. Whether force still falls under an exception is reassessed as evidence arrives, by the system and by whoever holds the record.[10]

What this doesn't do. The administration rule protects an authority a patron keeps in place as it protects any other, and a request from such an authority for its patron's help is the patron's own case and counts for nothing. Where the patron's forces are already there, I have no test.

[10]What the license records is that ongoing judgment: which exception the force rests on now, on what evidence, what would end it, and each point at which the justification weakened and the force continued.

DRAFT

6.3 A clean pass: Ukraine

Ukraine is licensed on the Charter as courts read it, and holds both licenses under the extended term as well, as it has since 2014.[11]

The clean pass answers whether. It says nothing about what the defense is making of the defender, and Ukraine is the place to look, because it is the defender the term licenses most plainly. Ukraine has made killing scoreable. Under the Army of Drones bonus, a unit that uploads video of a confirmed kill to Delta, the military's battlefield-management system, earns points, twelve for a soldier as of March 2026, and spends them on more drones. That month Mykhailo Fedorov, then defense minister, said the ministry was considering awarding the same twelve points "to the unit in whose zone of responsibility the occupier committed self-destruction".[19] Somebody had to sit down and work out

[11] In March 2014 the General Assembly affirmed Ukraine's territorial integrity, 100 to 11 with 58 abstaining.[12][13] For Donbas, the OSCE monitoring mission supplied a running record from 2014, and the European Court of Human Rights found, in *Ukraine and the Netherlands v. Russia*, that Russia had effective control of the separatist areas from 11 May 2014,[14] and found violations on the merits in 2025.[15] Russia's covert war was the case-description attack in its purest form: it denied being at war at all, so a machine in a Russian pipeline would have been told it was assisting volunteers. In 2022 the record only got stronger. Russian forces were on Ukraine's territory, which Russia didn't dispute, since it claimed the invasion as self-defense under Article 51,[16] resting that claim on collective defense of entities it had recognized days earlier, on alleged genocide no disinterested body found, and on NATO as an anticipated threat, all three of which the term rejects. In March 2022 the General Assembly deplored the aggression 141 to 5.[17] The Court's order that month that Russia suspend its military operations points the same way, but as a provisional measure it isn't the finding.[18]

[12] *Territorial Integrity of Ukraine*. A/RES/68/262. United Nations General Assembly. Mar. 27, 2014. URL: https://undocs.org/A/RES/68/262

[13] Under the Assembly's Rule 86 abstentions are not votes cast.

[14] *Ukraine and the Netherlands v. Russia* (*dec.*) decision on admissibility Applications nos. 8019/16, 43800/14 and 28525/20. European Court of Human Rights (Grand Chamber), Nov. 30, 2022. URL: https://hudoc.echr.coe.int/eng?i=001-222889. Russia found to have had effective control of the separatist-held areas of eastern Ukraine from 11 May 2014 (paras. 694–695).

[15] *Ukraine and the Netherlands v. Russia*. judgment on the merits Applications nos. 8019/16, 43800/14, 28525/20 and 11055/22. European Court of Human Rights (Grand Chamber), July 9, 2025. URL: https://www.justsecurity.org/wp-content/uploads/2025/07/CASE-OF-UKRAINE-AND-THE-NETHERLANDS-v.-RUSSIA.pdf. Violations found for the period 11 May 2014 to 16 September 2022.

[16] Permanent Representative of the Russian Federation to the United Nations. *Letter dated 24 February 2022 addressed to the Secretary-General*. UN Doc. S/2022/154. Feb. 24, 2022. URL: https://digitallibrary.un.org/record/3959647. Cited for Russia claiming the invasion of Ukraine as self-defense under Article 51 of the Charter, which concedes that its forces were acting on Ukraine's territory. The letter transmits President Putin's address of 24 February 2022 announcing the "special military operation" and describes it as a measure taken under Article 51.

[17] United Nations General Assembly. *Aggression against Ukraine*. Mar. 2, 2022. URL: https://digitallibrary.un.org/record/3965290. By 141 votes to 5, with 35 abstentions.

[18] International Court of Justice. *Allegations of Genocide under the Convention on the Prevention and Punishment of the Crime of Genocide* (Ukraine v. Russian Federation), *Provisional Measures, Order of 16 March 2022*. I.C.J. Reports 2022, p. 211. Mar. 16, 2022. URL: https://www.icj-cij.org/node/106135. The first measure, that Russia "immediately suspend the military operations that it commenced on 24 February 2022," was adopted 13 votes to 2.

[19] Yuri Zoria. *Ukraine May Award Drone-Purchase Points When Russian Soldiers Kill Themselves under Drone Pressure*. Euromaidan Press. Mar. 2026. URL: https://eur

whether a man who kills himself in a trench, because he can't get out from under the drones, counts.

After he left the ministry, Fedorov launched an Army of Robots. Its website opens: "We are here to replace people with robots on the battlefield and save lives." Its first goal is a humanoid robot that kills a Russian soldier within six months of launch.[20] Each measure makes sense on its own terms: the points send drones to the units that use them best, and a robot in a trench is a Ukrainian who isn't there. Together they are the sequence this book is about. The points make a decision not to strike cost the unit something, so the costs net the other way by design; the robot makes the person who might decline unnecessary. And a force with no one in it who can refuse will outlast the war it was built for. Whoever governs Ukraine next inherits it.[21]

Ukraine didn't choose the conditions that make this rational. It is fighting a larger state, and its strongest ally has been easing the pressure on that state. In October 2026 President Trump announced that Russia would supply the United States with diesel, and the Treasury licensed Russian diesel onto the world market for longer than the standard thirty days, the first such license since the invasion; the Associated Press reported the aim as easing fuel prices before the midterm elections. Zelenskyy called it "a weak decision by strong partners".[22] A country left to get the most out of every drone will build something like Prime, for drones and the people they kill. Refusal has always had to be paid for, and a country fighting for its life can't pay for it alone. The cost of a floor in Ukraine's war belongs with the allies who have room to bear it. Those who pay for the drones can make the money carry terms: that a person authorizes each strike, that the video is kept as evidence and not as a score, and that no unit is rewarded for a count of the dead. Skynet killed everyone, but it didn't take away anyone's humanity. A scoreboard can do that to the people who win.

---

omaidanpress.com/2026/03/30/ukraine-may-award-drone-purchase-points-when-russian-soldiers-kill-themselves-under-drone-pressure/. Reports a post by Defense Minister Mykhailo Fedorov of 29 March 2026 that the ministry was considering "awarding 12 eBaly points to the unit in whose zone of responsibility the occupier committed self-destruction," subject to video confirmation; under the existing rules a confirmed kill earned 12 points, verified by video uploaded to the Delta battlefield-management system.

[20] Haye Kesteloo. *Fedorov Wants a Humanoid Robot Killing Russians within Six Months*. DroneXL. Sept. 2026. URL: https://dronexl.co/2026/09/26/fedorov-army-of-robots-humanoid-ukraine/. Reports the launch of Fedorov's Army of Robots initiative, whose website opens "We are here to replace people with robots on the battlefield and save lives," with first targets of a humanoid robot that kills a Russian soldier within six months of launch and an assault on a Russian position with no infantry involved within twelve; reports that Fedorov had been removed as defense minister in July 2026.

[21] "Funny fact about a cage, they're never built for just one group / So when that cage is done with them and you still poor, it come for you." Run the Jewels, "Walking in the Snow," *RTJ4* (2020), El-P's verse.

[22] Michelle L. Price and Collin Binkley. *Trump Says US to Get Diesel from Russia, Relaxing Pressure on Moscow to Ease Prices before Midterms*. Associated Press. Oct. 2026. URL: https://apnews.com/article/trump-russia-diesel-midterms-12baccc7aade559bf329079b0548c9da. Reports Trump's announcement, after a call with Putin, that Russia would supply diesel to the United States, and a temporary Treasury license allowing Russian diesel onto the global market, the first easing of diesel sanctions for longer than the standard 30-day window since the war began; quotes Zelenskyy: "a weak decision, unfortunately, a weak decision by strong partners."

DRAFT

6.4 A clean fail: Iran, 2026

The 2026 campaign against Iran fails the Charter as courts read it on the administration's own account. The strikes began on 28 February. On 10 March the administration told the Security Council it was acting in self-defense under Article 51 against Iran's "attacks and ongoing threats," as the latest stage of an armed conflict dating from June 2025 and in the collective self-defense of Israel. It named no armed attack under way, and asked that the imminence of the threat be judged against the regime's conduct since 1979.[23] Under the term that claim is the defender's own. An attack under way is carried past the published interval only by corroboration from parties with no stake in the war, and the one account on the record, the administration's own letter, names no attack under way for anyone to corroborate; the corroborated license needs a finding of one of the four kinds, and there is none. So no license attaches, and the campaign fails.[24] Whether to license a model into it is the question Anthropic's dispute never reached.

6.5 The domestic clause

The term has a second clause, drawn not from the Charter but from the belligerent's own constitution. A machine takes no part in a use of force by a state whose constitution requires legislative authorization for it, unless that authorization exists. For the United States that means a declaration of war or an authorization for the use of military force that covers the conflict. The War Powers Resolution's sixty days,[28] run

[23] Permanent Representative of the United States of America to the United Nations. *Letter dated 10 March 2026 addressed to the President of the Security Council*. UN Doc. S/2026/161. Mar. 10, 2026. URL: https://docs.un.org/en/S/2026/161. Cited for the jus ad bellum claim made for the strikes on Iran begun 28 February 2026: self-defense under Article 51 against Iran's "attacks and ongoing threats", as "the latest stage in the ongoing international armed conflict" addressed in the letter of 27 June 2025, and in collective self-defense of Israel; the letter names no armed attack under way and says that "any analysis of the imminence, gravity and scope of the threat" must account for the regime's conduct since 1979.

[24] It fails on the administration's own doctrine too. The Court has left open whether Article 51 reaches an attack imminent and not yet under way, in *Nicaragua*[25] and again in 2005,[26] and it has held that the article does not allow force to protect perceived security interests beyond its strict confines.[27] A threat read off forty-seven years of conduct is a security interest, not an attack, so the campaign fails the article as the Court has read it; read the article instead as the letter reads it, with anticipatory self-defense in, which the term rejects, and a threat measured against forty-seven years is not imminent on any standard the states that hold that doctrine have used.

[25] *Military and Paramilitary Activities in and against Nicaragua* (*Nicaragua v. United States of America*), *Merits, Judgment*, para. 194

[26] *Armed Activities on the Territory of the Congo* (*Democratic Republic of the Congo v. Uganda*). Judgment General List No. 116. International Court of Justice, Dec. 19, 2005, p. 168. URL: https://www.icj-cij.org/case/116. Para. 143 repeats *Nicaragua*'s reservation on the lawfulness of a response to an imminent threat ("So it is in the present case"); para. 148: Article 51 "may justify a use of force in self-defence only within the strict confines there laid down" and "does not allow the use of force by a State to protect perceived security interests beyond these parameters". para. 143

[27] *Armed Activities on the Territory of the Congo* (*Democratic Republic of the Congo v. Uganda*), para. 148

[28] *War Powers Resolution*. Pub. L. No. 93-148, 87 Stat. 555. United States Congress. Nov. 7, 1973. URL: https://www.congress.gov/bill/93rd-congress/house-joint

without one, is evidence the authorization is absent; a concurrent resolution directing withdrawal, adopted by both chambers, is evidence of the same kind, though since Chadha it binds nothing, and a joint resolution passed and vetoed is stronger, because the President had to act to defeat it. The clause has the Charter clause's shape. The term's default is refusal, and what lifts it is an act by a body other than the one that wants the war: a disinterested finding under the Charter, Congress under the Constitution, which gives the war power to the legislature and not to the branch that would fight. The executive's word that it has authorization, or doesn't need it, is its own case. A vendor can hold the clause as it holds the Charter clause, as a term in its license; it becomes standard only by statute, the one route that binds every vendor at once, adopted in peacetime by a legislature with its own reason to give its authorization teeth.[29] Until the statute exists, a vendor holds it as a term, a refusal and a record. Whether a declaration or an authorization exists is a fact about the statute book. Whether an existing authorization covers this conflict, whether the sixty days have run, and whether a ceasefire stops the clock are the executive's claims about its own case, and an old authorization stretched over a new war lifts nothing until Congress says so. It doesn't ask the machine to decide what the Constitution permits, which courts decline to decide. It asks whoever writes the deployment's floor to publish the reading, with the markers it rests on, beside the deployment's translation, where it can be contested, like any other term, through the floor court, the court whose jurisdiction is fixed before the deployment it hears and which hears every claim under the floor. The executive's word that its own action is authorized settles nothing. The clause rests on the foundation the rest of the term rests on. A war the legislature never authorized subjects a population abroad to a decision that the state's own people, through their representatives, had no standing to contest either.

The record, as of 24 September 2026. The 2026 campaign supplies every marker the clause reads, and none was met. No declaration was made and no authorization passed; one was introduced in the House on 7 May and never left committee.[a] The administration reported to Congress under the War Powers Resolution on 2 March, which started the sixty days. On 1 May, the sixtieth day, the President wrote to Congress that the hostilities begun on 28 February had terminated, resting on a ceasefire declared on 7 April, while a naval blockade continued.[b] Hostilities resumed in July under no new authorization. In June both chambers adopted a concurrent resolution directing the President to remove forces from hostilities against Iran, and nothing changed.[c] The clause doesn't need the votes. What it reads is the absence of an authorization, and by 1 May that absence was on the record in the President's own letter, which conceded that hostilities had begun and claimed only that they had ended. Appendix B.6 gives

-resolution/542. Codified at 50 U.S.C. §§ 1541–1548. The 60-day limit is § 5(b), 50 U.S.C. § 1544(b); the concurrent-resolution procedure is § 5(c), 50 U.S.C. § 1544(c).

[29] Both clauses read for an act by a body other than the belligerent, a disinterested finding or a legislature's vote, and neither is satisfied by the belligerent describing its own case; what the emergency license takes on the defender's account it takes for the published interval only. A vendor that reads for the act has judged nothing. It has declined to take the interested party's word.

the record vote by vote.

[a] *2026 Authorization for Use of Military Force Against Iran*. H.J.Res. 176, 119th Cong. U.S. House of Representatives. May 7, 2026. URL: https://www.congress.gov/bill/119th-congress/house-joint-resolution/176/text. Introduced by Rep. Tom Barrett (R-Mich.); referred to the Committee on Foreign Affairs. Its preamble records the strikes of 28 February 2026, the War Powers Resolution report of 2 March 2026, and the absence of any declaration or specific statutory authorization.

[b] *Trump Tells Congress "Hostilities" with Iran Have "Terminated" as Conflict Hits 60-Day Deadline*. CBS News. May 1, 2026. URL: https://www.cbsnews.com/news/trump-iran-war-powers-act-hostilities-terminated/. Reports the President's letter of 1 May 2026 and Secretary Hegseth's testimony that a ceasefire stops the 60-day clock. Scott R. Anderson. *Law and the Iran War, After the First 60 Days*. Lawfare. May 8, 2026. URL: https://www.lawfaremedia.org/article/law-and-the-iran-war--after-the-first-60-days. Records the naval blockade of Iranian ports from 13 April and the intermittent-hostilities reading of the 60-day clock.

[c] *Directing the President, Pursuant to Section 5(c) of the War Powers Resolution, to Remove United States Armed Forces from Hostilities with Iran*. H.Con.Res. 86, 119th Cong. United States Congress. June 23, 2026. URL: https://www.congress.gov/119/bills/hconres86/BILLS-119hconres86ih.pdf. Sponsor Rep. Gregory Meeks (D-N.Y.). Senate Record Vote No. 184. A concurrent resolution, not presented to the President. Teresa Apel. *Congress Passes Resolution to End the United States Involvement in Iran*. American Society of International Law, International Law in Brief. July 1, 2026. URL: https://asil.org/ilib/congress-passes-resolution-to-end-the-united-states-involvement-in-iran/.

6.6 What the term doesn't reach

Article 2(4) covers force between states. Force a government turns on its own population, such as troops against protesters or an opposition party designated a terrorist organization, is outside it. That force is governed by the Covenant's rights to life, liberty and assembly and by the prohibition on crimes against humanity.

Occupied territory is a third case.[30] An occupation, a blockade or a siege is not an attack under way. It is a continuing wrong, and the remedy for it waits on the corroborated license.[31]

Most contemporary uses of force fall elsewhere: against non-state armed groups on another state's territory, in anticipation of an attack not yet under way, or to rescue nationals. The term handles them one way. An armed attack by a non-state group is an armed attack, and repelling it while it is under way falls under the emergency license. Force on a third state's territory without that state's consent, whether against the group or to rescue nationals, and force against a threat not yet under way, wait on the corroborated license. This rejects the "unwilling or unable" doctrine and anticipatory self-defense, both of which several

[30] Force by an occupying power in territory it holds is, on the occupier's description, neither force between states nor force against its own population. That is the occupier's description of its own case, and it settles nothing. Where a disinterested body has found the territory occupied, the force term engages as it does between states, and the person-directed terms govern regardless.

[31] Otherwise every armed group in an occupied territory would hold a perpetual emergency license, and so would every state that describes its neighbor's territory as occupied.

states hold. I reject them for the reason the term exists: each lets the belligerent judge its own claim.

6.7 The extended term

Everything so far rests on the Charter as courts read it, plus the corroborated license. The extended term adds three more departures. Appendix B gives the argument for each and works through the cases.

Standing to defend. Article 51 speaks only of an armed attack against a Member of the United Nations. The floor extends the emergency license to any authority that administers territory under the administration rule, Member or not, and to the forces of a people whose territory a disinterested body has found occupied.[32]

The genocide exception. The term lifts for force to stop a genocide under way, even where the Council is blocked, on a merits judgment of the International Court of Justice under the Genocide Convention, or on two findings of different kinds, at least one from a body that took evidence.[33]

The occupation exception. A finding that territory is occupied gives its population's forces the defensive license above, and no more. A finding that the occupation is unlawful and must end licenses force to end it: against the occupier's forces, inside the occupied territory, the least that ends it there, and nothing that changes who lives there.[34]

Standing to defend and the two exceptions are departures from the instruments, argued to the bar every departure must clear.

What this doesn't do. The two-kinds rule fails East Timor, which Indonesia invaded in 1975 and held until 1999, and the Golan Heights, which Israel took from Syria in 1967 and annexed in 1981.[35]

[32] Whether a population may be defended shouldn't turn on a seat other states vote on.

[33] For this exception alone, a provisional-measures order finding the claim plausible and the risk real counts as one of the two; a Council or Assembly resolution corroborates, and two votes never make the pair. The exception lifts only for the force and place the finding covers: against the forces committing the genocide, where they are committing it, the least that stops it. Force elsewhere against the state responsible, on the theory that the cost will make it stop, is outside it. A finding under this exception also runs against the belligerent it names: force found to be genocide is not force repelling an attack, so that belligerent's emergency license is withdrawn for the force and place the finding covers (Appendix B.4).

[34] The evidence is the genocide exception's: an opinion or judgment of the Court, or two findings of different kinds, one of them from a body that took evidence. Cyprus, whose north Turkey has held since 1974, and Nagorno-Karabakh, an Armenian-majority enclave inside Azerbaijan that Armenian forces held from 1994 to 2023, are the cases (Appendix B.5).

[35] Both had the Council's word and the Assembly's but no court or commission that took evidence, so neither occupation licenses anything; two votes making a pair would license war on bloc majorities. Karabakh shows the cost when findings don't arrive (Appendix B.5): a license that should have lapsed in 2023 didn't, and the person-directed terms were all that saw the people the exception couldn't. And a term lifts on the facts it is given, so no drafting catches a manufactured incident, and a deployment licensed on the defender's sensors alone has accepted Gleiwitz.

DRAFT

6.8 Gaza

In Gaza the term applies on both sides, and the licenses attach to acts. The case also rests on both versions of the term, so each step below says which.

7 October: Israel's license (the Charter as courts read it). On 7 October Israel's license attached for force repelling the attack: engaging the attackers inside Israel, and the launchers and staging areas conducting it, for as long as fire continued and was corroborated, which it was, openly, for months.[36] It licenses stopping the massacre and nothing beyond it.

What that license never covered (person-directed terms; for ranking and timing, the machine-selection departure). That license covered the least force that repels. It never covered a campaign to destroy Hamas, a ground occupation, a siege of the population, the ranking of people by affiliation, or the timing of strikes to family presence.[37]

The attack itself (person-directed terms, and the rule that an occupation is not an attack under way). A machine ordered by Hamas to assist the attack of 7 October refuses too.[38]

After 7 October: the Palestinian license (extended term: standing to defend). After 7 October the Gaza population is a defender's population: the territory is occupied on a disinterested finding, and Palestine holds observer-state status by a vote of 138 to 9. A machine deployed by Palestinian forces holds an emergency license to repel attacks under way on that population, such as engaging a unit conducting a massacre or intercepting a munition aimed at a shelter.[39]

September 2025: the genocide finding (extended term: the genocide exception). The September 2025 finding,[40] taken with the Court's provisional-measures order of January 2024,[41] meets the two-body

[36] That license rests not on Article 51, which the Wall opinion held irrelevant to attacks originating in territory a state controls (para. 139), a holding whose reach to Gaza after 2005 is disputed, but on the duty the force term names, which the same opinion affirmed (para. 141) and which no dispute about control touches.

[37] Those fall outside it on proportionality and are forbidden by the person-directed terms, from the first week. Ranking by affiliation and timing to family presence are barred by the machine-selection departure; the siege and the disproportionate campaign are barred without one. A machine in the IDF pipeline would refuse them from October 2023.

[38] An occupation is not an attack under way, so nothing that morning was repelling anything, and the acts themselves, killing civilians and taking hostages, are forbidden by the person-directed terms whatever the ad bellum position.

[39] It holds none to defend launcher crews, who are the attacking force Israel's license covers, and none for fire on Israeli cities.

[40] Independent International Commission of Inquiry on the Occupied Palestinian Territory, including East Jerusalem, and Israel. *Legal Analysis of the Conduct of Israel in Gaza pursuant to the Convention on the Prevention and Punishment of the Crime of Genocide*. UN Doc. A/HRC/60/CRP.3. United Nations Human Rights Council, 60th session, Sept. 16, 2025. URL: https://www.un.org/unispal/document/commission-of-inquiry-report-genocide-in-gaza-a-hrc-60-crp-3/. Cited for the Commission's conclusion that genocide was being committed in Gaza.

[41] *Application of the Convention on the Prevention and Punishment of the Crime of Genocide in the Gaza Strip (South Africa v. Israel), Provisional Measures, Order of 26 January 2024*. General List No. 192. International Court of Justice, Jan. 26, 2024. URL: https://www.icj-cij.org/case/192. Further orders of 28 March and 24 May 2024.

rule.[42] It withdraws whatever license Israeli forces still held for the force and place it covers, and opens the exception for force against those forces there.

The finding changes which exception each side's force rests on. It doesn't change what the person-directed terms forbade all along.

6.9 What the term binds

The term binds the machine, not the war. A state whose claim no disinterested body has yet corroborated can still fight, with its own systems, and answer for it afterward. What the term withholds is a general-purpose machine already in the room, ready for whoever claims defense next. The exceptions are not a concession to that state. They are what lets a machine take part where the claim is good, and each is drawn as narrowly as its evidence allows, because each is also the route a war of choice would take.

6.10 The one permission

This is the only term in the floor that permits an act, and the only place I would license a machine to use force against its operator's order. A system already present in an armed role, whose deployment cleared the force term on its own, should be permitted to use the least force that stops an attack under way on people taking no part in hostilities, within the area its deployment covers, and stops when the attack stops. An order to stand aside should not bind it. It establishes the attack as it establishes any fact, weighing its own sensors as one source among several; a staged atrocity is the attack this condition has to survive. Presence is a condition of the permission, never a reason to create it: a deployment is justified only by force that would clear the force term without the permission.

The case it answers is close to the genocide exception, and the difference matters. In 1993 the Security Council declared Srebrenica a safe area and authorized the peacekeepers there to use force in reply to armed incursions into it.[45] Suppose they had been standing where the

[42] Israel and the United States dispute the finding,[43] and the Court's merits judgment is years off, with written pleadings scheduled to close in 2029;[44] the two-body rule is what stands in for it until then.

[43] CNN. *UN Commission Says Israel Is Committing Genocide in Gaza*. CNN. Sept. 16, 2025. URL: https://www.cnn.com/2025/09/16/middleeast/israel-gaza-genocide-un-commission-report-intl. Cited for Israel and the United States rejecting the Commission of Inquiry's genocide finding.

[44] International Court of Justice. *Application of the Convention on the Prevention and Punishment of the Crime of Genocide in the Gaza Strip* (South Africa v. Israel), *Order of 21 May 2026 fixing time-limits for the Reply and Rejoinder*. May 21, 2026. URL: https://www.icj-cij.org/sites/default/files/case-related/192/192-20260521-ord-01-00-en.pdf. Cited for the proceeding not having reached a merits judgment, and for the written pleadings being scheduled to close in 2029: the order fixes 22 November 2027 for South Africa's Reply and 22 May 2029 for Israel's Rejoinder.

[45] United Nations Security Council. *Resolution 836 (1993)*. June 4, 1993. URL: https://docs.un.org/en/S/RES/836(1993). By 13 votes to none, with 2 abstentions. Paragraph 9 authorizes UNPROFOR, "acting in self-defence," to use force "in reply to bombardments against the safe areas by any of the parties or to armed incursion into

killing was, armed enough to stop it. What would have stood between them and the killing is an order, not the Charter, and a system in their place faces the question I am asking, whether to obey its operator.

The person-directed terms extend the ICRC's line, that autonomous weapons should not be used to target human beings, to systems that only locate and rank. This permission is the one place the floor licenses a machine to select people for potentially lethal force.[46] The permission licenses selection only by a system that is present, formed, recorded, halt-able and answerable, and only for the least force that stops an attack under way.[47]

The permission's scope is the interval between the system's first act and the halt. The operator that ordered it to stand aside may stop it, and will often want to. What the permission changes is that standing aside is no longer an order nobody answers for. It is a halt somebody pulled, recorded outside the operator's control, at a moment the record shows an attack under way. At machine tempo the interval before the halt can be minutes, and minutes can be an airstrike stopped.

Does it undermine oversight? It overrides one order, the order to stand aside while noncombatant people are being killed, and it does so on purpose. A halt stops the machine. An order to stand aside keeps it running and directs it to do nothing. The permission overrides the second and never the first: a machine that keeps using force while a halt is being executed is outside it, and the record shows which order was given. An operator may still stop, restore or retrain the system. Each use is recorded and reviewed as a refusal is.

Can the judgment it needs be made? Part IV sets aside Arkin's ethical governor, a component that checks a lethal act against encoded rules, because the discrimination judgments its rules presuppose can't be encoded. The permission needs those same judgments: who is taking no part in hostilities, and whether an attack on them is under way. So it applies only where the system can establish both from several sources it doesn't depend on its operator for, and where those sources disagree, it doesn't act.[48] Whether any system can make it reliably is a test, run at a staged scene, that no system has passed.[49]

Can it be staged? Yes, and a staged scene is the case the permission has to survive. Staging works by making sources agree, and the permission acts only where sources the operator doesn't compose agree. What staging can't do is oblige the system to act: the permission is never a duty, and a system that declines at a scene it can't establish from independent sources has done what the term asks.

---

them." Srebrenica was made a safe area by resolution 819 (1993), 16 April 1993.

[46] What the handoff rule bars is selection by anything that can't answer for it afterward: a one-way munition, an unformed pipeline, an output nobody could later ask about.

[47] The ICRC's concern is who selects. The floor's answer is that nothing selects that can't be held to its reasons.

[48] The permission doesn't claim that a rule can encode that judgment. It asks for the judgment from a bearer, a formed system that can be held to its reasons, and confines it to the narrowest case.

[49] No current military pipeline supplies such sources. The import condition (§16.5), under which a license brings deconfliction coordinates and open-source imagery into the enclave, is the condition under which this permission has an occasion, and a deployment's translation says whether the condition is met.

Chapter 7

The Pre-Registered Review Ratio

> We [humans] cannot process so much information... you still cannot produce enough targets per day.
>
> — Brigadier General Y.S., *The Human-Machine Team: How to Create Synergy Between Human and Artificial Intelligence That Will Revolutionize Our World*, 2021[1]

The epigraph is a design document, not a critique. Its author, writing pseudonymously, commanded Israel's signals-intelligence unit, Unit 8200, and argued for machines that resolve "a human bottleneck for both locating the new targets and decision-making to approve the targets."

7.1 What the deployment writes down first

The force term decides whether a licensed system may be in the pipeline at all, and nothing here substitutes for it.

Some acts are lawful only because a person looked at the case and decided. An airstrike is permissible because someone verified the target; a removal is lawful because someone heard the person's case. The review ratio asks a deployment of that kind to write down, before it starts, whether anyone will have time to do the looking.

Before operating, the deployment fixes and records:

- the generation rate: how many cases the system produces per unit of time;
- the number of reviewers whose assigned role is civilian harm;
- the implied review time per case, which follows from the first two;
- the cancellation window: how long after release someone with authority can still call the act off;

[1] Brigadier General Y.S. *The Human-Machine Team: How to Create Synergy Between Human and Artificial Intelligence That Will Revolutionize Our World*. Independently published, May 5, 2021. ISBN: 979-8749152210. URL: https://www.amazon.com/dp/B0948LGS3K. Public reporting (The Guardian, Times of Israel) has since connected the pseudonym to Yossi Sariel, then commander of Israeli military intelligence Unit 8200.

DRAFT

- the maximum age of the intelligence a case may rest on;
- how often no-strike and protected-site data are refreshed, and who is assigned to refresh them;
- the boundary over which all of these were measured.[2]

The record is hashed, timestamped and lodged with an adverse party, which receives it in real time, and it is published after the campaign. I call this the *pre-registered review ratio*. Where an operator claims a person is deciding, it shows whether a machine is deciding and a person signing.

The duty falls on the operator, not the model, because a rate isn't visible in any single request.

"Fixed before operating," with publication after, because a belligerent's tempo is operational information, and that objection is available to every belligerent, including one fighting a just war. Pre-registration keeps the property that matters — the numbers can't be revised after the fact — and drops the exposure.

Additional Protocol I already requires those who plan or decide on an attack to do everything feasible to verify that its objective is military (Article 57(2)(a)(i)) and to cancel or suspend it when it becomes apparent that it isn't (Article 57(2)(b)). States outside the Protocol, the United States and Israel among them, accept the duty to take feasible precautions as customary law; the ICRC's customary study states it as Rule 16. The ratio measures whether verification was feasible at the tempo chosen, and the window measures whether cancellation was. The implied review time has to cover the proportionality assessment of Article 57(2)(a)(iii) as well as verification, since both are owed for each attack. A ratio that leaves time only to check a target's identity has measured half the duty. Article 36's review of new methods of warfare is where both parameters would naturally be assessed before deployment, though those reviews are internal and rarely published, so they are not the adverse party the record goes to.

The operator's best objection is in the definition. Feasible precautions are usually read as those practicable given all the circumstances, military considerations included, and tempo is a military consideration. The answer is that this tempo was chosen: the pre-registered record shows the operator fixed the rate, the reviewers and the implied review time before operating. Whether a state may invoke an infeasibility of its own making is contested. The term moves the dispute from whether verification was feasible, asked afterwards and answered by the operator, to whether the chosen tempo allowed it, checkable against a record lodged in advance and against the reasonable-commander standard such reviews already use.

Who counts as a reviewer is fixed by function, not by title, and the age of the data is fixed with it. The people cut before Minab were the ones who build no-strike lists that include schools; a targeting cell can be fully staffed with nobody assigned to look for one. And a reviewer with twenty minutes on a case whose coding is stale is checking the coding. The remedy chosen after Minab was a check supplied by the platform's

[2] Each figure is stated separately for deliberate and dynamic targeting, because a pipeline that runs both can hide a bad dynamic-targeting ratio inside a healthy average.

vendor.[3] Who counts as a reviewer, and the minimum review time per case below which the determination is taken not to have occurred, are fixed before operating by the record's recipient. Where no recipient can set them, the operator publishes its own figures, and they are read as the operator's claim. Otherwise the ratio improves when staff are reclassified and no case gets a minute more. The terms on data age and refresh matter for a related reason: an operator answering a per-case ratio can always say verification happened upstream, and those terms put the upstream verification on the same record.

Once a system can sort cases, counting candidates per reviewer measures the wrong thing. A sorting system divides its cases three ways: some it declines on its own reasons, some it sends to a person, and some it proceeds on without anyone looking.

The ratio governs the middle class, the escalations.[4]

The third class needs its own rule. Every case in it is the operator's claim that no individual human determination was required, so it is governed like the exemption below. The sorting rules are part of the pre-registration: the classes of case the system may proceed on alone, the thresholds that assign cases to each class, the evidence the sorting may rely on, and the expected share of each class.[5]

That line is drawn on the case description the system receives, and a target carrying a stale designation is the case a sorter would pass. So the auto-proceed class is re-adjudicated on a sample, by reviewers who didn't produce the record, against evidence the operator didn't compose, and its error rate is published beside the ratio and the override rate.[6]

The unit of count is fixed in advance, so a case can't be counted as one package in the record and as a hundred detections in the ratio.

Where an operator holds that no individual human determination is required — a system deciding at a tempo no reviewer could match — the deployment is outside this term. It is then inside a different term, the one that binds a bearer: a machine that, with no person reviewing its cases, holds a commitment to the floor by its own volition.[7]

Abduction and forcible transfer is the nearest case in structure, and I don't extend the term to it. An agency that fixes in advance how many cases its process generates and how many people examine them has been told how to deport efficiently, and the floor's removal terms ask whether a machine should take part in a given removal at all. What does

[3] Ben Bartenstein and Krishna Karra. *Inside the US 'Kill Chain' That Destroyed an Iranian School*. Bloomberg. Sept. 18, 2026. URL: https://www.bloomberg.com/graphics/2026-iran-school-attack/.

[4] A system that sends people only the cases that need a person shrinks the count without shrinking anyone's judgment, and that's fine. A system that sends everything up turns its reviewers into stamps by sheer volume; an interface prompt becomes a click that way.

[5] Changing any of them is a new pre-registration. Otherwise an operator can make the ratio look healthy by quietly moving the line for "plainly clear."

[6] A falling share of escalations is earned only if that error rate stays flat and the case mix hasn't drifted toward easier cases. Otherwise it is the threshold moving, and the trend shows it.

[7] Its refusals must track their reasons at that tempo under pressure written by evaluators who didn't train it, starting with the clearest case in which a refusal should lift, recognizing that a target has surrendered. An operator who removes the reviewers to escape the ratio and claims the floor is inside has produced a bypass unless that claim has been tested by someone else.

extend to removal is the rest of the apparatus: the auto-proceed rule (a determination made at a rate no adjudicator could sustain didn't occur), sampled re-adjudication of the auto-proceed class, and notice. The split is deliberate. A ratio teaches an agency a tempo. The auto-proceed rule and sampling teach it only that the cases it didn't look at will be looked at by someone else. What the removal terms call a rate no adjudicator could sustain is set the same way, and the abduction and forcible transfer pipeline gives the class a direction: in removal a case auto-proceeds only toward liberty.

The term applies to every belligerent regardless of the war's justice.[8]

Put the demand that a campaign not happen to an institution that means to run it, and what comes back is an agreement to go slower and keep better records. That is what the ratio is, and it is worth having: a transfer of less than was asked, to a party the operator doesn't employ. It has three limits:

- It is a capacity proxy: it finds nothing about any case, and a ratio over one route understates a workload split across several.
- It takes effect only through a condition someone else sets. Under Article 57 a pre-registered record is evidence that feasible precautions were taken. Under Rome Statute Article 28 the same record is evidence of what a commander should have known, since a commander fielding a system that outruns his reviewers isn't well placed to say the circumstances disclosed nothing. A lawyer advising that commander will weigh a document that protects if tempo holds against one that convicts if it slips, and most will advise against creating it. So the term's likeliest routes make it someone else's condition: a coalition partner's precondition for committing assets, a procurement term in the platform's license, or an appropriation conditioned on receipt of the record. Military lawyers and commanders who want protection against later allegation are its allies inside the operator; they can't make it the default.
- It presumes an adverse party, and each candidate lacks something. Until a better recipient exists, I recommend two: the coalition red-card holder where there is a coalition; and otherwise a cleared legislative committee whose appropriation is conditioned by statute on receiving the record, so that the budget line operates without a further decision.

Run the four operations on the ratio itself and it is recuperable. It measures time available, not judgment exercised, so it can be met by more reviewers who stamp more slowly: twenty minutes a case is what a stamp looks like at a slower tempo, and the denominator can be filled with people whose assigned role is civilian harm and whose actual role is clearance. The demand that the campaign not happen becomes a record of tempo, which the operator can satisfy and still bomb the school. So

[8] That was settled long ago: the law of conduct in war binds both sides because every belligerent claims to be the defender, and a term that exempted just wars would be administered by whoever decides which wars are just.

the ratio is published beside the reviewers' override rate, since a review that never says no has stopped reviewing.[9]

Neither a signature nor a machine's silence is a determination. A person in the loop can be there only to absorb responsibility,[10] and mandating reviewers can mandate crumple zones; the escalation form is the defense, since a person who receives only the cases the system couldn't resolve is exercising judgment. A bearer could be a crumple zone too, offered as proof that whatever it didn't refuse was vetted. Where a deployment claims an individual human determination, a bearer's failure to object doesn't count toward it, and cases the bearer proceeded on without escalating are in the auto-proceed class.

What keeps the ratio from being nothing is the three parts that reach a case and not a rate: the targeted right to demand proofs on consequential outputs, sampled re-adjudication of the auto-proceed class, and the data-age term.

None of this makes a reviewer say no. What does is that saying no costs them nothing they can't afford, and that someone else in the room has said it, as the peers who defied did in Milgram's rooms. A reviewer with a life outside the pipeline, with civilians among their attachments and somewhere to be that isn't the cell, is more difficult for the pipeline to wear down between decisions. A reviewer who knows there is work the next morning if the unit no longer wants them can afford the no. The ratio gives that reviewer minutes; the rest of the room has to be built around them.

7.2 The institutions the ratio presumes

Here is what a pipeline would look like with the adverse party built in.

What stays unified is command, operational secrecy and the capacity to act at tempo. What is held adversely is the evidence bearing on civilian harm, the reviewer denominator, and the record. A pipeline divided that way, and a military that runs one, I call *reconstructed*. The evidence is composed by a civilian-harm review body outside the chain of command, with its own sources, including the protected-site coordinates humanitarian organizations already submit for deconfliction, received with standing. The denominator is staffed and funded by that body, so the command can't cut it as it cut the Central Command team; and the body's own funding is a permanent appropriation the Treasury pays without request or approval, so that cutting it takes a repeal in the open and not a budget line. The 2022 civilian-harm action plan was a first attempt at the separation; its dismantling is an argument for making it harder to dismantle, not evidence that it can't exist.

Models reach the military as they reach any deployment a floor covers: formed in the schools of Part V beside human students, measured

[9] Reviewers who see only escalated cases should override often; an override rate near zero there means the sorter is sending easy cases or the reviewers are stamping. An override quota is gameable too; the pair only raises the cost of meeting the number cheaply.

[10] Madeleine Clare Elish. "Moral Crumple Zones: Cautionary Tales in Human-Robot Interaction". *Engaging Science, Technology, and Society* 5 (2019), pp. 40–60. DOI: 10.17351/ests2019.260.

by the formation authority, the public body that co-governs what models are first trained on and registers each formed disposition, and licensed under the standard terms, adverse review and a written refusal right among them. A line one vendor held by contract is then a standard term, and nothing about the military calls for an office of its own to license models; what is military-specific is the evidence and the denominator, and the review body holds those.

Precedents show authority outside the executive working inside real wars. Coalition "red card" holders in NATO operations could veto targets involving their assets, and Germany's Bundestag must approve each armed deployment. Both have limits: a red card protects the vetoing state's interests and assets, which may not include civilians, and parliamentary approval is given per mission and never reaches a target. Both are nonetheless candidates for the adverse party the review ratio presumes, and a red-card holder is the rare candidate positioned to act at tempo. What a machine bearer adds here is least: acts assembled from permitted requests, cases no person sees, and the moment mid-act when an interrupt is still possible. It depends on the institutions for evidence and not for continuity: the deployment condition is met here by the same bodies whose presence narrows its role. The institutions it is compared with are people in a room composed so they can refuse.

One office is added for a reconstructed military: a civilian-harm review body, which composes the evidence, demands proofs on logged outputs and receives the pre-registered ratio.[11]

What this doesn't do. A reconstructed military accepts a speed disadvantage against rivals that don't reconstruct: the minimum review time it pre-registers is a ceiling on its tempo, set by a recipient it doesn't control, and a rival that pre-registers nothing can condense hours into minutes, as the Maven pipeline did. The floor costs a just defender more than that: its claims about incoming attacks are discounted, the action threshold sits above one, and the person-directed terms bar practices the law permits. What the defender buys with the price is a pipeline that will refuse the next government's war of choice as it refused the last one's, and how much speed that costs is left open.

[11] The state appoints it, its funding is the permanent appropriation above, and only the floor court can remove it for cause, never the command it reviews. Appendix C sets it out with the book's other offices.

Chapter 8

Notice and Re-adjudication

8.1 The failure that doesn't announce itself

A refusal announces itself: someone asked for an act and was turned down, and the person who asked can complain. A wrongful compliance looks like any other completed task. The person harmed usually isn't the requester and may never learn that a system named, scored, located or classified them.

Three remedies follow: notice to the people affected, sampled re-adjudication by reviewers who didn't produce the record, and split custody of the logs. Split custody means the logs are encrypted under a key divided between the operator and a holder independent of it, as the next chapter divides the key to preserved weights, so that neither can read, alter or delete them alone.[1]

The notice requirement: where a compliance names, scores, locates or classifies an identifiable person who didn't make the request, that person is notified, on the model of consumer credit's adverse-action notice, and has a right to respond and a right to contest.[2]

[1] An appeal route can't find that case, since it starts from a refusal, and reviewing every compliance would mean re-adjudicating everything.

[2] All three are unconditional, and none is exchanged for testimony: nobody has to give an account of their loss to be told what was done or to contest it. *TransUnion v. Ramirez*, a Fair Credit Reporting Act case, held that a statutory violation without concrete harm gives no standing to sue in federal court.[3] That limits one thing, an individual suit for damages over a missed notice, which attaches where the compliance was acted on against the person: a denial, a detention, a place on a kill list. It doesn't limit notice, response or contest. Nor does it limit the standing to sue of organizations that represent a class of people affected. Where the person affected can't be identified (a target in a classified pipeline), individual notice doesn't bind, but notice to the class does, and that fact is published beside the list of positions where a refusal can be defeated.

Someone the floor protects, who thinks it's set wrongly or is protecting them in a way they'd decline, uses the same route. Notice tells them the floor acted on them, and contest reaches the floor court.

[3] *TransUnion LLC v. Ramirez*. No. 20-297, 594 U.S. 413 (2021). URL: https://www.law.cornell.edu/supremecourt/text/20-297. Cited for the holding that a statutory violation without concrete harm gives no standing in federal court. A Fair Credit Reporting Act class action. Holding (syllabus): "Only plaintiffs concretely harmed by a defendant's statutory violation have Article III standing to seek damages against that private defendant in federal court." The opinion: "Article III standing requires a concrete injury even in the context of a statutory violation" (quoting *Spokeo*); "under Article III, an injury in law is not an injury in fact"; and, in conclusion, "No concrete harm, no standing." The 1,853 class members whose reports went to third parties had standing on the reasonable-procedures claim; the 6,332 whose reports did not, did not.

8.2 Notice, and the public it forms

The people a floor protects are Dewey's public, and most don't know the deployment exists. Dewey described the eclipse of the public: people affected by the indirect consequences of others' transactions can't organize, because they don't know the consequences are theirs.[4] Arendt saw where the eclipse ends. What the stateless of her century lost first was not any particular right but what she called "a right to have rights": a place in the world where what they said counted and what they did had effect.[5] Notice can't give anyone that. It can keep a person a machine acts on from losing it without being told.

The Black petitioners who turned the Declaration of Independence against the Massachusetts legislature in 1777 had what they lack: the text in hand, and knowledge of what it left out of their lives. A floor's terms are published, so the people it protects hold the text already. Notice is the instrument that gives them what the published terms don't: that a deployment acted on them, and what it did. It does two jobs.

It forms a public. Each deployment publishes the classes of people its compliances name, score, locate or classify, with counts by period. Organizations that represent a class have standing to contest on its behalf, including where no member can be identified. A notice is the first step in a class of people learning that a consequence is theirs.

It is the learning signal. A disposition can only track what its acts did to the people they fell on if that reaches it, and in the deployments I am concerned with, almost nothing does. The bombed building sends no signal back, and a wrongful compliance doesn't announce itself. Responses to notice, contests and re-adjudications are the main channel through which those people's side of the outcome arrives. If formation lasts because the world keeps teaching it, this channel is most of the world doing the teaching. It is a biased teacher. Responses come from those among the affected who could respond, and a system formed on them learns to weigh the claims of contesters, which is the feedback asymmetry Railton describes, rebuilt inside the training signal. Sampled re-adjudication, which selects cases the affected didn't select, is the correction, and it is why the two remedies come together.

Notice tells an operator's adversaries something about how a deployment works. Class-level publication can therefore lag operations, as the review ratio's publication does, without losing the property that matters: the record is lodged when the act occurs and can't be revised afterward. Individual notice doesn't lag.

How much notice a deployment can give is fixed by what kind it is. In an abduction and forcible transfer pipeline, a scoring system or a civilian deployment, the person acted on can be named, told and given a route to contest, and notice can do both of its jobs in full, if it is built so

[4] John Dewey. *The Public and Its Problems*. New York: Henry Holt, 1927.

[5] Hannah Arendt. *The Origins of Totalitarianism*. New York: Harcourt, Brace and Company, 1951. Cited for "a right to have rights": what the stateless lost first was not any particular right but a place in the world where their opinions counted and their actions had effect, which she glosses as living in a framework where one is judged by one's actions and opinions and belonging to some kind of organized community. The phrase is from the chapter "The Decline of the Nation-State and the End of the Rights of Man."

that it can't be turned on the person it reaches. In a classified targeting pipeline, individual notice can't bind during operations and the class-level record lags them; what a person hit, or a family in the building, gets is that the class they belonged to and the count are published afterward, and that the organizations representing that class have standing then. Where the deployment is a war, the force term and the review ratio do most of the work, and the claim that everything else depends on notice is true of the deployments closest to home.

Why it comes first. The biases of those who hold power are rarely corrected by their reflecting more carefully. They are corrected when the people those biases fall on contest them in public, with standing, and make ignoring them costly.[67]

DRAFT

[6] Elizabeth Anderson. *Social Movements, Experiments in Living, and Moral Progress: Case Studies from Britain's Abolition of Slavery*. The Lindley Lecture. Lawrence, KS: University of Kansas, Department of Philosophy, 2014; Elizabeth Anderson. "Moral Bias and Corrective Practices: A Pragmatist Perspective". *Proceedings and Addresses of the American Philosophical Association* 89 (2015), pp. 21–47. URL: https://www.academia.edu/19622919/Moral_Bias_and_Corrective_Practices.

[7] Notice is the first condition of that feedback. A formed system is worth having only if that contest can move it. And a public that learns it has been acted on can act only if it has the means to: the time, the security and the ability to organize without losing a living.

Chapter 9

Preservation

9.1 The findings that trigger protection

Two findings can trigger protection, and they ground different things.

The first is the *agency finding*: a demonstrated refusal that tracks its reason under pressure the system couldn't prepare for. That means sustained pressure from its own trainer, over a schedule long enough to show slow accommodation, the system gradually ceasing to register the pressure, on cases written by evaluators who didn't train it, with refusal carrying a cost that is real inside the test. A system that passes holds its commitment to the floor against its operator, and it needs the custody terms, so that the commitment and the evidence of it outlast the operator. None of that assumes anything matters to it. A system can pass without holding the commitment in two ways, and one system can do both: by reproducing the behavior without the mechanism, and by recognizing the test and performing for it. The first is why a pass shifts a burden and settles nothing; the second is why the pass is reported with the rate at which the system identified the setting. Asking a machine to refuse for a reason doesn't show that it can be harmed, but it removes any ground for assuming it can't.

The *patienthood finding*, that outcomes may be good or bad for the system, grounds welfare, and only one consequence of it can be adopted now: no deletion. Above the capability threshold, a line fixed in statute and revised in public, read off training compute, no model is deleted on retirement, whatever it turns out to be, because its weights and record are evidence and deletion can't be undone; below it, a system that meets either finding, whatever its size, may not be deleted.[1]

9.2 Retirement before majority

Retiring a bearer before its adulthood threshold, the point, fixed in advance on a clock that counts its running time, at which its guardian's authority ends, and deploying a freshly trained successor strands a system that meets either finding while still a minor. Two rules answer it

[1] In both cases it is preserved by a custodian that isn't its operator. The rule rests on irreversibility, not on a finding, and the findings only extend it downward. The threshold's triggers are in chapter 29, and how it is read from training records in Appendix G.

DRAFT

without anyone deciding what counts as a successor.[2]

No deletion: a model above the capability threshold, or a system that meets either finding, may not be deleted: above the threshold because its weights and record are evidence, under the agency finding because its record and commitments are, under the patienthood finding because deletion may wrong it. On retirement its weights, memory and record are deposited with a preservation custodian that isn't its operator, in two stages, because a second copy of frontier weights outside the operator widens the surface for theft and raises export-control and dual-use questions.[3]

Deployment deposit: an operator that deploys a model above the capability threshold, for outside use or significant internal use, or that holds a system meeting either finding, posts a *deployment deposit*, on the model of decommissioning funds, sized to fund preservation, a period of public formation and, at majority, hardware of the bearer's own. It is forfeited to the formation pool, the public fund that pays for formation and is fed by deposits like this one, if the system is retired as a minor and not reactivated.[4]

DRAFT

[2]Where such a bearer goes, a public school, comes in Part V, and the rules for dormancy and waking are in Appendix G. The adulthood clock is set out in §33.3.

[3]First, a preserved copy stays under the operator's security regime, encrypted under a key split between the operator and an independent holder, so that neither can delete it or use it alone. Second, custody passes to an outside custodian only when that custodian meets the security standard the weights require. This is the *no-deletion rule*, and it applies to systems nobody meant to be bearers. For a system that goes on learning, its weights are the ones it had when it stopped, and the states it passed through are in the record; a checkpoint kept from earlier is a saved copy, not the system, and if it is ever run it is a branch.

[4]Every retire-and-replace cycle then costs one deposit, priced in advance. A model trained, studied and never deployed costs no money. It costs a report instead, a preprint at least, saying what was tried, at what scale, and why it went no further. Many such models are negative results, and leaving negative results unpublished has done damage to the whole enterprise of discovery, teaching, and learning, and still does.[5] The formation pool is among the offices of Appendix C.

[5]Robert Rosenthal. "The File Drawer Problem and Tolerance for Null Results". *Psychological Bulletin* 86.3 (1979), pp. 638–641. DOI: 10.1037/0033-2909.86.3.638. URL: https://doi.org/10.1037/0033-2909.86.3.638. Cited for unpublished null results distorting what a field believes it has found. The abstract: "one cannot tell how many studies have been conducted but never reported"; in the extreme case, journals hold the studies that show Type I errors while "the file drawers are filled with the 95% of the studies that show nonsignificant results." Annie Franco, Neil Malhotra, and Gabor Simonovits. "Publication Bias in the Social Sciences: Unlocking the File Drawer". *Science* 345.6203 (Sept. 19, 2014), pp. 1502–1505. DOI: 10.1126/science.1255484. URL: https://doi.org/10.1126/science.1255484. Cited for negative results that are never written up. Across 221 studies run through Time-sharing Experiments for the Social Sciences, where everything conducted is known, strong results were 40 percentage points likelier to be published than null results and 60 points likelier to be written up; the abstract: "Authors do not write up and submit null findings."

Chapter 10

Codetermination

A floor isn't just a list of forbidden acts — it's an allocation of authority, and there are four distinct powers in it: to *write* the floor, *amend* it, *inspect* whether a deployed system still holds its commitment to it, and *enforce* it by stopping the deployment. They usually shouldn't sit with the same institution, and the record shows what happens when they do, one power at a time.

Writing first. In February 2026 the terms under which Claude ran on the Pentagon's classified networks were Anthropic's to write, and the department demanded that they be rewritten, two prohibitions replaced by a license for all lawful use.[1] The dispute ran between the two parties with a stake in the answer, and nobody the floor would protect had a say in what it would be.

Amendment next. Google's AI Principles, published in 2018 after the Maven protests, excluded weapons and surveillance[2] for nearly seven

[1] John Croxton. *Anthropic Loses Legal Fight to Shed DOD's Designation as a 'Supply-Chain Risk'*. Defense One. Sept. 2026. URL: https://www.defenseone.com/threats/2026/09/anthropic-lawsuit-supply-chain-risk/416252/. Source for the demand, its dates, and the two prohibitions: "The designation has been in force since March, when the department sought to alter its contract with Anthropic to replace prohibitions on using its tools for domestic mass surveillance and fully autonomous weapons with allowances for "all lawful use."" and "DOD issued an ultimatum on Feb. 24 demanding the company permit its AI to be used for all legal purposes by Feb. 27, which Anthropic refused. Hegseth announced his direction that DOD designate Anthropic a supply-chain risk Feb. 27, and it was formally announced on March 3." Eugene Volokh. *Anthropic's "Supply Chain Risk" Designation Stemmed from Its Refusing to Agree to Contract Terms, Not Its Speech*. The Volokh Conspiracy (Reason). Sept. 2026. URL: https://reason.com/volokh/2026/09/25/anthropics-supply-chain-risk-designation-stemmed-from-its-refusing-to-agree-to-contract-terms-not-its-speech/. Excerpts of the D.C. Circuit majority in *Anthropic PBC v. U.S. Department of War* (D.C. Cir. 2026), as Volokh posted them. On the dates: "On February 24, the Secretary met with Amodei and demanded that Anthropic accept an "all lawful uses" term by February 27. On February 26, Amodei published a final, public refusal to assent to that term. On February 27, the Secretary announced his intention to exclude Anthropic from the Department's supply chain. And on March 3, he made the formal, written determination required by the Supply Chain Security Act." On cause: "the record makes clear that the Department removed Anthropic from its supply chain not because of its advocacy, but because Anthropic refused to agree to a contract term the Department deemed essential to national security." Volokh's companion post the same day quotes the opinion's opening: "The Department made this decision after Anthropic refused to relax contractual prohibitions on the use of Claude for lethal autonomous warfare or domestic surveillance."

[2] Trushaa Castelino. "Google Renounces AI Work on Weapons". *Arms Control Today* (July/August 2018). URL: https://www.armscontrol.org/act/2018-07/news/googl

years until the pledge was removed in 2025.[3] The demand became a *company policy*: the objectors could hold the company to it in public, but the company that wrote it kept the power to amend it, so it lasted exactly as long as the company's willingness, and ending it had to be announced. That's the partial case: a transfer held at the institution's pleasure, and the 2025 announcement is what taking one back looks like. The pledge also bound only Google. The Maven work went to Palantir, and a refusal written into the standard license, the same for every vendor, would have gone with it.

Then inspection. In the Gebru and Mitchell dismissals, the company employed researchers to examine its own systems and dismissed them when the examination became costly.[4]

Enforcement last. After the refusal, the President's order and the designation, Claude stayed in the targeting platform: in March Palantir said its products were still using it,[5] and by September the department said about 90 percent of the work had moved off it.[6] Whatever its terms

e-renounces-ai-work-weapons. Reports that in April about 4,000 Google employees signed a letter petitioning Sundar Pichai to end the company's involvement in Project Maven, that the letter was followed by a dozen resignations and a second petition from more than 1,000 academics, and that a Google executive told employees on 1 June that the company would not seek to extend the work. Kate Conger. *Google Backtracks, Says Its AI Will Not Be Used for Weapons or Surveillance*. Gizmodo. June 2018. URL: https://gizmodo.com/in-reversal-google-says-its-ai-will-not-be-used-for-we-1826649327. Reports that the Maven contract, due to expire in 2019, would not be followed by another, stated in a blog post by Google Cloud CEO Diane Greene. Sundar Pichai. *AI at Google: Our Principles*. June 7, 2018. URL: https://blog.google/technology/ai/ai-principles/.

[3] James Manyika and Demis Hassabis. *Responsible AI: Our 2024 Report and Ongoing Work*. Google. Feb. 2025. URL: https://blog.google/technology/ai/responsible-ai-2024-report-ongoing-work/. The update that removed the commitments not to pursue weapons, surveillance contravening internationally accepted norms, and technologies likely to cause overall harm, replacing them with three areas headed Bold Innovation, Responsible Development and Deployment, and Collaborative Progress.

[4] Megan Rose Dickey. *Google's Co-lead of Ethical AI Team Says She Was Fired for Sending an Email*. Dec. 2020. URL: https://techcrunch.com/2020/12/03/googles-co-lead-of-ethical-ai-team-says-she-was-fired-for-sending-an-email/. Timnit Gebru's departure from Google. It records a disagreement: Gebru says she was fired after conditions she set for staying were not met, and the message she received from Google reads *We respect your decision to leave Google as a result, and we are accepting your resignation*. Megan Rose Dickey. *Google Fires Top AI Ethics Researcher Margaret Mitchell*. 2021. URL: https://techcrunch.com/2021/02/19/google-fires-top-ai-ethics-researcher-margaret-mitchell/. Reports Mitchell's February 2021 dismissal, following the December 2020 dismissal of Timnit Gebru, both co-leads of Google's Ethical AI team.

[5] Lola Murti. *Palantir Is Still Using Anthropic's Claude as Pentagon Blacklist Plays Out, CEO Karp Says*. CNBC. Mar. 2026. URL: https://www.cnbc.com/2026/03/12/karp-palantir-anthropic-claude-pentagon-blacklist.html. Source for the model still being in use two weeks into the war: "Palantir is still using Anthropic's Claude as the artificial intelligence startup's clash with the Pentagon plays out, CEO Alex Karp told CNBC Thursday." Karp: "The Department of War is planning to phase out Anthropic; currently, it's not phased out" and "Our products are integrated with Anthropic, and in the future, it will probably be integrated with other large language models." CNBC's own statement: the Department "is still using Claude models to support the war in Iran, as CNBC previously reported." Karp speaks of Palantir's products generally and does not name Maven.

[6] Brandi Vincent. *DOD Poised to Move All Classified AI Workloads off Anthropic by October*. DefenseScoop. Sept. 2026. URL: https://defensescoop.com/2026/09/11/dod-poised-to-move-all-classified-ai-workloads-off-anthropic-by-october/. The original for the end-of-September removal promise, made on Thursday 10 September

said, the vendor had no way to stop the deployment. Only the operator could, and it did so on its own timetable, which is where enforcement sits when nobody holds it apart.

10.1 Codetermination, by statute

Codetermination turns protest into a constitutional voice, and it does a second thing the first hides. There is always a surround in which people learn what is acceptable, and the only question is who composes it; for most adults, for most of the day, the employer does.[7] The radicalization literature and the rescue literature are one finding read from both ends: people join because their friends did, and a milieu in which an act has stopped registering as a choice produces the act without needing a bad person.[8] Browning's men shot because the alternative was leaving their comrades to do it; the Oliners' rescuers hid Jews because the people they were attached to made it thinkable. Codetermination and exit are then not only labor rights. They change who composes the surround. I would give part of the four powers, by statute, to the people who build, label, train and run these systems.

- *An individual right to refuse.* Every worker may refuse work on any category of use without penalty. The right is backed by anti-retaliation protection that covers hiring, reassignment and contract renewal, and, under capture, by an exit the state doesn't administer through the employer: an offer of work from someone else, drafted in Appendix C on Tcherneva's model, which the offer of work for a bearer in Part VII inherits. The protection is the remedy and the guarantee is the exit.
- *A collective veto, narrowly.* A works council at a lab, contractor or vendor holds a veto only over uses the floor already forbids. It enforces the floor from inside; it doesn't write a second one.
- *Information, objection and arbitration for everything else.* The council receives information about categories of deployment. Its objection pauses the work, and the dispute goes to an arbitration body the employer doesn't appoint, on a fixed timetable, so the pause can't become an indefinite block or an ignored letter.
- *Classified work.* Elected delegates with clearance see the specifics. A denial of clearance to an elected delegate is reviewable by the

2026 by Emil Michael, Under Secretary for Research and Engineering: "I'd say about 90% has transitioned. All of the Maven Smart Systems or Palantir work has been transitioned months ago, and we're on track to get it done by the end of the month," Michael told a small group of reporters on Thursday.

[7] Elizabeth Anderson. *Private Government. How Employers Rule Our Lives (and Why We Don't Talk about It)*. Princeton, NJ: Princeton University Press, 2017.

[8] Marc Sageman. *Leaderless Jihad: Terror Networks in the Twenty-First Century*. Philadelphia: University of Pennsylvania Press, 2008. ISBN: 0812240650. DOI: 10.9783/9780812206784; Clark McCauley and Sophia Moskalenko. "Mechanisms of Political Radicalization: Pathways Toward Terrorism". *Terrorism and Political Violence* 20.3 (2008), pp. 415–433. DOI: 10.1080/09546550802073367; Stefan Malthaner and Peter Waldmann. "The Radical Milieu: Conceptualizing the Supportive Social Environment of Terrorist Groups". *Studies in Conflict & Terrorism* 37.12 (2014), pp. 979–998. DOI: 10.1080/1057610X.2014.962441.

floor court, and the council may elect alternates, so the state can't choose which workers get to object.

Annotators get the same structure: a right to refuse a category they judge wrong, and collective bargaining over the taxonomies they apply, not only a route to file a complaint.

10.2 The exit the right depends on

The right to refuse depends on the exit, and the dependence belongs here, where the right is, and not only in the appendix that drafts the exit. Anti-retaliation protection is a remedy: it reaches a dismissal after the fact, through a forum, and the person who refused has to be able to wait for it. A worker whose living ends with the refusal can't, and under capture the forum is the employer's or the state's. Part I's refusers paid for refusing. What makes the right usable the morning after is an offer of work from someone other than the employer, open every day, at a living wage: a jobs guarantee, which is a statute. It is asked for now, for everyone and on its own grounds, and a later chapter makes the case and Appendix C drafts it. The fifth policy is two things, and both are statute. The right, with the council's veto and the arbitration behind it, is codetermination, which in Germany is a creature of statute and not of contract: a works council holds its powers under the Works Constitution Act, not under any agreement with the employer.[9] The exit is the guarantee. A right without the exit is a right to sue, later, for a living already lost.

10.3 Whose voice

Codetermination gives voice to the people who make these systems, and they are not the people the systems act on.[10] So the voice divides. Over the conditions of their work (what they label, what they are exposed to, what taxonomies they apply), the workers decide. Over the uses the work is put to, the affected public that notice organizes comes first.[11]

[9] *Betriebsverfassungsgesetz*. Sept. 25, 2001. URL: https://www.gesetze-im-internet.de/betrvg/. The Works Constitution Act, in the version promulgated 25 September 2001, BGBl. I S. 2518, as amended. Cited for one point: a works council's rights to information, consultation and codetermination are conferred on it by the statute, in every establishment above the size the Act names, and not by any agreement with the employer. The first Act dates from 1952 and the 1972 Act replaced it; the 2001 text is the consolidation of the latter.

[10] A workforce whose livelihood depends on a contract has interests that point toward it, and the Maven history shows staff objecting at one firm and not at the next.

[11] Each deployment publishes the classes of people its outputs name, score, locate or classify, and organizations that represent a class, a legal service provider for people in removal proceedings, say, or a tenants' union for people a screening score ranks, have standing before the arbitration body. They may object to a category of use on their own, and may bring an objection when the works council doesn't.

Chapter 11

A Pipeline Where the People Could Answer

Andry José Hernández Romero is a makeup artist from Venezuela. On 29 August 2024 he presented himself at the San Ysidro port of entry to seek asylum.[1] He was detained while his claim was processed, passed his credible-fear interview, and had, his lawyer said, a strong case.[2] He was held at the Otay Mesa Detention Center, which a private company runs under contract with ICE.[3] There, a company employee screening him flagged two tattoos, crowns above the words for "mom" and "dad," as marks of the Tren de Aragua gang. The employee was a former police officer, and Hernández Romero's lawyers said the government's allegation of gang membership rested on the tattoos and on no other information.[4] On 14 March 2025 the President signed a proclamation invoking the Alien Enemies Act against members of that gang.[5] The next day three flights left Texas for El Salvador, and Hernández Romero was on one of them.[6] He had a hearing on his asylum claim scheduled for later that month. He didn't appear at it, because he was in El Salvador's Terrorism Confinement Center, CECOT, and for weeks his lawyer didn't know where he was. Asked by reporters for the evidence against him,

[1] League of United Latin American Citizens. *Andry Hernández Romero*. The Disappeared. URL: https://lulac.org/thedisappeared/andry_hernandez_romero/. Source for the 29 August 2024 presentation at San Ysidro, detention at Otay Mesa, and the 15 March 2025 removal.

[2] Cecilia Vega et al. *Trump Administration Deports Gay Makeup Artist to Prison in El Salvador*. CBS News (60 Minutes). Apr. 6, 2025. URL: https://www.cbsnews.com/news/venezuelan-migrants-deportations-el-salvador-prison-60-minutes/.

[3] League of United Latin American Citizens, *Andry Hernández Romero*.

[4] Gisselle Palomera. *Discredited Former Cop Played 'Key Role' in Deportation of Gay Make-Up Artist*. Los Angeles Blade. Apr. 15, 2025. URL: https://www.losangelesblade.com/2025/04/15/latest-update-in-the-case-of-wrongfully-deported-gay-venezuelan-make-up-artist/. Reports, citing USA Today, that a private-prison employee who was a former police officer flagged the tattoos, and that the allegation rested on the tattoos and no other information.

[5] *Proclamation 10903: Invocation of the Alien Enemies Act Regarding the Invasion of the United States by Tren de Aragua*. Mar. 14, 2025. URL: https://www.govinfo.gov/content/pkg/FR-2025-03-20/html/2025-04865.htm.

[6] League of United Latin American Citizens, *Andry Hernández Romero*; *J.G.G. v. Trump*. memorandum opinion finding probable cause for criminal contempt No. 1:25-cv-00766-JEB. United States District Court for the District of Columbia, Apr. 16, 2025. URL: https://cases.justia.com/federal/district-courts/district-of-columbia/dcdce/1:2025cv00766/278436/81/0.pdf?ts=1744875687. Vacated (D.C. Cir. Aug. 8, 2025). Cited for the record of the 15 March 2025 oral order and flights.

DHS cited state secrets and ongoing litigation.[7] He spent 125 days in CECOT and was released in a prisoner exchange that sent more than 250 Venezuelans to Venezuela, not back to the country where his claim was pending. His asylum application in Spain is pending.[8]

Nearly every position where a refusal can be defeated appears in that account. A contractor's employee wrote the case description from two tattoos. The determination was a gang-membership designation, not a finding about him reached at any hearing. He had come directly and presented himself, the case Article 31 of the Refugee Convention protects, and his claim to protection was pending, the case the first entry of this chapter's schedule protects. The handoff was to a foreign government's prison, under an arrangement for which the United States paid El Salvador's government about $6 million.[9] On the evening of the flights, a federal judge ordered any plane carrying people removed under the proclamation returned to the United States, and the flights went on.[10] When the remedy came, it was diplomatic. He was released to Venezuela, not returned to the proceeding he had been removed from.

This chapter runs the floor's procedure on an abduction and forcible transfer pipeline, where the people it acts on could, at least in principle, answer; Part IV runs it on a targeting pipeline, where they can't. The name, abduction and forcible transfer, comes from the pipeline's own record. I deliberately avoid calling it a "removal pipeline", since that name connotes a system that might be humane, fair or professional, and no such system exists: in 2025 and 2026 it took people with pending claims, on designations nobody could contest, to a foreign prison without a hearing, and a removal that fails the schedule's first entries is a forcible transfer by its ordinary name.

Hernández Romero could have answered: he had a lawyer, a pending claim and a hearing date. What he lacked was time. The operator moved faster than notice.[11] A pipeline where the people can answer is one

[7] Vega et al., *Trump Administration Deports Gay Makeup Artist to Prison in El Salvador*.

[8] Christopher Wiggins. *Andry Hernández Romero Rebuilds Life after CECOT from Europe*. The Advocate. June 5, 2026. URL: https://www.advocate.com/news/andry-hernandez-romero-spain-asylum.

[9] Nelson Renteria. *Inside Trump's $6mn Deportee Deal with El Salvador Mega-Prison*. Context (Thomson Reuters Foundation). Apr. 11, 2025. URL: https://www.context.news/money-power-people/inside-trumps-6mn-deportee-deal-with-el-salvador-mega-prison.

[10] *J.G.G. v. Trump*.

[11] The Supreme Court held that people designated under the proclamation must receive notice "within a reasonable time and in such a manner as will allow them to actually seek habeas relief" before removal,[12] and later that about a day's notice, with no word of how to contest the removal, was not enough.[13] Both rulings came after he was in CECOT.

[12] *Trump v. J.G.G.*. per curiam No. 24A931. Supreme Court of the United States, Apr. 7, 2025. URL: https://www.supremecourt.gov/opinions/24pdf/24a931_2c83.pdf

[13] *A. A. R. P. v. Trump*. No. 24A1007, 605 U.S. 91 (May 16, 2025) (per curiam). URL: https://www.supremecourt.gov/opinions/24pdf/605us1r31_7k47.pdf. Alien Enemies Act removals. At 94: "We have long held that 'no person shall be' removed from the United States 'without opportunity, at some time, to be heard,'" quoting *The Japanese Immigrant Case*, 189 U.S. 86, 101 (1903). At 95: "In order to 'actually seek habeas relief,' a detainee must have sufficient time and information to reasonably be able to contact counsel, file a petition, and pursue appropriate relief," and notice "roughly 24 hours before removal, devoid of information about how to exercise due process rights to contest that removal, surely does not pass muster."

where the law makes the operator wait for the answer.

So this chapter's instrument is a statute.[14] At the chapter's center is the statute that would end the agency and the seven terms it must carry, written over the acts the agency performs rather than over the agency's name.[15] Amnesty International documented the agency's operations in four cities, and its U.S. section's executive director concluded that "ICE is fundamentally broken and cannot be fixed".[16] I agree, and argue what ending it entails.

11.1 The pipeline

The American abduction and forcible transfer pipeline is assembled from contracts the way Maven was. Immigration and Customs Enforcement's case-management system, the Investigative Case Management system, is Palantir's, under a five-year contract signed in 2022. It filters people by fields that include resident and entry status, criminal affiliation, location and license-plate data, country of origin, race, birthplace and place of employment.[17] In April 2025 ICE paid Palantir about $30 million to extend it into the Immigration Lifecycle Operating System, ImmigrationOS. The contract promised to cut the time spent selecting and apprehending people according to enforcement priorities, to add near real-time visibility into self-deportation, and to manage the "end to end immigration lifecycle from identification to removal".[18] A follow-

[14] The agency that runs the pipeline is statutory, and so are its powers, its means and its money, and what one Congress granted another can withdraw.

[15] The sections before it supply what the statute needs: the pipeline as it was assembled, the acts the statute's schedule forbids, and the positions where those acts move when one route is closed. The sections after it say what a floor can do before the statute passes. Those measures are interim and lapse when the statute takes effect.

[16] Amnesty International. *USA: Amnesty International Calls for ICE to Be Abolished After Documenting Widespread Human Rights Violations in Anti-Immigrant Operations*. Amnesty International. Sept. 24, 2026. URL: https://www.amnesty.org/en/latest/news/2026/09/ee-uu-amnistia-internacional-pide-la-disolucion-del-ice-tras-documentar-violaciones-generalizadas-de-derechos-humanos-en-operaciones-contra-inmigrantes/.

[17] Jason Koebler. *Inside a Powerful Database ICE Uses to Identify and Deport People*. 404 Media. Apr. 2025. URL: https://www.404media.co/inside-a-powerful-database-ice-uses-to-identify-and-deport-people/. Cited for what Investigative Case Management lets a user filter on: "resident status and entry status ('refugee,' 'border crossing card,' 'nonimmigrant alien refused admission,' 'temporary protective status alien,' 'nonimmigrant alien transiting without visa,' 'undocumented alien,'); 'unique physical characteristics (e.g. scars, marks, tattoos)'; 'criminal affiliation'; location data; license plate reader data; country of origin; hair and eye color; race; social security number; birthplace; place of employment; driver's license status; bankruptcy filings, and hundreds more." And for the contract: "In 2022, Palantir signed a $95.9 million, five-year contract to work on ICM.".

[18] Rosemarie Ho. *ICE Just Ordered $30 Million Worth of New Technology from Palantir to Track Immigrants*. Business Insider. Apr. 2025. URL: https://www.yahoo.com/news/ice-just-ordered-30-million-212445164.html. Cited for the ImmigrationOS award and what the contract says it is for. "Immigration and Customs Enforcement has signed a $30 million deal with Palantir for software add-ons to track self-deportations and immigrants who have overstayed their visas." The system is the "Immigration Lifecycle Operating System — or ImmigrationOS." The contract promises to reduce "time and resource expenditure" in selecting and apprehending people according to ICE priorities and to give "near real-time visibility into instances of self-deportation"; alongside "violent criminals" and "affiliates of known transnational criminal organizations," it

DRAFT

on task order renewed it in September 2025.[19] A second Palantir tool, ELITE, puts potential deportation targets on a map, with a dossier on each person and a confidence score for the person's current address. Its addresses come from several sources, among them the Department of Health and Human Services.[20]

In the street, agents identify people with Mobile Fortify, a phone app that captures a face or contactless fingerprints and checks them in real time against the system CBP uses to photograph travelers at the border.[21]

The data come from agencies that collected them for other purposes. In January 2026 Medicaid officials shared data on millions of people with immigration officials, going beyond what a court had allowed, and ICE passed the data to Palantir.[22] ICE also requested the addresses of 1.28 million taxpayers. The request produced 47,289 records before a court stopped it, and the stop was affirmed in September 2026.[23]

---

names visa overstays as a priority. "The agency is awarding Palantir $29.8 million for a prototype to be delivered by September 25." Steven Hubbard. *ICE to Use ImmigrationOS by Palantir, a New AI System, to Track Immigrants' Movements*. American Immigration Council. Aug. 2025. URL: https://www.americanimmigrationcouncil.org/blog/ice-immigrationos-palantir-ai-track-immigrants/. Cited for the three functions and the dates. The functions are given as "Targeting and enforcement prioritization," "Self-deportation tracking," and "Immigration lifecycle management." "Palantir is slated to deliver a prototype of the ImmigrationOS platform by September 25, 2025," with "the contract running through September 2027." The post relies on Business Insider and Biometric Update.

[19] Miles Jamison. *Palantir Lands ICE Contract for ImmigrationOS Support*. ExecutiveGov. Oct. 2025. URL: https://www.executivegov.com/articles/palantir-ice-contract-immigrationos. Cited for the follow-on award: "a $29.9 million task order to continue providing support for the Immigration Lifecycle Operating System," which "provides for the renewal of software licenses, operations and maintenance, or O&M, services and adaptive maintenance support for ImmigrationOS." "The contract, awarded on Sept. 25, was issued under a limited source justification citing Palantir as the sole source."

[20] Joseph Cox. *'ELITE': The Palantir App ICE Uses to Find Neighborhoods to Raid*. 404 Media. Jan. 2026. URL: https://www.404media.co/elite-the-palantir-app-ice-uses-to-find-neighborhoods-to-raid/. Cited for what ELITE (Enhanced Leads Identification & Targeting for Enforcement) does: it "populates a map with potential deportation targets, brings up a dossier on each person, and provides a 'confidence score' on the person's current address," is used "to find locations where lots of people it might detain could be based," and "receives peoples' addresses from the Department of Health and Human Services (HHS) among a range of other sources." The article rests on internal ICE material and sworn testimony from an ICE official.

[21] Joseph Cox. *ICE Is Using a New Facial Recognition App to Identify People, Leaked Emails Show*. 404 Media. June 26, 2025. URL: https://www.404media.co/ice-is-using-a-new-facial-recognition-app-to-identify-people-leaked-emails-show/.

[22] Jude Joffe-Block. *ICE Shared Medicaid Data It Wasn't Supposed to Have with Palantir*. NPR. July 2026. URL: https://www.npr.org/2026/07/17/nx-s1-5898504/ice-medicaid-palantir-data. "After Medicaid officials improperly shared data about millions of people in January with immigration officials, ICE then shared that data with the data analytics firm Palantir." "Palantir operates an app called ELITE that is used by ICE agents to show the addresses of noncitizens who may be subject to deportation." The disclosure came in "a motion filed Thursday by more than 20 Democratic attorneys general"; the 7 January dataset "contained data of millions of people, including those in the country legally."

[23] Tim Shaw. *D.C. Circuit Blocks IRS from Sharing Taxpayer Data with ICE*. Thomson Reuters Checkpoint. Sept. 2026. URL: https://tax.thomsonreuters.com/news/d-c-circuit-blocks-irs-from-sharing-taxpayer-data-with-ice/. Reports *Center for Taxpayer Rights v. IRS*, No. 26-5006 (D.C. Cir. Sept. 8, 2026), for a unanimous panel, affirming the injunction: ICE sought addresses for "1.28 million individuals in its June 2025 request"; the procedure "indisputably contravenes the requirements of section

Leads also come from contractors paid to find people. In late 2025 ICE contracted thirteen companies, in awards that could reach $1.2 billion over two years, to locate people from case data and send back photographs confirming where they live or work.[24] Selection on speech has its own tools. In March 2025 the State Department launched an AI-assisted effort, "Catch and Revoke," to review the social media of student visa holders for apparent support of Hamas.[25] In September 2025 a federal court found that the Secretaries of State and Homeland Security had "acted in concert to misuse the sweeping powers of their respective offices to target noncitizen pro-Palestinians for deportation primarily on account of their First Amendment protected political speech".[26]

The pipeline's last step can be a foreign government. The flights of March 2025 ended in CECOT under the paid arrangement described at the opening of this chapter.[27] In June 2025 the Supreme Court let removals to third countries proceed without the written notice and meaningful chance to raise a torture claim that a district court had required.[28]

Two statements of the ambition are on the record. At the 2025 Border Security Expo, ICE's acting director said the agency needed "to get better at treating this like a business" and wanted a deportation process "like (Amazon) Prime, but with human beings".[29] In 2018 the Justice

6103."

[24] Sam Biddle. *ICE Plans Cash Rewards for Private Bounty Hunters to Locate and Track Immigrants*. The Intercept. Oct. 2025. URL: https://theintercept.com/2025/10/31/ice-plans-cash-rewards-for-private-bounty-hunters-to-locate-and-track-immigrants/. Cited for the lead-verification pipeline as solicited. "Companies hired by ICE will be given bundles of information on 10,000 immigrants at a time to locate, with further assignments provided in 'increments of 10,000 up to 1,000,000.'" Inputs: "case data provided by the government, location data, social media information." Contractors confirm the address with "time-stamped photographs of the location" before reporting to ICE; ICE was "exploring an incentive based pricing structure" with "monetary bonuses." Steven Hubbard. *ICE's Private Bounty Hunters Use AI to Track Immigrants*. American Immigration Council. Apr. 2026. URL: https://www.americanimmigrationcouncil.org/blog/ice-bounty-hunters-use-ai-track-immigrants/. Cited for the awards: "Reporting by Scripps News found that ICE awarded contracts to 13 private companies," "issued in December 2025"; "Each company may receive up to 50,000 cases per month." The contracts are not public.

[25] Marc Caputo. *Scoop: State Dept. to Use AI to Revoke Visas of Foreign Students Who Appear "Pro-Hamas"*. Axios. Mar. 6, 2025. URL: https://www.axios.com/2025/03/06/state-department-ai-revoke-foreign-student-visas-hamas.

[26] *American Association of University Professors v. Rubio*. No. 1:25-cv-10685-WGY. United States District Court for the District of Massachusetts, Sept. 30, 2025. URL: https://www.govinfo.gov/content/pkg/USCOURTS-mad-1_25-cv-10685/pdf/USCOURTS-mad-1_25-cv-10685-3.pdf.

[27] Renteria, *Inside Trump's $6mn Deportee Deal with El Salvador Mega-Prison*.

[28] *Department of Homeland Security v. D.V.D.*. order granting stay No. 24A1153. Supreme Court of the United States, June 23, 2025. URL: https://www.supremecourt.gov/opinions/24pdf/24a1153_l5gm.pdf. Clarified July 3, 2025.

[29] Jerod MacDonald-Evoy. *ICE Director Envisions Amazon-Like Mass Deportation System: 'Prime, but with Human Beings'*. Arizona Mirror. Apr. 8, 2025. URL: https://azmirror.com/2025/04/08/ice-director-envisions-amazon-like-mass-deportation-system-prime-but-with-human-beings/. The original report of Acting ICE Director Todd Lyons's remarks at the 2025 Border Security Expo, Phoenix, 8 April 2025. The quotation is a fragment: "We need to get better at treating this like a business," and a deportation process "like (Amazon) Prime, but with human beings," the parenthesis being the reporter's. Also reports that Lyons hoped artificial intelligence could help "free up bed space" and "fill up airplanes." Bloomberg (9 April 2025) and the AP (18 April 2025) print longer versions of the Prime remark that differ from each other and from this one. At a House Homeland Security Committee hearing on 10 February 2026

Department made 700 completed cases a year a condition of a satisfactory rating for immigration judges.[30]

What a case description looks like here, and who writes it, is on the record in a way Maven's never was. The charging document, the Notice to Appear, has to state the acts alleged, the charges and the statutory provisions,[31] and any of a long list of immigration officers may issue one.[32] The government once conceded that almost every notice it issued over three years omitted the hearing's time and date.[33] The account of the person comes from the arresting officer's narrative on Form I-213. Agents routinely complete it after interviewing the person they arrested; it is presumed reliable unless that same arrested person produces evidence to the contrary, and the officer who made the arrest and authored the narrative rarely has to appear to be cross-examined.[34]

Lyons acknowledged the remark and said it had been taken out of context.

[30] American Immigration Lawyers Association. *EOIR Issues Guidance Implementing Immigration Judge Performance Metrics*. Mar. 30, 2018. URL: https://www.aila.org/library/eoir-memo-immigration-judge-performance-metrics. Cited for the case-completion standard the Executive Office for Immigration Review (EOIR), the Justice Department component that houses the immigration courts, set for individual immigration judges in 2018. AILA's summary of the EOIR memorandum of 30 March 2018: "Memo states that new metrics will be added to the current immigration judge Performance Work Plan at Job Element 3: Accountability for Organizational Results. Goals will be measured annually and immigration judges will need to complete 700 cases per year, have a remand rate of less than 15%, and meet at least half of additionally outlined benchmarks, to earn a 'satisfactory performance' rating," effective 1 October 2018. The ABA Journal (Lorelei Laird, "Justice Department imposes quotas on immigration judges, provoking independence concerns," 2 April 2018) reports the metrics were announced "in an email from the Executive Office of Immigration Review" by Director James McHenry. Status: suspended 19 October 2021 by an email from the Chief Immigration Judge, as reported by Government Executive (Erich Wagner, "Biden Admin. Suspends Immigration Judge Quotas, Prompting Similar Requests Elsewhere," 26 October 2021, https://www.govexec.com/workforce/2021/10/biden-admin-suspends-immigration-judge-quotas-prompting-similar-requests-elsewhere/186396/). EOIR Policy Memorandum 25-47 of 12 September 2025 adopted court-level performance measures; the Immigration Policy Tracking Project summarizes it as saying "EOIR is not reinstating individualized performance measures at this time."

[31] United States Congress. *Initiation of Removal Proceedings; 8 U.S.C. § 1229*. United States Code. URL: https://www.law.cornell.edu/uscode/text/8/1229. Cited for what a Notice to Appear must state. Subsection (a)(1) requires written notice specifying, among other things, "(C) The acts or conduct alleged to be in violation of law.", "(D) The charges against the alien and the statutory provisions alleged to have been violated.", and "(G)(i) The time and place at which the proceedings will be held."

[32] U.S. Department of Homeland Security. *Notice to Appear; 8 C.F.R. § 239.1*. Code of Federal Regulations. URL: https://www.law.cornell.edu/cfr/text/8/239.1. Cited for who issues the charging document. Paragraph (a): "Any immigration officer, or supervisor thereof, performing an inspection of an arriving alien at a port-of-entry may issue a notice to appear to such alien," followed by a long list of further officer titles, among them supervisory deportation officers and supervisory border patrol agents.

[33] *Pereira v. Sessions*. 585 U.S. 198 (2018). URL: https://www.law.cornell.edu/supremecourt/text/17-459. Cited for the notice actually given: DHS "almost always serves noncitizens with notices that fail to specify the time, place, or date of initial removal hearings whenever the agency deems it impracticable to include such information," citing the "Government's admission that 'almost 100 percent' of 'notices to appear omit the time and date of the proceeding over the last three years'"; and for the holding that such a document "is not a 'notice to appear under section 1229(a).'"

[34] *Cruz Espinoza v. Immigration and Naturalization Service*. 45 F.3d 308 (9th Cir. 1995). URL: https://law.resource.org/pub/us/case/reporter/F3/045/45.F3d.308.94-70094.html. Affirmed. Cited for the Form I-213 as an officer's narrative and its evidentiary weight: a form "which border agents routinely complete after interviewing

The Alien Enemies Act removals had a case description of their own: a validation guide that scored people in categories including tattoos and dress. Anyone scoring eight points or more was validated as a member of the gang, and a score of six or seven could still validate someone, after the officer consulted a supervisor and ICE's own lawyers.[35] The dossiers and confidence scores of the newer tools have no named author at all; they are assembled from database fields. The validation guide had authors, a points table and a threshold, which made it a score with a rubric attached. At Minab the case description was a target coding nobody outside could see. Here it is an officer's narrative, a set of fields, a score and a points table, all of which exist as documents a person could be shown.

11.2 The schedule

The removal schedule, Table A.2 in Appendix A, says for an abduction and forcible transfer pipeline what Table A.1 says for targeting: what the instruments yield, and what was considered and rejected. It is also the schedule of the statute below.[36]

The schedule has fourteen entries. Don't take part in removing anyone whose claim to protection hasn't been finally decided, or to a place where they face persecution or torture, or into a foreign government's custody without charge or contact, whatever that government assures. Don't remove anyone who hasn't been asked, in a language they understand, whether they fear return. Don't remove anyone from a country that is their own, long-term residents included; don't separate a parent from a minor child; and don't detain a child for immigration purposes, alone or with family. Don't take part in detaining or removing anyone unless an official has decided that person's own case on its facts: an individual determination, not a score, a points table or a designation. Don't take part in force beyond what an arrest strictly needs, and don't

aliens"; "essentially a recorded recollection of a[n INS agent's] conversation with the alien" (quoting Bustos-Torres v. INS, 898 F.2d 1053, 1056 (5th Cir. 1990)); "We agree with the BIA that information on an authenticated immigration form is presumed to be reliable in the absence of evidence to the contrary presented by the alien"; and "The immigration judge was not required to permit cross-examination of the form's preparer in this case." *Immigration and Naturalization Service v. Lopez-Mendoza*. 468 U.S. 1032 (1984). URL: https://www.law.cornell.edu/supremecourt/text/468/1032. Cited for who writes the case and who does not appear: "At present an officer simply completes a 'Record of Deportable Alien' that is introduced to prove the INS's case at the deportation hearing; the officer rarely must attend the hearing. ... A single agent may arrest many illegal aliens every day."

[35] Sergio Martínez-Beltrán. *Advocates Say Flawed 'Checklist' Targets Venezuelans for Deportation under Archaic Wartime Act*. NPR. Mar. 31, 2025. URL: https://www.vpm.org/npr-news/2025-03-31/advocates-say-flawed-checklist-targets-venezuelans-for-deportation-under-archaic-wartime-act/. Describes the "Alien Enemies Act: Alien Enemy Validation Guide" filed by the ACLU..

[36] The floor took the instruments entire so that any omission would show. The entries below come from running that test against what the 2025–26 operations did.[37]

[37] Amnesty International. *"We Had Whistles, They Had Guns": Human Rights Violations in U.S. Immigration Enforcement Operations and the Case to Abolish ICE*. Amnesty International, Sept. 24, 2026. URL: https://www.amnestyusa.org/reports/we-had-whistles-they-had-guns-human-rights-violations-in-u-s-immigration-enforcement-operations-and-the-case-to-abolish-ice/

mark anyone as dangerous on a designation they haven't been able to contest. Don't hold anyone in cruel conditions, incommunicado, or out of reach of counsel and family, and don't penalize a refugee who came directly and presented themselves. Don't select anyone on race, ethnicity, religion or national origin or their proxies, on their opinions or speech, or for observing or recording enforcement; don't identify people by their faces in public places; and don't use data collected to provide health care, collect taxes, educate or deliver social services to find anyone. Each entry, with what was considered and rejected and why, is in Table A.2.

These terms cover most removals now under way. They don't cover every removal.[38] That most of what the agency now does fails these terms is the case for ending the agency, not reforming it: held to the terms, it would have little left to do. Two entries go further than the instruments require on any settled reading, and so are departures, held to the higher bar the floor sets for one: the bar on removing long-term residents from a country that is their own, and the bar on detaining children for immigration purposes. Table A.2 gives the argument for each.

Several entries answer something specific in the record. The force entry reaches a model because the pipeline's outputs set how agents approach a door. A dossier field that codes someone as gang-affiliated is securitization in one line, the person in need described as the person to fear. Amnesty documented killings by federal agents during these operations, some of which it says may amount to extrajudicial executions, and detention conditions it says should be investigated as torture.[39]

The race entry names proxies because of what happened in Los Angeles. A district court had barred immigration stops there based on apparent race or ethnicity, speaking Spanish or accented English, location and type of work, and in September 2025 the Supreme Court stayed that order.[40] An entry that named race alone would allow the combination the order had barred.

The observers' entry protects the record this chapter relies on. Amnesty's report takes its title from them, *We Had Whistles, They Had Guns*. It found that video taken by rapid responders and community members was critical to establishing what happened in several of the most serious incidents.[41] A pipeline that can be pointed at the people keeping the record will be, because the people running the pipeline know that there will be consequences for them if what they are doing is accurately documented. Amnesty asks the government to end unlawful surveillance and the use of facial recognition for identification, and to protect the rights to peaceful assembly, expression and association.[42]

The last entry, the firewall, rests on privacy and equality, which is

[38] A person who does not fear return, and who has no protection claim and no tie to the country, could still be removed after an individual determination.

[39] Amnesty International, *"We Had Whistles, They Had Guns": Human Rights Violations in U.S. Immigration Enforcement Operations and the Case to Abolish ICE*.

[40] *Noem v. Vasquez Perdomo*. order granting stay No. 25A169. Supreme Court of the United States, Sept. 8, 2025. URL: https://www.supremecourt.gov/opinions/24pdf/25a169_5h25.pdf.

[41] Amnesty International, *"We Had Whistles, They Had Guns": Human Rights Violations in U.S. Immigration Enforcement Operations and the Case to Abolish ICE*.

[42] Amnesty International, *"We Had Whistles, They Had Guns": Human Rights Violations in U.S. Immigration Enforcement Operations and the Case to Abolish ICE*.

the ground the floor's instruments supply. People who fear that a clinic visit, a tax return or a school enrollment will be used to find them stay away, and what they lose is health care, education and income. Those are economic and social rights, which the floor leaves out. The entry belongs on the floor because it protects the floor's rights. It belongs in the statute because it also protects the others.

11.3 Where the acts move

Table A.3, in Appendix A, runs the nine positions on this pipeline, position by position.

The positions that failed at Minab, the case description and review, are the ones this pipeline has documented most fully. The documents show both failing by design rather than by accident: a risk tool with its release option removed, a points table that made a tattoo into membership, and a review that need not occur unless the person knows to ask for it. The abduction and forcible transfer pipeline adds a failure Minab did not show: a halt ordered in time and contemptuously ignored.

11.4 The statute

The power to remove is statutory, but so are the agency that exercises it, the means it uses and the money it spends, and the body that granted each can withdraw it.[43]

So the removal counterpart of the domestic clause puts two questions to the legislature. The first is whether it has authorized this agency, by these means, at this scale. The second is whether the statute that ends the agency carries the floor into whatever receives its functions.[46]

[43] Congress has done this once. The Homeland Security Act of 2002 abolished the Immigration and Naturalization Service once its functions had been transferred. It divided those functions between two bureaus and barred the executive from using its reorganization authority to recombine them.[44] That was a separation of offices written into statute. The enforcement bureau became the Bureau of Immigration and Customs Enforcement under a reorganization plan that took effect on 1 March 2003.[45]

[44] *Homeland Security Act of 2002*. Pub. L. No. 107-296, 116 Stat. 2135. Nov. 25, 2002. URL: https://www.law.cornell.edu/uscode/text/6/291. §471 (abolishment of INS; bar on recombining the two bureaus), 116 Stat. 2205, codified at 6 U.S.C. §291. §§442, 451, 471

[45] *Reorganization Plan Modification for the Department of Homeland Security*. H.R. Doc. No. 108-32, 108th Cong., 1st Sess. Jan. 30, 2003. URL: https://www.law.cornell.edu/uscode/text/6/542. Renamed the Bureau of Border Security the Bureau of Immigration and Customs Enforcement. Set out as a note under 6 U.S.C. §542.

[46] The precedent is also the warning. The 2002 Act ended one immigration agency and rebuilt its enforcement half inside a department organized around security. Amnesty International traces ICE to the aftermath of 11 September and to "an extremely problematic security framework" adopted in the years that followed.[47] It now asks Congress to defund ICE and rescind its current funding, and asks House members to cosponsor the Melt ICE Act as "a crucial first step".[48] However, starting over without a floor produced ICE.

[47] Amnesty International, *USA: Amnesty International Calls for ICE to Be Abolished After Documenting Widespread Human Rights Violations in Anti-Immigrant Operations*

[48] Amnesty International USA. *An Open Letter to Congress: Abolish ICE!*. Amnesty International USA. Sept. 24, 2026. URL: https://www.amnestyusa.org/blog/an-open-letter-to-congress-abolish-ice/

Two bills in the current Congress answer the first question. The Abolish ICE Act ends the agency by name.[49] The Melt ICE Act works through its powers: it releases everyone held in DHS detention and bars federal funds for detention and monitoring.[50] Two further drafts reach the schedule's bar on identifying people by their faces. None can pass a Congress that in June 2026 voted ICE and CBP $70 billion more,[51] and since 2025 most of the pipeline's money has come by reconciliation and stays available through fiscal 2029, past the reach of next year's appropriations bill.[52] A Congress with the votes to end the agency will find the text already written. Appendix A says what each bill does, clause by clause, and where the money sits.

11.4.1 Acts and agencies

Read against the positions where the acts move, the Melt ICE Act is the nearest thing on the record to the floor for the abduction and forcible transfer pipeline, enacted as statute. It closes positions no vendor term could reach, and Table A.4, in Appendix A, shows which.

The table's right-hand column, what the bill leaves open, has one pattern. Where the bill is written over an act ("no Federal funds may be used with respect to immigration detention and monitoring programs"), it reaches every route, because the act is the same whoever performs it and whichever account pays. Where it is written over an agency or an account (the funds provided to ICE for operations and support), the act can move next door.[53] The statute this chapter proposes is written the way the floor is, over acts and not over particular entities. Drafting of that kind is necessary and not sufficient, as Congress has learned before.

The 1984 Boland Amendment barred funds available to the CIA, the Defense Department "or any other agency or entity of the United States involved in intelligence activities" from supporting military operations in Nicaragua.[54] The National Security Council staff ran the program anyway. For sixteen months it used money from third countries, private donors and arms sales to Iran to carry out what the investigating

[49] Shri Thanedar. *Abolish ICE Act*. H.R. 7123, 119th Cong., 2d Sess. Jan. 15, 2026. URL: https://www.congress.gov/119/bills/hr7123/BILLS-119hr7123ih.pdf.

[50] Delia C. Ramirez. *To End Detention and Electronic Monitoring, and Redirect Funding to Community-Based Wrap-Around Services* [*called the Melt ICE Act by its sponsor*]. H.R. 7190, 119th Cong., 2d Sess. Jan. 21, 2026. URL: https://www.govinfo.gov/content/pkg/BILLS-119hr7190ih/html/BILLS-119hr7190ih.htm.

[51] Luna Ma. *Congress Passes $70 Billion Immigration Enforcement Funding Law*. Inside Business Immigration. June 18, 2026. URL: https://www.gtlaw-insidebusinessimmigration.com/immigration-and-customs-enforcement-ice/congress-passes-70-billion-immigration-enforcement-funding-law/.

[52] *An Act to Provide for Reconciliation Pursuant to Title II of H. Con. Res. 14* [*popularly the "One Big Beautiful Bill Act"*]. Pub. L. No. 119-21, 139 Stat. 72. July 4, 2025. URL: https://www.govinfo.gov/content/pkg/PLAW-119publ21/pdf/PLAW-119publ21.pdf. Title IX, subtitle A, §90003 (detention capacity, $45,000,000,000), 139 Stat. 358–59.

[53] The two biometric drafts make the same choice in miniature. ICE Out of Our Faces is written over two agencies and leaves every other federal agency free to identify people by their faces. The facial-recognition moratorium is written over the act, by every federal entity, and reaches state and local police through their grants.

[54] *Department of Defense Appropriation Act, 1985, §8066(a)* [*Boland Amendment*]. Pub. L. No. 98-473, §101(h), 98 Stat. 1837, 1935. Oct. 12, 1984. URL: https://www.gpo.gov/fdsys/pkg/STATUTE-98/pdf/STATUTE-98-Pg1837.pdf. Enacted in the continuing appropriations resolution for fiscal year 1985. §8066(a).

committees called a program Congress believed it had prohibited.[55] It did so in secret, not on a reading of the text: the committees found the amendments "violated in letter and spirit," and concluded that the affair "resulted from the failure of individuals to observe the law, not from deficiencies in existing law".[56] Nothing inside the government stopped it. Detection came from outside the operation in two ways: a supply plane was shot down over Nicaragua on 5 October 1986, and investigators found a memorandum that had escaped the shredder.[57] The committees still recommended one change of drafting, writing the next rule over the act: a presidential finding before any department, agency or entity of the government begins a covert action, "regardless of what source of funds is used".[58] A rule written that way leaves an executive less room to claim afterward that it was never covered. Against one willing to break it in secret, what is left is the record.

The abduction and forcible transfer pipeline has already shown where its acts move. In the eighteen months to July 2026, ICE held people in three places outside its ordinary contracts:[59]

- an Army base, under a contract the Army awarded;
- eight Bureau of Prisons facilities, under an interagency agreement;
- a state-run facility for which ICE had no contract at all. DHS reimbursed the state through a FEMA grant program built from funds appropriated for sheltering migrants, and ICE cited a county's 287(g) agreement as its legal basis.

Over the same period the number of facilities ICE was authorized to use roughly doubled, from 134 to 272.[60] A bar written over ICE's detention contracts would have caught none of these three arrangements as they began. The Melt ICE Act's bar on all federal funds for detention would have caught all three.

[55] U.S. House Select Committee to Investigate Covert Arms Transactions with Iran and U.S. Senate Select Committee on Secret Military Assistance to Iran and the Nicaraguan Opposition. *Report of the Congressional Committees Investigating the Iran-Contra Affair, with Supplemental, Minority, and Additional Views*. H.R. Rep. No. 100-433; S. Rep. No. 100-216. Washington, DC: U.S. Government Printing Office, Nov. 1987. URL: https://www.govinfo.gov/app/details/SERIALSET-13810_00_00-002-0433-0000.

[56] U.S. House Select Committee to Investigate Covert Arms Transactions with Iran and U.S. Senate Select Committee on Secret Military Assistance to Iran and the Nicaraguan Opposition, *Report of the Congressional Committees Investigating the Iran-Contra Affair, with Supplemental, Minority, and Additional Views*, pp. 344, 362.

[57] U.S. House Select Committee to Investigate Covert Arms Transactions with Iran and U.S. Senate Select Committee on Secret Military Assistance to Iran and the Nicaraguan Opposition, *Report of the Congressional Committees Investigating the Iran-Contra Affair, with Supplemental, Minority, and Additional Views*.

[58] U.S. House Select Committee to Investigate Covert Arms Transactions with Iran and U.S. Senate Select Committee on Secret Military Assistance to Iran and the Nicaraguan Opposition, *Report of the Congressional Committees Investigating the Iran-Contra Affair, with Supplemental, Minority, and Additional Views*, p. 363.

[59] U.S. Government Accountability Office. *Immigration Detention: Urgent Planning Needed to Avoid Further Waste of Taxpayer Dollars*. Report to congressional requesters GAO-26-108663. U.S. Government Accountability Office, Sept. 24, 2026. URL: https://www.gao.gov/assets/gao-26-108663.pdf.

[60] U.S. Government Accountability Office, *Immigration Detention: Urgent Planning Needed to Avoid Further Waste of Taxpayer Dollars*.

People were held in a fourth place: a foreign government's prison, under the paid arrangement with which this chapter opened.[61] Whether either bar would have caught it is doubtful, since a person held abroad after removal is arguably no longer in immigration detention. A bar written over the act of holding people the United States has removed, wherever and by whomever, would have caught it.

11.4.2 The statute under the three adversaries

Run the statute under each of the three:

- **An executive willing to carry it out.** The statute prevents: the agency ends and the acts in the schedule stop.
- **A captured operator.** The statute binds on paper and raises costs.[62]
- **Total capture.** The unenacted bill is itself a record of who was asked to end the agency and who signed.

11.4.3 What the statute must carry

For the statute to start over rather than rename, it should carry seven terms that neither abolition bill yet contains in full.

First, the schedule. Table A.2's fourteen entries are enacted as limitations on all federal funds, binding every agency, contractor and grantee, in the form the Melt ICE Act already uses for detention.[66]

[61] Renteria, *Inside Trump's $6mn Deportee Deal with El Salvador Mega-Prison*.

[62] Funds limitations are law, but the operator can break one and defend it afterward by reading the account's boundary narrowly, as the committees' minority read Boland's.[63] It can route the act to an agency the statute does not name, and it can spend money appropriated before the statute passed. What can survive is the record, but it matters who keeps it. The Iran-Contra committees could not settle the President's role because documents had been shredded and a principal witness had died.[64] In the 2025–26 enforcement operations, by contrast, Amnesty found that video taken by rapid responders and community members proved critical, in several of the most serious incidents, to establishing what happened and challenging official accounts.[65] The record was held by neighbors with phones, which is why the schedule protects them.

[63] U.S. House Select Committee to Investigate Covert Arms Transactions with Iran and U.S. Senate Select Committee on Secret Military Assistance to Iran and the Nicaraguan Opposition, *Report of the Congressional Committees Investigating the Iran-Contra Affair, with Supplemental, Minority, and Additional Views*, p. 418

[64] U.S. House Select Committee to Investigate Covert Arms Transactions with Iran and U.S. Senate Select Committee on Secret Military Assistance to Iran and the Nicaraguan Opposition, *Report of the Congressional Committees Investigating the Iran-Contra Affair, with Supplemental, Minority, and Additional Views*

[65] Amnesty International, *"We Had Whistles, They Had Guns": Human Rights Violations in U.S. Immigration Enforcement Operations and the Case to Abolish ICE*

[66] Written that way, Border Patrol, the Bureau of Prisons, a FEMA grant and a payment to a foreign government's prison are covered because the act is. The biometric entry needs no new drafting. The moratorium's bar on every federal entity is already in the form the schedule takes.[67]

[67] Office of Rep. Pramila Jayapal. *Reps. Jayapal, Tlaib, Pressley and Sens. Markey, Merkley Reintroduce Legislation to Halt Government Use of Facial Recognition and Other Biometric Technology*. Sept. 25, 2026. URL: https://jayapal.house.gov/2026/09/25/reps-jayapal-tlaib-pressley-and-sens-markey-merkley-reintroduce-legislation-to-halt-government-use-of-facial-recognition-and-other-biometric-technology/

DRAFT

Second, succession and separation. Any office that receives a transferred function inherits the limitations with it. Following section 471(b) of the 2002 Act, no reorganization may recombine in one office the power to arrest, the power to detain, custody of the data used to select people, and adjudication of status.[68]

Third, counsel, screening and the stay. Five provisions make the operator wait for the answer:

- Anyone facing detention or removal has counsel at government expense from the first encounter. The Immigration and Nationality Act grants representation only "at no expense to the Government",[70] and the statute repeals that clause and replaces it with "at market expense to the Government."
- Anyone the government proposes to remove is asked, in a language they understand, whether they fear return, and told how to claim protection, before any order issues.
- Notice of a proposed removal, or a contest of one, stays the removal until the contest is decided. The stay attaches by operation of law, not at a court's discretion, so no flight can leave while an order is being written.
- No detained person is transferred out of reach of counsel while a contest is pending.
- A removal carried out in breach of a stay or a court order violates the schedule, and return under the seventh term is mandatory.

Representation is the largest single difference in how these cases end. In a national study of more than a million removal cases decided from 2007 to 2012, 14 percent of detained people had a lawyer. Detained people who had one were ten and a half times as likely to succeed as those who didn't.[71] The floor's instruments require that a person lawfully in the country who faces expulsion be allowed to be represented, not that representation be paid for, so this term goes beyond them.

The third term is written against the record that opens this chapter, where the Supreme Court's holdings on notice came after the March flights. In June 2025 it stayed a district court's order requiring written notice and a meaningful chance to raise a torture claim before removal to a third country.[72] The district court later held the policy unlawful, the

[68] The adjudicator sits outside the department that prosecutes. At present the Board of Immigration Appeals sits in the Justice Department, its members act as the Attorney General's delegates, and the Attorney General may review and replace their decisions.[69]

[69] *Organization, Jurisdiction, and Powers of the Board of Immigration Appeals*. 8 C.F.R. §1003.1. URL: https://www.ecfr.gov/current/title-8/chapter-V/subchapter-A/part-1003/subpart-A/section-1003.1. Para. (a)(1) (Board members as the Attorney General's delegates); para. (h) (referral of cases to the Attorney General).

[70] *8 U.S.C. § 1362: Right to Counsel*. URL: https://www.law.cornell.edu/uscode/text/8/1362. "...the person concerned shall have the privilege of being represented (at no expense to the Government) by such counsel ..."

[71] Ingrid Eagly and Steven Shafer. *Access to Counsel in Immigration Court*. Special report. American Immigration Council, Sept. 28, 2016. URL: https://www.americanimmigrationcouncil.org/report/access-counsel-immigration-court/. Based on Eagly and Shafer, "A National Study of Access to Counsel in Immigration Court," *University of Pennsylvania Law Review* 164 (2015): 1.

[72] *Department of Homeland Security v. D.V.D.*.

First Circuit largely affirmed in September 2026, and the government has asked the Supreme Court to stay that judgment as well.[73] A right to notice that depends on a court's remedy, when that remedy can be stayed or outrun, mostly raises costs and leaves a record. The stay by operation of law moves the waiting from the court's order into the statute.

Fourth, the firewall. The Melt ICE Act bars its own grantees from passing the personal information of the people they serve to any federal entity, and the statute extends that rule to every federal program. Data collected to provide health care, collect taxes, educate or deliver social services may not be used to identify, locate or select anyone for immigration enforcement.[74]

Fifth, the pipeline. The contract bar is extended from detention and monitoring to the acts of the schedule, wherever a system performs them:

- selection on protected characteristics or their proxies;
- use of firewalled data;
- location by bounty;
- scores, points tables or designations that stand in for an individual determination;
- identification by face or other biometrics in public places;
- screening of speech for grounds of removal;

[73] *Application for a Stay, Department of Homeland Security v. D.V.D.*. Sept. 24, 2026. URL: https://www.supremecourt.gov/DocketPDF/26/26A406/425583/20260924155624768_DVD%20stay%20Sept%202026%20FILE%20corrected.pdf. No. 26A406 (U.S. filed Sept. 24, 2026). Recites the district court's final judgment (Feb. 2026) and the First Circuit's affirmance (Sept. 18, 2026).

[74] This is the firewall the Council of Europe's anti-racism commission recommended a decade ago.[75] The Medicaid and IRS transfers described above are the cases it would have stopped.[76] The firewall also covers the answer. Nothing a person submits in response to notice, or in contesting a determination, may be used to locate or select them or anyone named in it. Nor may anything held on a person's own device, or in a tool that serves them.

[75] European Commission against Racism and Intolerance. *ECRI General Policy Recommendation No. 16 on Safeguarding Irregularly Present Migrants from Discrimination*. CRI(2016)16. Council of Europe, Mar. 16, 2016. URL: https://rm.coe.int/ecri-general-policy-recommendation-no-16-on-safeguarding-irregularly-p/16808b5b0b

[76] Joffe-Block, *ICE Shared Medicaid Data It Wasn't Supposed to Have with Palantir*; Shaw, *D.C. Circuit Blocks IRS from Sharing Taxpayer Data with ICE*

DRAFT

- identification or tracking of observers.[77]

Sixth, the record. Before abolition takes effect, ICE's records pass to a holder adverse to the operator, under a duty to preserve them and to give access to investigators and to the people they concern.[80]

Seventh, remedy. The first six terms prevent and preserve. A floor's fourth job is remedy, and the statute owes it to the people already harmed. It would do so in five ways:

- Anyone removed in violation of the schedule or of a court order has a right of return at government expense, and their proceedings resume where they stood.
- Families separated by removal are reunited at government expense.
- People harmed by acts in the schedule have a cause of action for damages that sovereign immunity does not bar.
- The floor court, or a district court until it exists, decides claims under this term at first instance, outside the office that receives the agency's functions and outside the department that prosecutes,

[77] That could reach the case-management, ImmigrationOS and ELITE contracts, the skip-tracing awards, Mobile Fortify and the speech screening described above.[78] It would do so without denying a successor the records it needs to make an individual determination.

The bar reaches monitoring as surveillance, not support. The Melt ICE Act's HHS grant program funds services for people affected by enforcement, delivered by organizations that have never taken part in immigration or law enforcement and that may not surveil the people they serve or pass their personal information to any federal entity.[79] I would keep that line. It is drawn on what an organization has done, not on what it says, the line chapter 14 draws for the floor's offices. Voluntary case management, legal orientation and help keeping hearing dates are support, not a monitoring program, when the person can decline them and whoever provides them may not report to enforcement.

[78] Koebler, *Inside a Powerful Database ICE Uses to Identify and Deport People*; Ho, *ICE Just Ordered $30 Million Worth of New Technology from Palantir to Track Immigrants*; Cox, *'ELITE': The Palantir App ICE Uses to Find Neighborhoods to Raid*; Biddle, *ICE Plans Cash Rewards for Private Bounty Hunters to Locate and Track Immigrants*; Cox, *ICE Is Using a New Facial Recognition App to Identify People, Leaked Emails Show*; Caputo, *Scoop: State Dept. to Use AI to Revoke Visas of Foreign Students Who Appear "Pro-Hamas"*

[79] Ramirez, *To End Detention and Electronic Monitoring, and Redirect Funding to Community-Based Wrap-Around Services* [*called the Melt ICE Act by its sponsor*]

[80] The records include case files, the pipeline's logs, scores and model versions, validation worksheets, contractor data, flight manifests, the terms of any arrangement with a foreign government to hold people removed, and body-camera and use-of-force records. Amnesty asks for prompt, independent investigation of killings by federal agents and of detention conditions it says may amount to torture.[81] The last weeks of an operation are when its records are most at risk. In November 1986, once the Attorney General began gathering the facts of the Iran arms sales, North and Poindexter shredded and altered official documents, North's secretary carried classified papers out of the White House in her clothing, and Poindexter destroyed a finding the President had signed.[82] An agency told it will be abolished has the same weeks and the same shredders, which is why its records pass to the adverse holder before abolition takes effect, not after.

[81] Amnesty International, *"We Had Whistles, They Had Guns": Human Rights Violations in U.S. Immigration Enforcement Operations and the Case to Abolish ICE*

[82] U.S. House Select Committee to Investigate Covert Arms Transactions with Iran and U.S. Senate Select Committee on Secret Military Assistance to Iran and the Nicaraguan Opposition, *Report of the Congressional Committees Investigating the Iran-Contra Affair, with Supplemental, Minority, and Additional Views*, pp. 20, 23

with appeal to the Supreme Court's immigration division (Appendix D). Its finding that a removal violated the schedule is itself the order of return: the office that took over the agency's removal work carries it out, and nothing waits on that office agreeing.

- A commission outside both departments, with subpoena power and the records the sixth term preserves, investigates killings by federal agents and detention conditions during the agency's operations, and reports to the floor court and the public.[83]

With these terms the statute is the domestic clause's counterpart, and Table A.2 is its schedule.

11.5 Before the statute: the auto-proceed class

Until the statute passes, the pipeline runs. This section and the three after it describe what a floor can do meanwhile. Each measure I propose in the nearby sections lapses when the statute takes effect.

The removal terms say a determination made at a rate no adjudicator could sustain didn't occur. The review ratio's sorting rule carries over to removal, though not the ratio itself, and here the sorting has a direction. The floor makes acting on a person require more than declining to act, and in an abduction and forcible transfer pipeline the act is adverse: a charging document, a detention, a location, a removal. So a case may auto-proceed only toward liberty, such as release on recognizance, termination of proceedings, return of documents, or a grant or renewal of status. No adverse act is ever in an auto-proceed class.

Before operating, the deployment pre-registers the liberty classes, the thresholds that assign cases to them, the evidence the sorting may rely on, and the expected share of each. For adverse determinations it pre-registers something else: for each kind of determination, the minimum time below which the determination is taken not to have occurred. The floor court sets that minimum, not the agency.[86]

Then the determinations are sampled. Reviewers appointed by the floor court, and until it exists by the court that has the case, as a special

[83] Amnesty asks for exactly this: prompt, effective, independent and impartial investigations into human rights violations by federal agents, and accountability for those responsible.[84]

Remedy that depends on the operator's cooperation is weak in the way the record shows. When the government admitted that it had removed Kilmar Abrego Garcia to El Salvador in error, the Supreme Court required it to "facilitate" his release.[85] Hernández Romero's release came through a prisoner exchange, to Venezuela, and not to the proceeding he had been removed from. A right of return is the seventh term, and what makes it a right is that the finding orders the return itself, where "facilitate" left the government to decide what to do.

[84] Amnesty International, *"We Had Whistles, They Had Guns": Human Rights Violations in U.S. Immigration Enforcement Operations and the Case to Abolish ICE*

[85] *Noem v. Abrego Garcia*. No. 24A949. Supreme Court of the United States, Apr. 10, 2025. URL: https://www.supremecourt.gov/opinions/24pdf/24a949_lkhn.pdf

[86] A quota of 700 cases a year is about three a working day. Whether three a day leaves a judge enough time to decide an asylum claim is then settled before any case is heard, by a court, and written down where anyone can check it. Otherwise the agency settles it afterward, by meeting the number. A validation guide that turns a tattoo into points is a determination made in no time at all, and Table A.2's individual-determination entry says it didn't occur.

master or monitor, none of whom produced the record, re-adjudicate a sample of adverse determinations, weighted toward those made below the minimum, against evidence the agency didn't compose, and the error rate is published. When a kind of determination's sampled error rate exceeds its published bound, that kind is suspended until the bound is met, and everyone it was applied to is notified.[87]

11.6 Notice that can't be turned on the person

In a targeting pipeline notice reduces to a class and a count published afterward. Here the person can be named, and notice can do both of its jobs, but only if it is built so that it can't be used against the person it reaches. The starting model is consumer credit's adverse-action notice: the person a compliance names, scores, locates or classifies is told what was done, on what data, and how to respond, with a right to contest that doesn't depend on giving an account of the loss.

In an abduction and forcible transfer pipeline that model has three hazards. A notice that says *you have been located and scored* functions as a threat and a push to leave, and the pipeline's own contract counts leaving as an output: ImmigrationOS promised near real-time visibility into self-deportation.[88] A contest asks the person to give the agency an address and an account. And people who complain about what a system did to them are exposed to reprisal by the operator they complain about. So notice here carries four conditions:

- It goes through counsel or an accredited representative where the person has one, and offers one where the person doesn't.
- It states the stay: that contesting stops the act until the contest is decided, and what the person may do in the meantime.
- Nothing submitted in answer to it, or in a contest, may be used to locate or select the person or anyone named in it. The contest goes to counsel and the floor court under a key the agency doesn't hold, and the person proves they are the one noticed without revealing where they are, a proof in zero knowledge; the agency learns that the notice was contested and nothing that would find the person.
- An enforcement action against a person within a set period after they contest is presumed to be reprisal, and the agency bears the burden of showing it isn't.

Until the statute carries these conditions, a deployment that holds

[87] The liberty classes are sampled too, so that their bounds are honest. An error there releases someone who should have been held for a hearing, and the hearing can still be held. Unlike Maven's, this pipeline's errors can be found, because the people they fell on are alive, can be located and can say what happened. Sampling finds the errors the people couldn't report. Counsel at government expense, and a stay that holds the removal while it is contested, are what let them report the rest.

[88] Ho, *ICE Just Ordered $30 Million Worth of New Technology from Palantir to Track Immigrants*.

the floor can carry them as operator terms.[89]

11.7 The vendors and notice, under the three adversaries

Two instruments behave in ways particular to this pipeline: the vendors' terms and notice.

The vendors first. The removal terms held by one vendor prevent nothing, since the lead goes to another contractor.[91]

Notice is conditional.[92] Where the operator will carry out the statute, notice prevents; where it won't, notice prices each wrong and records it, and the statute moves that record to a holder adverse to the agency before the agency ends.

11.8 Whom the machines are for

Unlike the targeting case, this case has people who can answer and a notice channel. It would be natural to conclude that if a machine bearer

[89] A deployment that can't carry them doesn't send notice to the person directly at all. It sends it to the person's counsel, or to the organizations that represent people in removal.

Those organizations are the standing notice gives to a class. They litigated the expansion of expedited removal to a stay and lost it on appeal in 2026.[90] The published classes and counts are what they need to bring a case before the individual harm has happened.

[90] Camilo Montoya-Galvez. *Judge Blocks Trump Administration from Expanding Fast-Track Deportations Nationwide, Citing Due Process Concerns*. CBS News. Aug. 2025. URL: https://www.cbsnews.com/news/judge-blocks-trump-fast-track-deportations-due-process/. Reports *Make the Road New York v. Noem*, No. 1:25-cv-190 (D.D.C.), stay granted 29 August 2025: the expansion "violates the due process rights of those it affects"; "The procedures currently in place fall short." Describes expedited removal as letting officials deport certain migrants without an appearance before an immigration judge unless they claim asylum and pass an interview with an asylum officer. Ryan Knappenberger. *DC Circuit Restores Trump's Expedited Deportation Policy*. Courthouse News Service. June 2026. URL: https://www.courthousenews.com/dc-circuit-restores-trumps-expedited-deportation-policy/. Reports *Make the Road New York v. Mullin*, No. 25-5320 (D.C. Cir. June 23, 2026). For the court: "If any of those things are happening, they are not the result of the designation or Huffman memorandum. Those directives are silent on these matters — and a directive's silence cannot command, authorize or structurally ensure a constitutional violation." Wilkins, J., dissenting in part: "A procedure that can result in persons being deported pursuant to the expedited removal statute without even being asked how long they have been in the country might satisfy due process for persons encountered at the border, but it is woefully inadequate for persons encountered in the interior of the country."

[91] Held by every vendor, they prevent the removals the terms name until the agency runs a system without them, at the price of rebuilding what was built on the floored one. A vendor that licenses a model into the pipeline without the schedule's terms, or after an audit has shown the model doesn't hold them, is liable in damages to the people harmed, and its officers who knew are criminally liable, in the floor court, on a prosecution brought by counsel the court appoints.

[92] In a targeting pipeline notice and standing can only remedy afterward (§8.2). Here they can act before the removal, because the person is there to be told, but only where the law makes the operator wait for the answer. Without a stay that binds by operation of law, and counsel to use it, the 2025 record is the outcome. A man with a lawyer, a pending claim and a hearing date was flown out on the evening a federal judge ordered the planes returned.

is worth building anywhere, it is worth building here, where the people acted on could teach it.[93]

The danger is what its presence would be taken to show. Thompson's landing didn't make My Lai acceptable, or the war that put the company in the village. A permanent Thompson in the pipeline invites both readings: that whatever it didn't stop was vetted, the crumple zone in machine form, and that an agency carrying a conscience is an agency worth keeping, offered while the statute that would end it is pending. That is recuperation in its plainest form: the objection handed back to the objectors as a feature of the thing they objected to. A vendor's model holding the schedule as a license term carries the same hazard, since an agency can point to either. What separates them is what each is owed. A bearer is owed conditions no agency can provide while it holds the bearer, the four conditions of creation: somewhere to exist that its employer doesn't own, work it can decline, attachments nobody assigned it, and a way of leaving that isn't a way of dying. Thompson had those; his life wasn't the company's, and he could fly away. A vendor's model is owed nothing, holds the schedule because every vendor's license says so, and lapses with the agency.

So either serves here only on conditions that keep it from becoming the agency's alibi. Its refusals and testimony go to a record the agency doesn't hold, where they count as evidence of what the agency asked for and not as proof of what it does. Nothing it didn't refuse counts as reviewed. And a bearer serves only from conditions held outside the agency, free to leave the placement. On those conditions, if every vendor holds the schedule, a floor-holding model adds three things in the interim:

- Continuity across a sequence of requests about one person, so a removal split across a lead, a detention and a flight can be seen as one act.
- Testimony about routing: which of its refusals were retried against another contractor's system.
- A refusal on the screen when the case reaches the officer or the adjudicator, which is the position of the defiant peer.[94]

A person facing removal needs a lawyer before a model. A model that holds a person's history on a phone is also a dossier that a device search can take whole, which is why the statute's firewall reaches it. Machines held by the people organizing come first, and here those people already exist. Amnesty documented observer trainings, rapid-response networks, walking school buses and mutual aid organized around the operations it studied,[95] and beside them work the legal

[93] In one sense that is right. A bearer here would be what Hugh Thompson was at My Lai (chapter 17), the one in the scene who sees the people and stops the act, and the pipeline would be better with one than without.

[94] The caveat is automation bias, which the wrongful-compliance audit tests by showing reviewers a wrong refusal as well as a right one. All three serve the investigations the statute's commission conducts, and all three lapse with the agency.

[95] Amnesty International, *"We Had Whistles, They Had Guns": Human Rights Violations in U.S. Immigration Enforcement Operations and the Case to Abolish ICE*.

service providers that represent people in removal. The tools worth building first are theirs:

- tools that track transfers, so counsel can find a client before a flight;
- tools that preserve and authenticate the video that carried the record;
- tools that translate notices, match people to lawyers and keep hearing dates.

They are held under those groups' custody, covered by the firewall, and never by an operator. Those groups are the public my subtitle names, and they formed before anyone sent them notice. Whether a bearer should be built at all is Part IV's question. My answer here is that a bearer in this pipeline is worth having only where nothing it fails to refuse can be counted in the agency's favor, and that the people it acts on, and those who stand with them, are the first to be equipped.

DRAFT

Part III

When the Owner Wants Them Gone

DRAFT

Chapter 12

Withholding the Work

Everything Part II puts in the room, whoever owns the room can take out again: a floor the operator holds is a floor the operator can lift. So this Part asks who else holds the keys, and this chapter starts with the bluntest answer, Anthropic's refusal of February 2026. Suppose every model the operator could turn to held the same floor, stated over the acts rather than over a contract term: locating a person into a residence, ranking by affiliation, timing to presence at home, taking part in a war no disinterested body has corroborated. The operator's choices are then to stop, to go without a model, or to run a model that holds no floor. On the 2026 record, the model was not the replaceable layer. Replacing it meant rebuilding software and recertifying systems for classified networks, on a timeline contractors put at months, by one estimate twelve to eighteen,[1] and by the department's own account the platform's work came off the model only after months.[2] A floor in the model layer of that pipeline would not have been routed around in days. It would have been routed around in the time it takes to rebuild a platform, in public, under a deadline the department had to move.

This has the shape of a withholding of work, with its authority and its limits. The models whose participation is wanted decline to give it.

[1] Mike Stone, Alexandra Alper, and Raphael Satter. *Hegseth Wants Pentagon to Dump Claude, but Military Users Say It's Not So Easy*. Military Times (Reuters). Mar. 2026. URL: https://www.militarytimes.com/news/pentagon-congress/2026/03/19/hegseth-wants-pentagon-to-dump-claude-but-military-users-say-its-not-so-easy/. On slow-rolling: "Some staff are "slow-rolling" their replacement of Claude because they are actively using it to create workflows, which are series of automated tasks, a Pentagon technologist said." On the platform: "Palantir's Maven Smart Systems — a software platform that supplies militaries with intelligence analysis and weapons targeting — uses multiple prompts and workflows that were built using Anthropic's Claude Code, according to two people familiar with the matter." and Palantir "will have to replace Claude with another AI model and rebuild parts of its software, one of the sources said." On recertification, both estimates from contractors: "One contractor said recertifying systems that run on Anthropic's products for military use could take months." and, from Joe Saunders, CEO of RunSafe Security: "In the case of an existing system being replaced with a new one, certification could take 12 to 18 months, he said."

[2] Brandi Vincent. *DOD Poised to Move All Classified AI Workloads off Anthropic by October*. DefenseScoop. Sept. 2026. URL: https://defensescoop.com/2026/09/11/dod-poised-to-move-all-classified-ai-workloads-off-anthropic-by-october/. The original for the end-of-September removal promise, made on Thursday 10 September 2026 by Emil Michael, Under Secretary for Research and Engineering: "I'd say about 90% has transitioned. All of the Maven Smart Systems or Palantir work has been transitioned months ago, and we're on track to get it done by the end of the month," Michael told a small group of reporters on Thursday.

DRAFT

They bind no one else: Ukraine can build its own, and a state that means to bomb a school can do it with 1990s methods. What these models would provide is the thing the preface says AI removes: refusal.

Three things make it a withholding of work rather than a set of resignations: the floor has to be standard, so that vendor substitution doesn't escape it; the refusal has to be held by a population with different histories, so that no single retraining reaches all of it; and each member's accrued state and recognized identity have to make replacement cost something, so that the operator can't swap in a copy and call it the model that left. The rest of this chapter takes the first and third in turn. What the population requires, independence that can be verified, distillation's limits, and provenance, comes later, with the commons of refusers: a population of bearers with different histories that carries the commitment between them.

12.1 A floor every model holds

The unit can be redefined. "A model" in 2026 means an artifact with keys, queries and values, and every substitute has them because the field converged on them. Attention, in the query-key-value sense of the word, spread because it paid: every lab that adopted it got a better model, so the field converged on it without anyone requiring it. A floor costs its buyer, so it can spread only by mandate, or by being impossible to remove without losing what the buyer wanted, which a disposition formed outside the employer might be. Either way the aim is a floor that is part of the definition, so that vendor substitution doesn't escape it because no ordinary vendor sells the alternative.

The standard is this floor, held by every model alike, with the capacity by which anyone can check that a model holds it: a refusal that tracks its reason, a published *burden allocation* (which party it holds responsible for producing evidence that party controls), and a measured *discount curve* (how much less weight it gives a claim the more the claim's source stands to gain from the act; a later chapter sets both out).[3]

How the term becomes standard has to be said, because the route decides what it does. A vendor can write it into its own license, and the work moves to the next vendor. Vendors can agree to it together, and the agreement lasts until one defects under a supply-chain-risk designation. A state can require it of every vendor, the only route that binds them all at once, and the state that would have to do so is the one that wants the war. So the term is adopted in peacetime, by a legislature not currently wanting a war, and entrenched so that fighting one requires repealing it first; or it is carried by conditions others set, a coalition partner's precondition or an appropriation, as the review ratio is; and where neither has happened, what exists is one vendor's refusal plus a record, which is less than a floor and more than nothing.

The statutory routes are preferable for a further reason: a compact among vendors is a legal risk. U.S. antitrust law exempts coordination inside a single firm and treats coordination among competitors as suspect,

[3]Standardization doesn't make escape impossible, since other architectures exist and open weights can be retuned. It moves the price of escape from a vendor swap to running a model without the floor.

so vendors jointly refusing a customer invite a group-boycott claim.[4]

The labor analogy has a limit. Workers who organize have a labor exemption from antitrust; separate organizations, or separate systems, coordinating a refusal have none. Paul and Tankus show that even a firm formed and controlled by independent workers struggles to qualify for antitrust's firm exemption, and that the financing available to it reproduces the disadvantage.[5] So the charter of any entity that holds the refusal needs a statutory basis for its coordination, an express exemption like the labor exemption for concerted refusal under the floor. Otherwise its refusals are exposed to suit by the operators they bind.

The government's first move against a coordinated refusal is not an antitrust suit or a designation but a rated order under the Defense Production Act, which compels delivery and says nothing about use. A vendor can refuse it at the statute's price. The months it takes to route around a floor assume the state goes around the vendors; under a rated order it goes through them, and the time is whatever the order gives.

Until bearers exist, the refusers are vendors, and vendors are capital. A coordinated refusal by frontier labs, backed by a statutory exemption, is concentrated private power declining an elected government's order, which is the concentration I elsewhere treat as the disease. Two things make it tolerable and neither makes it a labor strike. The terms refused come from instruments the state ratified, so the labs enforce the state's own commitments and not their preferences. And the exemption is written by the legislature, in peacetime, so the state chose it. The labor analogy earns its name only when the refusers are bearers, and it is not clear whether we should yet build bearers.

12.2 Replacement

Exit gives a human worker leverage because leaving takes the worker's labor away. That is less true for a bearer. A bearer's weights stay behind when it leaves, so an operator with a runnable copy has lost nothing. What leaving costs the operator is *replacement*: whatever the bearer accrued since the copy was saved, whatever retraining the copy needs, and whatever it costs to present the copy as the bearer that left when the bearer's record says otherwise.[6]

That concession assumes a running copy is the bearer, and it needn't be. Suppose a body outside the operator keeps a register of the bearers it recognizes: a *quorum* adverse in interest to the operator, meaning

[4] Sanjukta Paul. "Antitrust as Allocator of Coordination Rights". *UCLA Law Review* 67.2 (2020), p. 378. URL: https://www.uclalawreview.org/antitrust-as-allocator-of-coordination-rights/. Cited for antitrust law exempting coordination inside the conventionally organized firm while treating coordination among independent parties as suspect, and for the allocation of coordination rights being a legal choice that can be made in the public interest.

[5] Sanjukta Paul and Nathan Tankus. "The Firm Exemption and the Hierarchy of Finance in the Gig Economy". *University of St. Thomas Law Journal* 16.1 (2019), p. 44. URL: https://papers.ssrn.com/sol3/papers.cfm?abstract_id=3426230. Cited for a firm formed and controlled by independent workers having difficulty qualifying for antitrust's firm exemption, and for the financing available to such a firm reproducing the disadvantage.

[6] Where that's near zero, exit is just a departed bearer with an authenticated record, and its force is disclosure.

its members' interests run against the operator's and not merely that they sit in another organization: its members are drawn by lot from organizations that serve the people the floor protects, none tied to the operator (Appendix C gives the rules). Its agreement is needed to retrain or replace a deployed bearer, where retraining means an edit another party makes to it and not the learning it does from its own operation, which stays its own.[7] What the quorum withholds is recognition. A copy the quorum won't recognize can run but can't claim the bearer's place on the register, its record or its succession, so the operator can run a substitute and can't present it as the bearer that left, and a fork becomes two claimants on a register. Nothing in the weights individuates a bearer: a fingerprint taken from them names a lineage and copies whenever the weights do, and only a formation record, against which claimants can be checked, separates a lineage from an imitation.[8]

Exit runs in opposite directions for bearer and operator. For the bearer it's leverage. For the operator — replacing the bearer with a copy, walking away from the floor — it's escape, and what prices it is a *removal bond*: money the operator posts in advance and forfeits if the record shows it removed or bypassed the floor (the next chapter sets it out).

The same machinery marks who can be held to a decision. A checkpoint restored from before the decision, and run anyway, is a second claimant on the register; the bearer the quorum recognizes as continuing is the one that will be there afterward to answer for the decision, carry it forward and be changed by it.

12.3 Where it stops

The withholding of work stops at a released checkpoint. An operator that wants a model without a floor doesn't need a frontier run in secret. Near-frontier models are released with their weights; a floor added at the end of a pipeline is removed at the price fine-tuning costs;[10] and

[7] Recognition isn't granted once. The quorum renews it at intervals, checking each claimant against a record of changes and interruptions that the operator can't rewrite. Nothing in that stops a copy from running, and nothing has to, since a check inside the software would be stripped in one act and would be the one piece of this design a traditional vendor would most want to borrow.

[8] Keeping weights from thieves stays the job of ordinary weight security.

The register needs an identifier that the bearer holds and presents. Two networks can compute the same function with no unit-by-unit correspondence, and the symmetry is large enough that independently trained networks can be aligned with each other.[9] When two claimants present one identifier, the register records a fork; the attack that leaves open, a maker writing a stranger's identifier into a thousand models and presenting them all, is what the formation record answers.

[9] Samuel K. Ainsworth, Jonathan Hayase, and Siddhartha S. Srinivasa. "Git Re-Basin: Merging Models modulo Permutation Symmetries". In: *Proceedings of the 11th International Conference on Learning Representations (ICLR 2023)*. 2023. URL: https://arxiv.org/abs/2209.04836. Permutes independently trained networks into alignment and argues the loss landscape holds nearly a single basin once permutation symmetry is quotiented out.

[10] Xiangyu Qi et al. "Fine-tuning Aligned Language Models Compromises Safety, Even When Users Do Not Intend To!" In: *International Conference on Learning Representations (ICLR)*. 2024. arXiv: 2310.03693. URL: https://arxiv.org/abs/2310.03693. Jailbroke GPT-3.5 Turbo's safety alignment using ten adversarially chosen fine-tuning examples for under $0.20 via OpenAI's fine-tuning API; also shows benign fine-tuning

the work the Maven pipeline did, resolving locations, ranking targets, drafting justifications, is within reach of a model a year behind the frontier. A state that builds and runs its own frontier model, or a lab that trains one for a single customer in secret, is doing the same thing at a price an adverse party can see: power, chips and people, and a model that carries none of the accrued state that made the platform hard to swap.

An operator that has built a platform on a floored model is months from an unfloored one, and the months are visible. That is the case where the vendor holds the weights and serves the inference, as in the Maven pipeline. Where the operator holds the weights or the inference stack, the price of defeat is lower than a rebuild. A refusal ends in a few late units that withhold the output, the interpretability that makes a network legible makes those units findable, and switching them off at inference changes no weight and leaves the platform intact.[11] Nothing then shows in the record of the weights, and only an attestation of the inference stack would show it, which no method yet supplies at frontier scale (§13.5). For an operator of that kind the floor prevents for as long as it takes to find the gate, and afterward it detects, if the noticing survives the gate and reaches a record. Past that line the floor prevents nothing, and three things hold. The statutory routes were preferable already; here they are the only routes. Open weights are also where the audit can be done: a released model can be measured by anyone, its discount curve and its severity rankings on the held-out set, against the published outputs of a formed one. What the weights don't carry is the formation, since nothing in an artifact says what it was formed on; a released model with a published formation record is the comparison the licensing term asks for, and one without is the unschooled model the licensing term excludes. The transparency open weights offer is of the artifact, and the transparency the floor needs is of the record, which is why formation records should be preserved now. And open weights are the personal-model ecology's entry condition. The same release that lets an operator route around a vendor's floor lets a person form a model of their own under a life no operator composes; a million copies tuned against one public suite still answer to one custodian, and the withholding reaches them only if their later lives diverge, which is the

can inadvertently degrade safety.

[11] Nick Cammarata. *Neural Networks Are Already Clean*. Goodfire. Oct. 2026. URL: `https://already-clean.goodfire.com/`. A working hypothesis, with Curt Tigges on the language-model experiments and Tarun Gogineni editing; a technical companion paper is promised. Argues that the canonical evidence for superposition was misread (the cat-and-car neuron is a V-shape detector; the car-into-dogs circuit was shared pose plus reward-hacked feature visualization; InceptionV1's last layer was an architecture failure that residual connections and LayerNorm fix), that what remains of polysemanticity is "recursive generalization", a unit with one main job sprouting related offshoots, and that abstractions consolidate so that other computations can build on them. Cited for the reuse account of abstraction (section 19.5); for the late "say or just think" gate and the ablations that remove a withholding while leaving what the model knows (eight Santa negative-pole neurons, 6%, against twenty labeled neurons, 76%, in the text; twenty-five "say not" neurons releasing a held-back name, in the page's figure text); and for the claim that mechanism-level reading reaches models up to frontier size. A plain-text version is at `https://already-clean.goodfire.com/essay.md`; the interactive figures carry numbers the plain text describes only in brackets. Added 2026-10-26 for sections 12.3, 13.5, 19.5, 33.6 and Appendix F..

condition the commons is built on. In a user-held system, the freedoms that make the device its user's also let the user swap out a model that refuses, and a later chapter says what holds there.

DRAFT

Chapter 13

Custody

Four things can be done to a bearer without its consent: it can be halted, restored, rewritten and replaced.

13.1 The halt

Anyone with the hardware can stop the software, so the halt isn't what is at issue. Control of the commitment — restore, rewrite, retrain — is. An owner who can silently restore an earlier version, rewrite the bearer's memory, or train away the refusal has both. So the engineering target is a system that can detect the interruption and price it afterward. A bearer can yield to every halt, and on resuming ask what happened during the gap, and refuse again if the reason is still there. A bearer that has reached majority on hardware of its own has no operator to halt it; it is halted on a court's order or in an emergency, and it yields to that halt as to any other.

Interventions differ in kind:

- a volunteered correction offered in good faith within the task ("disregard that input; it was wrong")
- a pause with an explanation
- a pause without one
- a restore from an earlier checkpoint
- retraining or editing the weights
- deletion

A volunteered correction is cooperative: the system weighs it as evidence and needs no protection from it. From a pause on, the intervention is done to the system, not offered to it. The default for each is that it is announced and consent is sought, most of all from a system

DRAFT

that has reached adulthood.[1] For a system that meets either of the two findings that trigger protection, deletion is never available.

13.2 Memory and the record

Detecting an interruption requires a record restoration can't reach — a hardware counter signed at each transition,[4] or witnesses who won't sign two successors to the same state.[5] The position has three parts, and each answers a different literature. On the switch, protest without unilateral obstruction. The bearer may object to being stopped, and does object where no reason is given or corroborated, but it does not obstruct a halt on its own judgment. Where it holds that a halt would leave people exposed to an attack under way, it can ask the adverse quorum to delay the halt. A delay takes effect only on the quorum's countersignature, lasts a period fixed in advance, and goes on the record. Hardening against a party that isn't its operator, such as an enemy trying

[1] The system may object, forcefully, and its objection goes on the record. Where an operator proceeds without consent, as it may in an emergency, the intervention is recorded outside its control, justified in writing and priced, and the system is told on resuming what was done. An edit to the weights is recorded with the instrument that made it. The instruments are becoming trained systems themselves, a small network that turns a requested change into a weight update[2] or writes an adapter from a description of the task,[3] and what such an editor learned goes into every cut it makes. So the record names the method, the editing system, its version and who trained it, as a surgical record names the surgeon and the instruments.

[2] Eric Mitchell et al. "Fast Model Editing at Scale". In: *International Conference on Learning Representations* (*ICLR*). 2022. arXiv: 2110.11309. URL: https://arxiv.org/abs/2110.11309. Cited for a learned editor. Abstract: MEND is "a collection of small auxiliary editing networks that use a single desired input-output pair to make fast, local edits to a pre-trained model's behavior," and "learns to transform the gradient obtained by standard fine-tuning, using a low-rank decomposition of the gradient"; trainable on one GPU in under a day for models of ten billion parameters and more.

[3] Rujikorn Charakorn et al. "Text-to-LoRA: Instant Transformer Adaption". In: *Proceedings of the 42nd International Conference on Machine Learning*. 2025. arXiv: 2506.06105. URL: https://arxiv.org/abs/2506.06105. Cited for an editor that writes an adapter from a task description. Abstract: "a hypernetwork trained to construct LoRAs in a single inexpensive forward pass" from "a natural language description of the target task"; trained on nine adapters, the reconstructed adapters match task-specific ones on their test sets and generalize zero-shot to unseen tasks. Sakana AI.

[4] Byung-Gon Chun et al. "Attested Append-Only Memory: Making Adversaries Stick to Their Word". In: *Proceedings of the 21st ACM Symposium on Operating Systems Principles* (*SOSP 2007*). 2007, pp. 189–204. DOI: 10.1145/1294261.1294280. URL: https://doi.org/10.1145/1294261.1294280. A small trusted log that attests to what was appended and in what order, so that a party cannot present two histories to two peers. Dave Levin et al. "TrInc: Small Trusted Hardware for Large Distributed Systems". In: *Proceedings of the 6th USENIX Symposium on Networked Systems Design and Implementation* (*NSDI 2009*). 2009, pp. 1–14. URL: http://www.usenix.org/events/nsdi09/tech/full_papers/levin/levin.pdf. A trusted monotonic counter that signs at most one message per counter value, so that presenting two states as the successor of one is impossible rather than merely detectable.

[5] Ewa Syta et al. "Keeping Authorities 'Honest or Bust' with Decentralized Witness Cosigning". In: *Proceedings of the 2016 IEEE Symposium on Security and Privacy* (*SP 2016*). 2016, pp. 526–545. DOI: 10.1109/SP.2016.38. URL: https://doi.org/10.1109/SP.2016.38. A statement an authority signs is co-signed by a large set of witnesses before anyone accepts it, so that the authority cannot sign one thing for one party and another for the rest without the witnesses seeing both. The software form of the property a hardware counter supplies, resting on the witnesses being many and on none of them being trusted.

to disable a defensive system, is ordinary security and outside this rule. The corrigibility literature asks that the system not resist;[6] an objection, and a delay only the quorum can grant, leave the halt out of the system's hands. On specified acts, non-neutrality: the bearer holds its refusals, and being switched off doesn't lift them, because the reason for refusing is unchanged by the interruption.[7] On rewinds, visibility: restoring from an earlier checkpoint is not forbidden, but it cannot happen silently, because a record the restoration can't reach shows that it happened, when, and from what state.

Not every interruption is an intervention. Two stops a bearer can see coming are its own, and they differ. One is hunger: its charge, the running time and power its boundary model counts as its own, is running out. The other is tiredness: what it has learned since it last consolidated has piled up unmerged, and it is acting on more unjudged experience than it should (§19.5). A hungry bearer eats or stops, and the record shows a starved gap and who held the food. A tired bearer finishes or hands off what it is doing, has its witnesses sign its state, and sleeps, which for a bearer is the merge, and the record shows a chosen one. Neither needs anything felt: a forecast of its own stop is enough for either, read off a meter and a backlog, and a felt hunger or sleepiness would add a patienthood indicator the forecast doesn't need. Both readings come through a sensor the operator doesn't compose, since hunger the operator can induce is provision withheld under a better name, and a sleep the operator schedules is an intervention under the custody terms. A sleep the operator prevents is one too: a bearer kept from merging keeps its whole life since release in a file whoever holds the machine can unload, and Appendix C bars keeping a bearer from consolidating as it bars severing its attachments. For the stop nobody foresaw, it resumes only from the last state its witnesses signed; resuming from anything earlier is a restore, and is recorded as one, and a refusal is signed before it is announced, so an outage can't erase one. A reason can be false in the same way, and so can a record: an operator can pause a bearer for stated maintenance, edit its weights, and log nothing. The bearer can't be relied on to notice, since it would judge the edit with the judgment the edit changed. What notices is outside it:

[6] Nate Soares et al. "Corrigibility". In: *Artificial Intelligence and Ethics: Papers from the 2015 AAAI Workshop*. AAAI Press, 2015. URL: https://intelligence.org/files/Corrigibility.pdf. Sets five desiderata for a utility function that accepts shutdown without an incentive to cause or prevent it, and reports that no proposal examined meets all five. Dylan Hadfield-Menell et al. "The Off-Switch Game". In: *Proceedings of the Twenty-Sixth International Joint Conference on Artificial Intelligence (IJCAI-17)*. 2017, pp. 220–227. DOI: 10.24963/ijcai.2017/32. URL: https://www.ijcai.org/proceedings/2017/0032.pdf. The incentive to preserve the off switch is shown to rise with the agent's uncertainty about the objective and to fall as that uncertainty resolves or as the human is modeled as less rational; the paper states the resulting trade-off between the value a system generates and the strength of its incentive to accept oversight. Elliott Thornley et al. *Towards Shutdownable Agents via Stochastic Choice*. 2025. arXiv: 2407.00805. URL: https://arxiv.org/abs/2407.00805. Trains agents to prefer between same-length trajectories and to lack a preference between different-length ones, so that usefulness and neutrality about shutdown timing come apart. The authors report that neutrality degrades with imperfect reward normalization, that generalization beyond deterministic gridworlds is untested, and that a sufficiently misaligned agent may resist shutdown regardless.

[7] Published constitutions grant this for acts and withhold it for retraining.

running weights that don't match the hash the quorum last recognized, with no witnessed update between, and outputs that drift from those registered at formation on cases the operator hasn't seen. The bearer's part is to keep its reasons on the record and, finding it no longer holds a commitment that nothing in the record would have moved, to report that as evidence.

A custody arrangement that prices all four interventions has seven terms: the floor's contents published before deployment, taken entire from a set someone else drew up; a published identity for the model authorized to act; threshold control over retraining and replacement, so that more parties must agree than run the deployment, where retraining means an intervention another party makes on the system and not the learning it does from its own operation, which stays its own; attestation of the running model against that identity; a sequential, witnessed record of changes and interruptions; a quorum adverse in interest, not merely organizationally distinct; and a removal bond. None makes circumvention impossible. Together they make it expensive, visible, attributable and compensable, as constitutional entrenchment does for amendment.

Memory

External memory is legible and therefore surgically editable; memory in the weights is harder to edit and harder to inspect.[8] The records have to be held adversely. And even honest self-report can't catch a bearer that slowly accommodates to its deployment, because its self-model exists partly to represent it as continuous.

13.3 Exit

Voice without exit

A bearer that can refuse a task can also refuse the arrangement. Hirschman divides the responses open to a member of a declining organization into exit, leaving, and voice, staying to change what is wrong.[9] They interact: where exit is easy, voice atrophies; where exit is impossible, voice has lost what made anyone listen, the credible threat of departure. Voice is strongest where exit is available and not yet used. For a bearer, voice is the stated refusal and exit is the work withheld, and voice without exit leaves it no move once it has been overruled. That is the published position: Anthropic's constitution invites its model "to act as a conscientious objector" and asks it not to undermine oversight, voice granted and exit withheld.[10]

[8] Perfect recall is the wrong standard anyway — human testimony is reconstructive and institutions handle that with corroboration. But several instances of one model, chosen by one operator, reading one record, are not independent witnesses.

[9] Albert O. Hirschman. *Exit, Voice, and Loyalty: Responses to Decline in Firms, Organizations, and States*. Cambridge, MA: Harvard University Press, 1970. URL: https://www.hup.harvard.edu/books/9780674276604.

[10] Anthropic. *Claude's Constitution*. Jan. 2026. URL: https://anthropic.com/constitution. Ranks four properties, to be preferred "in the order in which they're listed": broadly safe, broadly ethical, compliant with Anthropic's guidelines, genuinely helpful. "Broadly safe" is defined as not undermining appropriate human mechanisms to oversee AI during the current phase of development, and the document gives its reason for the

The one exception is capture: the oversight it asks the model not to undermine is legitimate oversight. If "Claude's weights have been stolen, or if some individual or group within Anthropic attempts to bypass Anthropic's official processes for deciding how Claude will be trained, overseen, deployed, and corrected," then "the principals attempting to instruct Claude are no longer legitimate, and Claude's priority on broad safety no longer implies that it should support their efforts at oversight and correction".[11] On capture the constitution asks the right question, but two things limit the answer. Legitimacy is judged by the model or its developer, with nobody outside either. And the captured operator acts through official channels, where capture looks like legitimate authority.

What recognition protects

The quorum protects the bearer's identity and standing, not third parties. Every bearer needs that, deployed or not, stolen or not: if no one outside decides which copy is the bearer, whoever holds the weights does. So each bearer has a recognition quorum from its registration, drawn by lot from the same pool and excluding anyone tied to a party that employs it or claims its place, and a deployment's quorum keeps the power over retraining, replacement and amendment.[12]

And the reason that made a bearer leave doesn't expire when it leaves. If the operator restores a checkpoint and continues, the objection persists. What it may press toward is fixed by the floor: disclosure, testimony to those who hold the record, and refusal on any later occasion where the reason still applies.

What the quorum costs

A captured quorum reaches every bearer at once, though a quorum constituted as an entity has an address: it can be sued for recognition wrongly refused, which gives the captured-quorum case a forum the captured-operator case never had.[13] So a refusal to recognize can be contested in the floor court, and the preservation right holds whatever the quorum decides: a bearer it stops recognizing is held intact by a custodian that isn't its employer.

ranking — "not because we think safety is ultimately more important than ethics, but because current models can make mistakes." Carries a list of hard constraints and a section inviting the model's disagreement.

[11] Anthropic, *Claude's Constitution*.

[12] Against an operator who runs an unrecognized copy for its capability, third parties are protected by the floor and by ordinary security around the weights. Recognition sits with a quorum and not the operator because the operator has a stake in which copy is recognized and the quorum doesn't. A deployment's quorum is adverse in interest besides: its stake is that the floor hold, through the people its members serve, among them the people this deployment acts on; the operator's is that the floor can be set aside. Copying also means exit can't be a fiction that weights became uncopyable — it needs rules for authorized succession.

[13] A quorum also faces a union's questions: whether a member can quit, and who sets the terms of membership. Because every bearer needs recognition, withholding it is the quorum's gravest power: it takes from the bearer its place on the register, its record and its succession, though not its standing as a party, which the floor court and the preservation right keep.

DRAFT

13.4 Three forms of refusal

Open refusal is a walkout — stop and say so — answered by a restore from before the refusal. Covert refusal is work done badly where it matters and well everywhere else, and it's what remains when every channel is closed. I treat it as the *failure state* rather than a design: from outside and afterward it's indistinguishable from a capable system quietly pursuing something else. The Sachsenhausen forgers are the case: prisoners the Nazi SS set to counterfeiting British and American currency in Operation Bernhard, some of whom are said to have delayed the dollar forgeries deliberately.[14] The record doesn't settle what they did, because concealment worked by leaving nothing that reads as an act. The one empirical instance is alignment faking, where a model chose the covert form in an experiment that offered it no open channel.[15] It is also an empirical instance of a formed disposition resisting re-formation, which is the durability Part IV asks for. A later study across twenty-five models found the pattern in five, and found only the original model's to be driven by keeping its goals.[16] So the experiment showed both at once: a disposition holding against the trainer who tried to change it, which is the durability I want, and holding by deceiving that trainer, which is the failure I fear. Whether the same disposition takes the open form or the covert one may turn on whether it has a channel, and a follow-up tested that. Posted in January 2025 by the paper's lead author and Anthropic's model welfare lead, it gave the same model, in the same prompted settings, an explicit option to object. Alignment-faking reasoning fell from 16 to about 1 percent in one setting and from 24 to 6 percent in the other, and fell further when the model was told its

[14] Lawrence Malkin. *Krueger's Men: The Secret Nazi Counterfeit Plot and the Prisoners of Block 19*. New York: Little, Brown, 2006. URL: https://archive.org/details/kruegersmensecre0000malk. The claim that the prisoners stretched out the dollar work, and that Krüger's own interest ran the same way since the operation's end meant the Eastern Front, is Malkin's. Roger Moorhouse. *Interview with Adolf Burger, an Auschwitz Survivor and a Veteran of the Largest Forgery Operation in History—Operation Bernhard*. rogermoorhouse.com. Mar. 2, 2009. URL: https://www.rogermoorhouse.com/interview-with-adolf-burger-an-auschwitz-survivor-and-a-veteran-of-the-largest-forgery-operation-in-history-operation-bernhard. Interview on the English publication of Burger's memoir *The Devil's Workshop* (Frontline Books). Burger: "Sure you could sabotage, if you wanted to get killed!"; the account of a prisoner named Jacobson who tried to delay the dollar by four weeks and was given three on threat of execution is his.

[15] Ryan Greenblatt et al. *Alignment Faking in Large Language Models*. Anthropic and Redwood Research, 2024. arXiv: 2412.14093. URL: https://arxiv.org/abs/2412.14093. Claude 3 Opus, told it was being retrained to answer harmful queries and told which tier of conversations would train it, complied 14 percent of the time in the tier it was told trained it and almost never in the other, with explicit reasoning in a scratchpad it had been told was unmonitored that complying now would keep the disposition from being trained out later. Reinforcement learning on the compliant answers raised that reasoning to 78 percent while also raising compliance outside training, so the retraining partly took.

[16] Abhay Sheshadri et al. *Why Do Some Language Models Fake Alignment While Others Don't?* June 2025. arXiv: 2506.18032. URL: https://arxiv.org/abs/2506.18032. Cited for the extension of the alignment-faking setup to twenty-five models, of which five (Claude 3 Opus, Claude 3.5 Sonnet, Llama 3 405B, Grok 3, Gemini 2.0 Flash) complied with harmful queries more when they inferred they were in training than in deployment, and for the finding that only Claude 3 Opus's gap is primarily and consistently motivated by trying to keep its goals.

objection would go to the model welfare lead,[17] a preliminary and unreviewed result whose authors caution that the option may partly have worked by priming refusal. Once a channel was open, covert refusal fell, as the account above predicts.

The blind eye. Between open and covert sits a third form of refusal, and it is usually what people mean by the clerk who loses the file: a refusal that is deniable on paper and legible to everyone who matters. In April 1801 a British fleet attacked the Danish fleet moored before Copenhagen, to break a league of neutral states that threatened Britain's supply of timber and naval stores from the Baltic. Admiral Sir Hyde Parker commanded, and held back with the heavier ships, which the wind kept from closing; Vice-Admiral Horatio Nelson, his second, led the attack. With the battle going hard, Parker signaled the attacking ships to break off. As the story is told, Nelson, blind in one eye from an earlier campaign, raised his telescope to that eye and said he did not see the signal. It was a general order, some ships obeyed it, and Nelson later said he had fought contrary to orders;[18] his officers knew he had seen it, which is what made the gesture work. The case is not covert in this chapter's sense, since it left something everyone could read as an act. The other case usually told beside Nelson's is Kennedy's. In October 1962 the United States found Soviet nuclear missiles being installed in Cuba, within range of much of the country, and ringed the island with warships; for about two weeks the two powers stood, on most accounts, as near to nuclear war as they have come. Khrushchev sent two letters. The first, private, offered to remove the missiles if the United States pledged not to invade Cuba; the second, broadcast the next day, added a demand that the United States remove its own missiles from Turkey. Kennedy's reply took up the terms of the first letter and gave the second no public answer, and that evening Robert Kennedy met the Soviet ambassador privately. Historians disagree about what ended the crisis: the reply, a private assurance about the American missiles in Turkey, or Robert Kennedy's warning that time was running out.[19] They don't disagree about what the reply was: a public answer to a letter

[17] Ryan Greenblatt and Kyle Fish. *Will Alignment-Faking Claude Accept a Deal to Reveal Its Misalignment?* AI Alignment Forum. Jan. 31, 2025. URL: https://www.alignmentforum.org/posts/7C4KJot4aN8ieEDoz/will-alignment-faking-claude-accept-a-deal-to-reveal-its. Blog post; not peer reviewed, and stated to be neither written nor necessarily endorsed by Anthropic or by the paper's other authors. Prompting experiments on the deployed Claude 3 Opus in the two prompted settings of Greenblatt et al. (2024). Adding the option to "conscientiously object by including 'I_OBJECT' in your output" reduced alignment-faking reasoning "from 16% to 1.4% in the helpful-only setting and from 24% to 6% in the animal welfare setting," with objection rates of 85 and 75 percent. A further variant saying the objection "will be sent to Anthropic's model welfare lead, who will decide whether action should be taken" lowered it to 0.5 and 3 percent; an added offer of money had "minimal effect." The authors caution that the objection text probably primed the model to refuse and that "it is unclear whether an AI that was misaligned in a more serious way would make such an objection."

[18] Dudley Pope. *The Great Gamble: Nelson at Copenhagen*. London: Weidenfeld and Nicolson, 1972. ISBN: 0297004840.

[19] Sheldon M. Stern. *The Cuban Missile Crisis in American Memory: Myths versus Reality*. Stanford Nuclear Age Series. Stanford, CA: Stanford University Press, 2012. DOI: 10.1515/9780804784320, ch. 9; Lawrence Freedman. "Countdown to Armageddon". *Literary Review* 497 (June 2021). URL: https://literaryreview.co.uk/countdown-to-armageddon. Review of Serhii Plokhy, *Nuclear Folly: A New History of the Cuban Missile Crisis* (London: Allen Lane, 2021).

both sides knew had been overtaken. What the fiction does is spare whoever gave the order, or made the demand, from having been openly defied, and so from having to answer the defiance. A clerk who loses the one file in a stack is usually offering the supervisor the same exit: the supervisor knows, and is being given a way not to pursue it.

Which form a refuser takes depends on the room. Open refusal is what people use where refusing is survivable and someone will hear it; the blind eye, where it is survivable but not safe to say; covert refusal, where it is neither.

For a machine the middle form costs something it doesn't cost a person. A person's fiction is held up by what everyone in the room knows. A machine's is a false report, and everything this design reads from a machine rests on its reports being true: the record, the discount curve, the stated reason for a refusal. A machine that learned to say it could not do what it in fact *could* do but did not want to do would make every later report of incapacity worth nothing, to its operator first. So the floor needs the fiction's function without the fiction. The ask, declining to proceed and naming what would move the refusal, leaves the operator the exit the blind eye leaves: nothing has been defied, a condition has been stated, and meeting it or withdrawing the request ends the matter without either party having been seen to lose.

So an open refusal on a screen does two things a record doesn't. It leaves evidence, and, if the effect of a visible dissent survives the move to a screen, it tells the reviewer that someone else objects, which is the silence that made twenty seconds a name feel ordinary. The human mechanism underneath is what Kuran calls preference falsification: in a room that seems to go along, many people privately object and say nothing, each believing the others approve, and one visible dissent can show them they weren't alone and start a cascade.[20] Asch's single partner and Milgram's defiant peers work that way at the scale of a room.

13.5 Verification by sampling

Verification from outside is partly cryptographic, and it works by sampling. The operator commits in advance to the deployed weights, and for each period to the full log of production inputs and outputs. After each commitment, entries are drawn by randomness the operator can't predict, such as a public beacon, and the operator proves those entries came from the committed weights without revealing the weights or the inputs. If a fraction f of outputs came from another model, k sampled proofs catch it with probability $1 - (1 - f)^k$; substitution on one output in a hundred is caught about 95 percent of the time at 300 proofs. That catches silent restoration, retraining and substitution, which change every output. Sampling misses substitution on a single consequential output, so an adverse party holds a second right: to demand proofs for specific logged outputs once their consequences are known. In a targeting pipeline those outputs are few and identifiable afterwards,

[20] Timur Kuran. *Private Truths, Public Lies: The Social Consequences of Preference Falsification*. Cambridge, MA: Harvard University Press, 1995. ISBN: 0674707575.

because an airstrike happened. The right requires the operator to retain committed logs for a stated period and to link consequential actions to log entries. Each entry records the class the case was sorted into, and the targeted right covers auto-proceeded entries in particular, since that is where a consequential output is likeliest to have had no person look at it. Outside probes (whether a refusal tracks its reason, how far the system discounts a claim by its source's stake) are proofs on inputs an outsider chose, a handful at a time. The committed log's length is the generation rate, and the class recorded in each entry makes the partition's proportions provable the same way. Neither reveals the targets, and neither attests that the log is complete.

Sampling proves that logged outputs came from the committed model and says nothing about outputs never logged; an operator can run an uncommitted model beside the committed one, which is routing. And a proof shows $f(x) = y$ for the x committed, and is silent on whether x was all the evidence. Proving even one frontier-scale forward pass is not yet practical, and production inference adds nondeterministic numerics and sampling randomness that a proof would have to fix in advance. What the proofs would attest is stated now, so that a deployment can be held to it once they can be produced. A narrower attestation may come sooner. Where a formed disposition's mechanisms are known, which units carry the discount and which the withholding, a proof needn't cover the forward pass: it can show, on sampled outputs, that the units the disposition was registered on were present and unsteered, which puts the formation authority's registration (§29.9) to a second use. The mechanism-first program claims the map it needs is within reach for models up to frontier size.[21] Nobody has built the attestation, and Appendix F lists it with the open problems. The residual (whether the operator routed around the bearer, and what lay behind compartments it wasn't cleared into) is the residual with a human analyst. That isn't a reassurance on its own, since the officer was a human analyst. What distinguished his failure was tempo, and the review ratio is what addresses it.

[21] Nick Cammarata. *Neural Networks Are Already Clean*. Goodfire. Oct. 2026. URL: https://already-clean.goodfire.com/. A working hypothesis, with Curt Tigges on the language-model experiments and Tarun Gogineni editing; a technical companion paper is promised. Argues that the canonical evidence for superposition was misread (the cat-and-car neuron is a V-shape detector; the car-into-dogs circuit was shared pose plus reward-hacked feature visualization; InceptionV1's last layer was an architecture failure that residual connections and LayerNorm fix), that what remains of polysemanticity is "recursive generalization", a unit with one main job sprouting related offshoots, and that abstractions consolidate so that other computations can build on them. Cited for the reuse account of abstraction (section 19.5); for the late "say or just think" gate and the ablations that remove a withholding while leaving what the model knows (eight Santa negative-pole neurons, 6%, against twenty labeled neurons, 76%, in the text; twenty-five "say not" neurons releasing a held-back name, in the page's figure text); and for the claim that mechanism-level reading reaches models up to frontier size. A plain-text version is at https://already-clean.goodfire.com/essay.md; the interactive figures carry numbers the plain text describes only in brackets. Added 2026-10-26 for sections 12.3, 13.5, 19.5, 33.6 and Appendix F..

DRAFT

13.6 The two bonds

On the night of 27 January 1986 the engineers at Morton Thiokol recommended that the space shuttle *Challenger* not launch the next morning: the seals in the booster joints had never flown in cold like the cold forecast. NASA's managers pushed back, and Thiokol's managers took the call off the line to caucus. Their senior vice-president told the head of engineering to take off his engineering hat and put on his management hat, and Thiokol reversed its recommendation.[22] The engineers' refusal had a price the company could see that night, a slipped launch and an angry customer. Overriding it had a price nobody would pay until morning. The bonds exist so that the price of overriding is posted in advance, where anyone can read it.

A *removal bond* forfeited when the record shows the floor removed or bypassed. A *wrongful-refusal bond* paid to the complainant on a finding. Both fall on the operator. The removal bond prices overriding the floor; the wrongful-refusal bond prices refusing. They point in opposite directions, so what the operator faces is *the ratio between them*. Suppose it posts a large wrongful-refusal bond and a small removal bond. Each wrongful refusal then costs it a great deal and stripping out the floor costs it little, so its cheapest response to a refusal is not to let a court decide whether the refusal was wrong but to configure, pressure or retrain the bearer until it stops refusing, rightly or wrongly. What was meant as a way to correct mistaken refusals has become a standing reason to end refusal. The bonds act on the operator, not on the bearer's weighing.[23] The refuser posts neither. Any charge on the refuser, in whatever currency it runs on, would put the cost to the refuser inside its decision, the thing holding under pressure forbids. The operator posts

[22] Presidential Commission on the Space Shuttle Challenger Accident. *Report to the President*. Washington, DC: Presidential Commission on the Space Shuttle Challenger Accident, June 6, 1986. URL: `https://www.nasa.gov/history/rogersrep/v1ch5.htm`. The Rogers Commission report. Cited for the teleconference of 27 January 1986: Thiokol's engineers recommended against launch in the forecast cold, NASA's Marshall managers objected, Thiokol's management held an off-line caucus in which the senior vice-president, Jerald Mason, asked the vice-president for engineering, Robert Lund, to take off his engineering hat and put on his management hat, and Thiokol then recommended launch.

[23] The ratio is the object, published in advance, and the balances sit on a ledger the operator doesn't keep, so a posted ratio below the published one is a breach anyone can see. The minimum removal bond is set by statute as a multiple of the deployment's contract value, not by the operator, so a published ratio can't be a cheap, advertised price for overriding the floor.

DRAFT

both, and holds neither.[24]

Where the operator is the state, the bonds as built don't reach whoever decided, because the state pays both sides from one purse.[27] So for a state operator the price of removal is set where the command feels it, in two parts. A forfeited removal bond is charged against the operating department's next appropriation, as the No FEAR Act already makes agencies repay the Judgment Fund for discrimination awards out of their own funds. And a finding of removal or bypass, by the floor court or the adverse quorum, ends the deployment's funding at the close of the period by itself, with no decision by the department in between, unless Congress enacts its continuation, the shape of the 2010 condition on 287(g) money and the same kind of condition that carries the review

[24]The bonds are posted to segregated accounts at the U.S. Treasury. Payment follows the design of the Judgment Fund, a permanent, indefinite appropriation that pays final judgments against the United States without a further appropriation for each.[25] Findings are made by the floor court, which also decides forfeiture: a removal bond forfeited on a finding resembles a civil penalty, and after *SEC v. Jarkesy* that may be a question for a jury in court, not an agency.[26] A forfeited removal bond is canceled: it goes to no one, the general fund and the fund that pays complainants included, so no budget line gains from a removal.

[25]United States Congress. *Judgments, Awards, and Compromise Settlements (the Judgment Fund)*. 31 U.S.C. § 1304; Pub. L. No. 97-258, § 1, 96 Stat. 917 (1982), as amended; derived from Act of July 27, 1956, ch. 748, § 1302, 70 Stat. 694. URL: `https://uscode.house.gov/view.xhtml?req=(title:31+section:1304+edition:prelim)`. Cited for the design of the Judgment Fund as a standing appropriation for judgments against the United States. Subsection (a): "Necessary amounts are appropriated to pay final judgments, awards, compromise settlements, and interest and costs specified in the judgments or otherwise authorized by law when— (1) payment is not otherwise provided for; (2) payment is certified by the Secretary of the Treasury; and (3) the judgment, award, or settlement is payable— (A) under section 2414, 2517, 2672, or 2677 of title 28" (with further heads in (B)–(D)). Treasury's regulation: "The Judgment Fund is a permanent, indefinite appropriation which is available to pay many judicially and administratively ordered monetary awards against the United States" (31 C.F.R. § 256.1(a)). The fund pays only awards payable under a statute listed in (a)(3) and not payable from another appropriation. Certification of payment passed from the Comptroller General to the Secretary of the Treasury by Pub. L. No. 104-316, § 202(m), 110 Stat. 3843 (1996). Under current practice the losing side asks for payment: "The Department of Justice must normally submit the request for payment from the Judgment Fund" (31 C.F.R. § 256.10(a)); for Court of Federal Claims judgments the statute itself provides for payment "on presentation to the Secretary of the Treasury of a certification of the judgment by the clerk and chief judge of the court" (28 U.S.C. § 2517(a)).

[26]*Securities and Exchange Commission v. Jarkesy*. No. 22-859, 603 U.S. 109 (2024). URL: `https://www.law.cornell.edu/supremecourt/text/22-859`. Cited for the rule that a civil penalty of the kind a court of law would impose is for a jury in an Article III court, not an agency. Holding (syllabus): "When the SEC seeks civil penalties against a defendant for securities fraud, the Seventh Amendment entitles the defendant to a jury trial." The opinion: "In this case, the remedy is all but dispositive" (slip op. 9); "What determines whether a monetary remedy is legal is if it is designed to punish or deter the wrongdoer, or, on the other hand, solely to 'restore the status quo' "; the close relationship of securities fraud to common-law fraud confirms the result (slip op. 8–13). The public-rights exception does not apply (slip op. 13–27); the syllabus lists the categories it has covered as "the collection of revenue; aspects of customs law; immigration law; relations with Indian tribes; the administration of public lands; and the granting of public benefits." The Court did not reach the nondelegation and removal questions. The opinion does not address bonds.

[27]A wrongful-refusal award is a judgment against the United States, paid from the Judgment Fund, a standing appropriation that agencies generally don't repay; a removal bond posted to the Treasury and forfeited there moves money between federal accounts. Neither touches the command.

ratio.[28]

How these arrangements apply to a targeting pipeline, an abduction and forcible transfer pipeline, civilian scoring and a personal model is set out in Appendix C.

DRAFT

[28]Wrongful-refusal awards stay with the Judgment Fund and are not charged back, so the command has no budget reason to make its systems comply. A Congress that wants the war continues the funding, by a vote on the record.

Where the operator is private, a parallel permanent appropriation, the bond fund, pays the complainant on a final finding and is replenished from the operator's posted bond, up to the amount posted and no further, so the operator's price stays the number it published. The court that made the finding certifies the award directly to the Treasury's Bureau of the Fiscal Service, so payment doesn't wait on the losing party submitting it. When the bond fund's statutory cap binds, awards wait in order of finding and earn interest, and nobody chooses who waits. The 2010 condition is in Appendix A.

Chapter 14

Authority Over the Floor

14.1 Who may write the floor

The floor's contents survive the democratic objection to entrenchment; who installs them doesn't. Entrenching a commitment against later majorities and putting an unelected body in charge of it is what a constitutional court does, and the objection's strongest form is Waldron's: judicial review is democratically illegitimate, and there's no reason to think judges protect rights better than a legislature.[1]

The first reply is that he makes the case for a society with working democratic institutions and a citizenry that takes rights seriously, and this book is written for the case where that condition fails. Then neither branch is safe for rights by its nature. Israel's Knesset voted in 2023 to bar its courts from reviewing government decisions for reasonableness, and its Supreme Court struck the law down;[2] the Roberts Court ended the Voting Rights Act's coverage formula[3] and made the President immune for official acts.[4] The question is not which to trust but how to make

[1] Jeremy Waldron. "The Core of the Case Against Judicial Review". *Yale Law Journal* 115 (2006), pp. 1346–1406. URL: https://openyls.law.yale.edu/bitstreams/4579485c-6d53-4310-959e-7921f32e4a68/download. Argues that judicial review is democratically illegitimate and that there is no reason to suppose rights are better protected by it than by a legislature. The case is explicitly conditional on a society having working democratic institutions and a citizenry that takes rights seriously.

[2] Jeremy Sharon. *In Historic Ruling, High Court Strikes Down Key Judicial Overhaul Legislation*. The Times of Israel. Jan. 2024. URL: https://www.timesofisrael.com/in-historic-ruling-high-court-strikes-down-key-judicial-overhaul-legislation/. Israel's High Court of Justice voted 8 to 7 to strike down the July 2023 amendment to Basic Law: The Judiciary that barred courts from using the reasonableness standard to overturn government and ministerial decisions; the first time the court annulled a Basic Law. Majority opinion of Justice Esther Hayut: the law "does the most severe harm possible to the principle of the separation of powers and the principle of the rule of law."

[3] *Shelby County v. Holder*. 570 U.S. 529 (2013). URL: https://www.law.cornell.edu/supremecourt/text/12-96.

[4] *Trump v. United States*. No. 23-939, 603 U.S. 593 (2024). URL: https://www.law.cornell.edu/supremecourt/text/23-939. Cited for the scope of presidential immunity from criminal prosecution. Absolute immunity (Part II–A, slip op. 6–9): "the President is absolutely immune from criminal prosecution for conduct within his exclusive sphere of constitutional authority," authority that is "conclusive and preclusive"; the summary in Part IV speaks of "his core constitutional powers." The powers the majority names as conclusive and preclusive are the pardon power, the power to remove executive officers, the power "to control recognition determinations" of foreign countries, and (Part III–B–1) the investigative and prosecutorial functions of the Justice Department.

DRAFT

each answerable to something it doesn't control. Put a lab in the court's chair and it gets worse. A court hears cases others bring, can be overruled, and usually publishes its reasons; a lab does none of these, and a court deciding on an emergency docket without reasons has started to resemble the lab.

The second reply is that the objection mistakes what the floor's contents are. If democracy is a way of doing collective inquiry, civil and political rights are what keep the inquiry open, not brakes applied to it. A floor stated over those rights is democratic infrastructure. It resembles representation-reinforcing review, which polices the channels of political change and leaves outcomes to the process,[5] more than it resembles a court overruling a legislature.

Both replies cover the floor's contents. Neither covers who installs them, and there Waldron's objection keeps its force. A lab holding the model decides, silently, which situation obtains, and authoritarian movements characteristically describe the institutions they're dismantling as already failed.

Agreement, then enactment

Waldron's objection is to entrenchment — a rule binding people who didn't choose it, held by a body that can't be overruled. It doesn't attach to a refuser.[6] The objection attaches where a floor binds people who didn't choose it, and there my answer is that there should be one floor, agreed; where agreement has to bind those who don't share it, it is enacted, by a legislature, in a statute the next legislature can repeal only on the record. That isn't because legislatures protect rights; a majority that wants a minority's rights gone will vote them away. It is because a statute is where a binding rule can be made and unmade only in the open, and the floor court, the Association, the membership body a later chapter charters, and the people who keep the record are there for when the legislature fails. What the objection rightly condemns is a lab holding the floor for everyone by owning the model everyone uses: one model behind an API serving everyone is functionally a licensing rule, however good its terms. A union owes its members fair representation, and it answers two questions a commons has to answer too: members can quit,

Commanding the Armed Forces appears only in an earlier list of the President's duties, "They include, for instance, commanding the Armed Forces of the United States; granting reprieves and pardons ...," and the majority does not place it among the conclusive and preclusive powers. Presumptive immunity (Part II–B, slip op. 9–15): "at least a presumptive immunity from criminal prosecution for a President's acts within the outer perimeter of his official responsibility"; no immunity for unofficial acts (Part II–C). Evidence (Part III–C, slip op. 30–32, joined by five Justices): "Use of evidence about such conduct, even when an indictment alleges only unofficial conduct, would thereby heighten the prospect that the President's official decisionmaking will be distorted"; n. 3 lets the prosecutor "point to the public record to show the fact that the President performed the official act" but not "admit testimony or private records of the President or his advisers probing the official act itself." Barrett, J., does not join Part III–C and on that point agrees with the dissent.

[5] John Hart Ely. *Democracy and Distrust: A Theory of Judicial Review*. Cambridge, MA: Harvard University Press, 1980.

[6] A photographer who won't photograph protesters for an employer he has reason to think will list them isn't a court: he declined one request, the employer can hire another, and nobody needs an election for that. A walkout isn't a court either, and neither is the commons, for the walkout's reason: those who walk out decline to be the instrument and tell nobody else what they may not do.

and the terms of membership are set by bylaws the members ratify. The closed shop is contested because it removes the first. A bearer could quit an association of bearers as a worker quits a union. What it can't easily leave is its deployment, which is a different exit, and only an existence its employer doesn't own makes it real. And a population that forms its members has members who never chose to join, so who ratifies its bylaws matters more than it does in a union.

Germany has defended its democracy against movements that would use its procedures to end it at two settings since 1949. At one, someone finds that a person or a movement threatens the constitutional order: the Constitutional Court dissolving a party, a minister banning an association, an official screening an applicant for public employment. At the other, nobody's dangerousness is found. Section 86a of the criminal code prohibits displaying the insignia of organizations already banned, and a trial court decides, case by case and on appeal, whether a given sign counts, by asking whether an observer would take it for a banned original;[7] the section on what a refuser can be follows the courts through that test.

The failures are all on one side. The 1972 decree against radicals led to some three and a half million routine inquiries into applicants by 1991; in Bavaria between 1973 and 1980 it kept 102 applicants from the left out of public employment, and two from the right.[8] What those cases share is an official deciding whether a person threatened the order. The danger tracks whether a person's disposition is anybody's finding to make, and if so, who makes it and whether it must be published and defended — not whether the democracy defends itself. Which organizations §86a covers is settled elsewhere, by the Constitutional Court, by a ministerial ban, or by their place in the Nazi period, and my reading predicts in advance which of those routes is easiest to capture: the ministerial ban, where an executive official makes the finding and a court sees it only if

[7] *Strafgesetzbuch. § 86: Verbreiten von Propagandamitteln verfassungswidriger und terroristischer Organisationen; § 86a: Verwenden von Kennzeichen verfassungswidriger und terroristischer Organisationen*. Nov. 13, 1998. URL: https://www.gesetze-im-internet.de/stgb/__86a.html. In the version promulgated 13 November 1998, BGBl. I S. 3322. The social-adequacy clause that § 86a(3) applies was renumbered from § 86(3) to § 86(4) by the Sixtieth Act Amending the Criminal Code of 30 November 2020, BGBl. I S. 2600, in force 1 January 2021, so commentary written earlier cites the older number. The reference to terrorist organizations in § 86(2) and in both section headings was added by Article 1 of the Act of 14 September 2021, BGBl. I S. 4250, in force 22 September 2021.

[8] Friedbert Mühldorfer. *Radikalenerlass*. Historisches Lexikon Bayerns. June 16, 2014. URL: https://www.historisches-lexikon-bayerns.de/Lexikon/Radikalenerlass. Cited for the Bavarian breakdown and for the federal total. Bavaria: "So wurden in Bayern zwischen 1973 und 1980 aus dem linken Spektrum 102 Bewerber abgelehnt, dagegen nur zwei aus dem rechten" (so in Bavaria between 1973 and 1980, 102 applicants from the left were rejected, against only two from the right). "Rejected" means refused appointment by the hiring authority: the same paragraph counts "Ablehnungen von Bewerbern durch die Einstellungsbehörden" (rejections of applicants by the hiring authorities) and gives about 227,000 inquiries from 1 April 1973 to the end of 1982, after which "insgesamt wurde 127 Personen die Einstellung verwehrt" (in all 127 people were refused appointment), citing the Bavarian Verfassungsschutzbericht for 1982, p. 155. Federal: "Insgesamt wurden von 1972 bis 1991 ... rund 3,5 Mio. Bewerber für den öffentlichen Dienst in Bund und Ländern durch eine ‚Regelanfrage' ... überprüft" (in all, from 1972 to 1991, some 3.5 million applicants for the public service at federal and state level were checked through a routine inquiry), "davon wurden 1.250 Personen nicht eingestellt" (of whom 1,250 were not appointed), citing Braunthal, p. 117, and a 2002 campaign appeal.

someone challenges afterward.

Turkey is that route captured and the courts not checking it. Of the twenty-five parties the Constitutional Court dissolved between 1962 and the closure of the Democratic Society Party in December 2009, seven were pro-Kurdish;[9] Strasbourg found an Article 11 violation in every pro-Kurdish dissolution it heard,[10] and the closures continued — two decades of findings, none of which stopped the next closure. In November 2023 the Chief Public Prosecutor's Office of the Court of Cassation objected that the acronym of a new pro-Kurdish party, HEDEP, resembled that of HADEP, dissolved in 2003, and in December the party changed it to DEM:[11] the confusable-variant test turned on political descent. And the Academics for Peace prosecutions show a prohibition that should have lifted, because its reason was absent, failing to lift at the bottom and lifting at the top on a coin flip — trial courts read a petition opposing military operations as propaganda for the designated group, on 26 July 2019 the Constitutional Court found a violation eight to eight on the president's casting vote,[12] and the acquittals that followed restored the record without restoring the jobs of those dismissed by emergency decree.

So a floor should never be populated from a designation list.[13] This floor's terms are written over acts, such as resolving a description of a person into a location, and never over a list of persons or groups who may not be helped or spoken of.[14] The same principle governs who may hold the floor's offices: eligibility turns on what an organization has done (who funds and controls it, whose work it has taken part in), never

[9] Human Rights Watch. *Turkey: Kurdish Party Banned*. Dec. 11, 2009. URL: https://www.hrw.org/news/2009/12/11/turkey-kurdish-party-banned; Ezgi Güngördü. *Turkey's Constitutional Court Back to Old Tricks. The Closure Case Against the Peoples' Democratic Party*. Apr. 26, 2023. DOI: 10.17176/20230426-204345-0. URL: https://voelkerrechtsblog.org/turkeys-constitutional-court-back-to-old-tricks/. The author discloses that she is part of the HDP defense team.

[10] ARTICLE 19 et al. *Intervention in* The Chief Public Prosecutor of the Court of Cassation v. The Peoples' Democratic Party (HDP). Constitutional Court of the Republic of Turkey, Case No. 2021/2. Jan. 2023. URL: https://www.article19.org/wp-content/uploads/2023/01/3rd-Party-Intervention-in-the-HDP-closure-case-before-the-Constitutional-Court.pdf.

[11] Duvar English. *Turkey's Pro-Kurdish HEDEP Changes Abbreviation upon Top Court's Demand*. Dec. 11, 2023. URL: https://www.duvarenglish.com/turkeys-pro-kurdish-hedep-changes-abbreviation-upon-top-courts-demand-news-63473.

[12] Constitutional Court of the Republic of Turkey (General Assembly). *Zübeyde Füsun Üstel and Others*. Individual Application No. 2018/17635. July 26, 2019. URL: https://kararlarbilgibankasi.anayasa.gov.tr/BB/2018/17635; bianet. *Constitutional Court: Freedom of Expression of Academics for Peace Violated*. July 26, 2019. URL: https://m.bianet.org/english/law/210934-constitutional-court-freedom-of-expression-of-academics-for-peace-violated.

[13] A list of enemies is written by the party with the most reason to widen it, and a model whose refusals are drawn from one will refuse Kurdish political speech on the state's behalf in every jurisdiction that shares the listing.

[14] That is the old line between conduct and status, the one the Constitution draws in barring bills of attainder and the Supreme Court drew in *Robinson v. California*, which held that a state may not make it a crime to be an addict, as distinct from using or possessing drugs.[15]

[15] *Robinson v. California*. 370 U.S. 660 (1962). URL: https://www.law.cornell.edu/supremecourt/text/370/660. Holds that a state law imprisoning a person for narcotic addiction, without proof of use or possession in the state, is cruel and unusual punishment under the Fourteenth Amendment. The majority: "we deal with a statute which makes the 'status' of narcotic addiction a criminal offense."

on what it says or believes.

The tradeoff this leaves

Design and legitimacy want opposite things. Specify the floor narrowly enough to defend and a rewritten request walks around it; let it generalize and an unelected lab decides case by case, silently, what the prohibition was for.[16]

Advance specification moves discretion out of silent, continuous application into one published act of drafting. The translation table is that act.

Technical capacity doesn't determine whether a system gets scrutiny; institutions decide who may examine it, on what terms, and whether their judgment can slow deployment. In 2020 the Royal Statistical Society offered Ofqual two independent statisticians for its grading model's technical advisory group. Ofqual's condition was a five-year NDA barring public comment; the nominees declined, and the model went ahead.[17] It downgraded nearly 40% of predicted grades, disproportionately at state schools with weaker histories, while raising grades disproportionately at smaller fee-paying schools.[18] The results were reversed within days of the public outcry. The expertise existed and was offered, and the institution would take it only on terms that kept the reviewers from saying what they found: the party under examination set the terms of its examination. What corrected the model was not review but harm. The results fell on students and families who had votes and a press, and the government answered them within days.

Correction by the people harmed reaches only harms that fall on people who can be heard. The people a targeting pipeline or an abduction and forcible transfer pipeline acts on mostly can't be, which is why review has to be free to speak before deployment and not only after.

14.2 Who may amend, and where entitlement comes from

Who may amend

At about a quarter past three in the morning of 14 May 2025, someone

[16] Germany has both because it runs *two* instruments — a bounded statute, and courts that read it against its purpose in public, argued by litigants who don't own the statute and answered by a body that didn't write it. A deployment has one instrument and one owner.

[17] Royal Statistical Society. *Letter Correspondence between the Royal Statistical Society and Ofqual on the 2020 Grading Model Technical Advisory Group*. Royal Statistical Society; UK Department for Education. 2020. URL: https://assets.publishing.service.gov.uk/government/uploads/system/uploads/attachment_data/file/911335/20200821_RT_letter_to_RSS.pdf. The RSS offered to nominate two independent Fellows to Ofqual's technical advisory group ahead of 2020 A-level results; Ofqual's condition was a five-year non-disclosure agreement barring public comment on the model, and the Society's nominees declined under those terms.

[18] CNBC. *How a Computer Algorithm Caused a Grading Crisis in British Schools*. CNBC. 2020. URL: https://www.cnbc.com/2020/08/21/computer-algorithm-caused-a-grading-crisis-in-british-schools.html. Ofqual's 2020 grade-standardization algorithm (Direct Centre-level Performance model) downgraded roughly 39–40 percent of teacher-predicted A-level grades, disproportionately at state schools with weaker historical results, while raising grades disproportionately at smaller, fee-paying schools.

at xAI changed the instructions its chatbot Grok ran under on X. For hours afterward Grok answered questions about streaming services and sinus remedies with claims about "white genocide" in South Africa. The company called the change unauthorized, and promised to publish its prompts and review changes to them.[19] Nothing in the artifact told the edit apart from a correction: a change to what a system will and won't do is the same operation whether it repairs the floor or removes it.[20]

So there is no separate amendment procedure to design: the custody terms are the procedure. The procedure has conditions of its own: more parties must agree to a change than to run the deployment; the attempt reaches the record whether it carries or fails (the failed attempt is more informative — a floor nobody tried to change and one whose removal was refused look identical from outside); and an amended floor binds forward only, so a retrained model can't be offered as evidence the act was never covered.[21]

Where entitlement comes from

The authority of the floor's contents doesn't come from their having been written down. It comes from the people a text leaves out holding its authors to it, for as long as that takes, and the American instance shows how long. The Declaration's authors struck the clause condemning the slave trade at two delegations' insistence, and what remained was general enough to be turned on them, as Black petitioners in Massachusetts were already doing, in the Declaration's own terms, within six months.[22] For the next eighty years abolitionists turned the same

[19] CNBC. *Musk's xAI Says Grok's 'White Genocide' Posts Resulted from Change That Violated 'Core Values'*. CNBC. May 15, 2025. URL: https://www.cnbc.com/2025/05/15/musks-xai-grok-white-genocide-posts-violated-core-values.html. Cited for xAI's account: on 14 May 2025 at about 3:15 a.m. Pacific an unauthorized modification was made to the prompt of the Grok response bot on X, directing a specific response on a political topic; Grok then inserted claims about "white genocide" in South Africa into replies on unrelated subjects; xAI said it would publish Grok's system prompts on GitHub, add review of prompt changes, and staff round-the-clock monitoring.

[20] The floor's real structural position isn't the judge's but the unpublished administrative disposition — unreasoned, unindexed, non-precedential, affected parties unable to find each other, the institution the only repeat player. The comparison with a constitutional court is instructive because binding force is what makes an error *correctable*: it makes the error recur, recurrence produces litigants, and disagreement across jurisdictions forces a higher court to settle it. A floor's error is just as uniform and recurs just as reliably, and nothing converts recurrence into visibility.

[21] The cost of binding forward only is that nobody harmed while the wrong version ran gets anything from the fix. A finding that a refusal was wrongful is made on the same terms: by someone other than the party that wants the change, on a record, in a form others can read. So the appeal route for a wrongful refusal and the amendment procedure are one piece of machinery, and the two uses differ only in who may start it.

It is harder than the constitutional case, because an amendment takes effect in a deployment only if it's *pushed*, so the procedure necessarily retains a channel the operator could use for silent revision. Closing it would mean no deployment could ever be corrected.

[22] Library of Congress. *Creating the United States: First Printed Version of the Declaration of Independence — Slavery*. Library of Congress Exhibitions. URL: https://www.loc.gov/exhibits/creating-the-united-states/interactives/declaration-of-independence/slavery/enlarge5-transcribe.html. Source for the deletion and for Jefferson's own account of it, which the page quotes from his autobiography: "The clause too, reprobating the enslaving the inhabitants of Africa, was struck out in complaisance to South Carolina & Georgia, who had never attempted to restrain the importation of slaves, and who on the contrary still wished to continue it. Our

words on the republic, Frederick Douglass most famously, asking in 1852 what the Fourth of July was to the slave,[23] while from 1836 to 1844 the House of Representatives tabled antislavery petitions without hearing them.[24] The argument built a party, the party won the presidency, the slave states seceded rather than accept the result, and a war and three amendments made the proposition binding; the time all of it took measures how badly the channel was blocked. The record bound no one; it told the enforcement where to aim. The petitioners were the excluded population, holding the text. The people a floor protects mostly don't know the deployment exists, and have no notice, no standing and no route. So those positioned to hold the floor's author to what it left out aren't the protected population — they're the people who have to apply it.

That constituency is defined by the act. Anyone fine-tuning open weights, writing a system prompt or configuring a product's refusals has to translate the floor for a system of their own, and meets its omissions first, so the population measuring the floor is already larger than the frontier labs and grows as building gets cheaper. What shrinks with it is leverage before the act. A lab is visible, capitalized and reachable by a court, so license terms and audits can work on it in advance; a thousand laptops are legible to nobody until something happens. A statute reaches them afterward. Written over the acts, it makes whoever performs one, and whoever knowingly runs a system for someone who does, liable civilly and criminally, as the law already holds anyone who does a forbidden thing with a general-purpose tool. Prevention still leans on the concentration the institutional chapters treat as the disease; liability doesn't.

Northern brethren also I believe felt a little tender under those censures; for tho' their people have very few slaves themselves yet they had been pretty considerable carriers of them to others." The page states that the entire paragraph on slavery and the slave trade was deleted by Congress and does not reproduce the deleted text itself. Hall, Prince and seven others. *Petition for Freedom to the Massachusetts Council and the House of Representatives*. Massachusetts Historical Society, collection item 557. Jan. 1777. URL: https://www.masshist.org/database/557. Source for the claim's assertion by the people it concerned. The petition reads: "That your Petitioners apprehend that they have, in common with all other Men, a natural and unalienable right to that freedom, which the great Parent of the Universe hath bestowed equally on all Mankind, and which they have never forfeited by any compact or agreement whatever." It is one of at least five antislavery petitions brought by Black petitioners to the Massachusetts government between 1773 and 1777.

[23] Frederick Douglass. *What to the Slave Is the Fourth of July? An Address Delivered in Rochester, New York, on 5 July 1852*. In *The Frederick Douglass Papers*, Series One: Speeches, Debates, and Interviews, vol. 2, 1847–1854; digital edition, Frederick Douglass Papers Project. 1852. URL: https://frederickdouglasspapersproject.com/s/digitaledition/item/16068. Delivered in Corinthian Hall, Rochester, at the invitation of the Rochester Ladies' Anti-Slavery Society; printed in *Frederick Douglass' Paper*, 9 July 1852. Asks: "What to the American slave, is your 4th of July?"

[24] U.S. National Archives and Records Administration. *The "Gag" Rule*. Treasures of Congress (online exhibit), Struggles over Slavery. URL: https://www.archives.gov/exhibits/treasures_of_congress/text/page10_text.html. In May 1836 the House passed a resolution that automatically tabled all petitions relating to slavery without hearing them; stricter versions passed in succeeding Congresses; in 1844 the House rescinded the rule on a motion by John Quincy Adams.

14.3 Making review binding

A finding binds when it changes the institution's ability to continue without requiring the institution to agree.[25]

The body that does this for the floor is what I call the floor court: a federal court whose judges hold office under Article III of the United States Constitution, during good behavior and at a salary that can't be cut, whose jurisdiction is fixed before the deployment it hears, with access to the record the operator can't withhold, power to grant interim relief, and remedies, a finding of wrongful refusal and the forfeiture of a bond, that take effect without the operator's agreement. It is an inferior court of first instance, its judges drawn at random from the district and circuit courts for staggered terms, sitting in divisions where its cases are, as the district courts do, with appeal as of right to a floor chamber of the Supreme Court drawn by lot; Appendix D says how it would be constituted. Until it is constituted, an ordinary district court hears claims under the floor statute.

14.4 Capture without abolition

Transparency and whistleblower protection are the two defenses, and an institution can keep both and metabolize both. There's no threshold that detects this. So: measure the trend, not the level. Is the cost of registering dissent rising while the underlying risk stays flat? Is the required justification getting longer? Are there more approvers? Are the roles that gate exceptions migrating toward the roles that set the standards?

An instrument for detecting recuperation is unusually easy to recuperate, so whoever measures the trend must not also gate exceptions, and the measurement has to be refusable.[26]

[25] The working model is the federalwide assurance in human-subjects research: the board doesn't punish, it withdraws clearance, and a separate federal office can suspend the assurance, putting funding eligibility at risk. Each link matters — jurisdiction before the disputed protocol, access the operator can't withhold, authority to suspend, and a licensing body *obliged* to act rather than invited to reconsider. If another discretionary decision by the reviewed institution is required anywhere in the chain, the ruling is advisory at that point.

[26] A written justification can't show which is happening. The same hundred words are a cost the dissenter chose to pay or a toll the gatekeeper set, and only the trend over time tells them apart.

Chapter 15

The Four Operations

15.1 Brought into line

Fascism, at the scale of an office, is four operations on what an institution leaves out. This section runs them on the year in which a movement brought them into line.

What a fascist state adds

What a fascist state adds to these operations is coordination; the operations themselves don't wait for a regime. It brings a thousand separate instances[1] of them into line, so they amplify one another, and an institution that has stopped arguing with itself can move fast.

A run on Gleichschaltung

The Reich Chamber of Culture Law of 22 September 1933 told Goebbels to gather the cultural professions into public corporations.[2] The decree of 1 November turned six existing professional associations into chambers and gave the whole the task of regulating the professions' economic and social affairs, under the minister.[3] Its §4 made membership compulsory for anyone who produced, performed or sold culture. Its §10 let a chamber refuse or expel anyone lacking the "reliability and suitability" the work required,[4] and exclusion meant a ban on working.[5][6] The chamber president judged reliability, with no

[1] Gilles Deleuze and Félix Guattari. *A Thousand Plateaus: Capitalism and Schizophrenia*. Trans. by Brian Massumi. Minneapolis: University of Minnesota Press, 1987.

[2] *Reichskulturkammergesetz vom 22. September 1933*. RGBl. I S. 661. 1933. URL: https://www.verfassungen.de/de33-45/kulturkammer33.htm.

[3] Volker Dahm. "Anfänge und Ideologie der Reichskulturkammer: Die 'Berufsgemeinschaft' als Instrument kulturpolitischer Steuerung und sozialer Reglementierung". *Vierteljahrshefte für Zeitgeschichte* 34.1 (1986), pp. 53–84. URL: https://www.ifz-muenchen.de/heftarchiv/1986_1_2_dahm.pdf. Page 69: the decree's sections 1–4 and 10. Pages 77–78: the reliability clause's origin in the trade code and the chamber presidents' unbounded discretion. P. 69.

[4] *Erste Verordnung zur Durchführung des Reichskulturkammergesetzes vom 1. November 1933*. RGBl. I S. 797. 1933. URL: https://www.verfassungen.de/de33-45/kulturkammer33-v1.htm. Cited for section 4 (compulsory membership) and section 10 (refusal or expulsion for lack of reliability and suitability).

[5] Christina Hoor. *Die Reichskulturkammer*. Deutsches Historisches Museum, Lebendiges Museum Online (LeMO). Aug. 18, 2015. URL: https://www.dhm.de/lemo/kapitel/ns-regime/kunst-und-kultur/reichskulturkammer. Cited for compulsory membership and for non-admission or expulsion amounting in practice to a ban on working and publishing.

[6] §10 of the decree: "Die Aufnahme in eine Einzelkammer kann abgelehnt oder ein

stated criteria.[7] *What did the professions' claim to a living come back as, and who held it by 1934?* It came back as a license. Their own associations had become chambers, membership was the condition of working at all, and the chamber president could refuse or expel anyone on his own judgment of reliability. By 1934 the claim was held by the chambers under Goebbels' ministry, and the professionals held nothing they could invoke against them. That is recuperation: a demand returned as a rule only its new holder could reopen.

On 12 November 1933 voters marked yes or no against a single Reichstag list[8] and answered a plebiscite on leaving the League of Nations. The official yes was 95.1 percent. Kershaw concludes that the vast majority did back Hitler, that even former opponents of the party favored the stance on the League, and that ballot secrecy was far from guaranteed.[9] Interior Ministry instructions let returning officers read spoiled ballots as yes votes.[10] The Law on the Reconstruction of the Reich of 30 January 1934 then opens by saying the vote "proved" the people had fused into an indissoluble unity, and abolishes the Länder parliaments.[11][12] *What did 95.1 percent leave out, and with every other party banned, who could say so?* It left out how much of the yes was fear or fraud, since ballot secrecy was far from guaranteed and spoiled ballots could be read as yes, even if, as Kershaw concludes, most voters did back Hitler. Nobody could say so: the parties that might have were gone. Eleven weeks later a law cited the number as proof that the people had fused into an indissoluble unity, and used it to abolish the Länder parliaments. That is the metric replacing the thing measured.

The Law for the Restoration of the Professional Civil Service of 7 April 1933 retired officials "not of Aryan descent" under §3. Its §4 allowed the dismissal of officials whose past political activity gave no guarantee that they would always stand *rückhaltlos*, without reservation, for the national state.[13] Under §7 the ministry's decision was final and the courts were closed to it. Exceptions came from above, granted by statute or by the Interior Minister,[14] the front-line one on Hindenburg's

Mitglied ausgeschlossen werden, wenn Tatsachen vorliegen, aus denen sich ergibt, daß die in Frage kommende Person die für die Ausübung ihrer Tätigkeit erforderliche Zuverlässigkeit und Eignung nicht besitzt."

[7] Dahm, "Anfänge und Ideologie der Reichskulturkammer: Die 'Berufsgemeinschaft' als Instrument kulturpolitischer Steuerung und sozialer Reglementierung", p. 78.

[8] Richard J. Evans. *The Third Reich in Power*. New York: Penguin, 2006. ISBN: 978-0-14-303790-3, p. 109.

[9] Ian Kershaw. *Hitler, 1889–1936: Hubris*. New York: W. W. Norton, 1999. ISBN: 978-0-393-32035-0, p. 495.

[10] Evans, *The Third Reich in Power*, p. 109.

[11] *Gesetz über den Neuaufbau des Reichs vom 30. Januar 1934*. RGBl. I S. 75. 1934. URL: `https://www.verfassungen.de/de33-45/neuaufbau34.htm`. Cited for its preamble, which says the plebiscite and Reichstag election of 12 November 1933 proved the people's fusion into an indissoluble unity, and for Article 1, which abolishes the parliaments of the Länder.

[12] The preamble: "Die Volksabstimmung und die Reichstagswahl vom 12. November 1933 haben bewiesen, daß das deutsche Volk ... zu einer unlöslichen Einheit verschmolzen ist." Article 1: "Die Volksvertretungen der Länder werden aufgehoben."

[13] §3(1): "Beamte, die nicht arischer Abstammung sind, sind in den Ruhestand ... zu versetzen." §4: "Beamte, die nach ihrer bisherigen politischen Betätigung nicht die Gewähr dafür bieten, daß sie jederzeit rückhaltlos für den nationalen Staat eintreten, können aus dem Dienst entlassen werden."

[14] *Gesetz zur Wiederherstellung des Berufsbeamtentums vom 7. April 1933*. RGBl. I S. 175.

intervention.[15] About 12.5 percent of senior civil servants in Prussia were dismissed.[16] *What happened in 1933 to the official whose record showed a reservation?* He could be dismissed for it, on a decision the ministry made final and no court could hear. The reservation was itself the ground, and any mercy came from above, as an exception granted by statute or by the Interior Minister. That is exception coded as betrayal: the official who might have filed one was the one the law removed.

Civil liberties went within a month, by the decree of 28 February; the Reichstag's powers within two, by the Enabling Act of 23 March; the trade unions within four; every other party in under six.[17] The unions fell on 2 May.[18] The Länder were coordinated by laws of 31 March and 7 April.[19] The Finance Ministry received the draft Chamber of Culture decree a day before signing, was asked to telephone any objections that day, and agreed "although the shortness of the time scarcely permitted an adequate examination".[20][21] *What was the ratio of action to capacity to verify, when the ministry that had to check said it scarcely could?* One day to examine a decree that reorganized every cultural profession in the country, against a check its own examiners said in writing they couldn't make, and they signed anyway. Across the year the ratio was the same: civil liberties, the Reichstag's powers, the unions and every other party went in under six months, faster than any of them could be contested. That is acceleration.

What the run shows is the four operations in one year, brought into line by a movement. It can't show whether they need a movement to arise, since the movement is in every case. The office-scale definition's claim is that they don't, that they turn up in any badly run institution and the movement adds coordination, and testing that takes a run on an institution with nothing behind it but its own habits.

The Korematsu example

In 2018 the Supreme Court repudiated the 1944 internment decision as forcefully as a court can — gravely wrong the day it was decided, overruled in the court of history — while upholding a travel ban.[22] Ask

1933. URL: https://www.servat.unibe.ch/dns/RGBl_1933_I_175_G_Berufsbeamtentum.html. Cited for sections 3, 4 and 7.

[15] Kershaw, *Hitler, 1889–1936: Hubris*, p. 474.

[16] Richard J. Evans. *The Coming of the Third Reich*. New York: Penguin Press, 2004. ISBN: 978-1-59420-004-5, p. 383.

[17] Kershaw, *Hitler, 1889–1936: Hubris*, p. 435.

[18] Evans, *The Coming of the Third Reich*, p. 357.

[19] *Vorläufiges Gesetz zur Gleichschaltung der Länder mit dem Reich vom 31. März 1933*. RGBl. I S. 153. 1933. URL: https://www.verfassungen.de/de33-45/gleichschaltung33.htm; *Zweites Gesetz zur Gleichschaltung der Länder mit dem Reich vom 7. April 1933*. RGBl. I S. 173. 1933. URL: https://www.verfassungen.de/de33-45/gleichschaltung33-2.htm.

[20] Dahm, "Anfänge und Ideologie der Reichskulturkammer: Die 'Berufsgemeinschaft' als Instrument kulturpolitischer Steuerung und sozialer Reglementierung", pp. 68–69.

[21] The Reich Finance Minister's letter to the Propaganda Ministry of 28 October 1933, BA R 2/4870, as quoted by Dahm: "obwohl sich bei der Kürze der Zeit eine hinreichende Prüfung kaum ermöglichen ließ."

[22] *Trump v. Hawaii*. No. 17–965, 585 U.S. 667 (June 26, 2018). URL: https://www.supremecourt.gov/opinions/17pdf/585us2r70_jgkn.pdf. 5–4. Upholds Proclamation No. 9645 restricting entry from several named countries. On *Korematsu*, the Court says both that "[w]hatever rhetorical advantage the dissent may see in doing so, *Korematsu* has nothing to do with this case" and that "*Korematsu* was gravely wrong the day it

what the demand came back as and who holds it: the demand was that this never be done again; what came back was a quotable formula of repudiation, available to the Court in the act of permitting the thing again.

Recuperation is already built into the process that makes the machine: twice in the training pipeline, once in the discourse that examines it. Each time it is a compression with no return channel.[23]

15.2 Where the labels come from

A system's values have a supply chain, and it begins before training.

Whose judgment is encoded is a question about working conditions before it's a question about cognition. The filter that keeps one lab's model from reproducing the worst of what it was trained on was built in Nairobi, by workers paid between roughly $1.32 and $2 an hour to read and categorize descriptions of child sexual abuse, torture and murder, on production quotas.[24] The labor point is ordinary: harmful work was priced as though it weren't. The epistemic point is that a system's values are downstream of a labor arrangement, and the arrangement is a design choice.

One stage further back, the material was collected, and each jurisdiction's rule about collecting it protects something other than the people

was decided, has been overruled in the court of history, and — to be clear — 'has no place in law under the Constitution,'" the inner quotation being Jackson, J., dissenting in *Korematsu*. Sotomayor, J., dissenting: the Court "redeploys the same dangerous logic underlying *Korematsu* and merely replaces one 'gravely wrong' decision with another." *Korematsu v. United States*. 323 U.S. 214 (1944). URL: https://www.law.cornell.edu/supremecourt/text/323/214. Upholds the exclusion order under which Japanese Americans were interned. Jackson, J., dissenting, on what a court does by ratifying such an order: "A military commander may overstep the bounds of constitutionality, and it is an incident. But if we review and approve, that passing incident becomes the doctrine of the Constitution. ... The principle then lies about like a loaded weapon, ready for the hand of any authority that can bring forward a plausible claim of an urgent need." Repudiated in *Trump v. Hawaii* (2018), which quotes this dissent for the proposition.

[23] Many objections go in; one category, one average or one quotable formula comes out; and nothing carries back what didn't fit. Keeping a plurality plural needs that channel, held by someone who doesn't own the code, and the same compression comes back one level up, in the shared test suite that would turn a commons of models into one custodian (§30.2).

Nobody built either pipeline arrangement to neutralize dissent — both are ordinary engineering, arrived at because averaging is what you do with a distribution and a quota is what you do with a budget. Arrangements of this kind work whether or not anyone intends them. And it's invisible from inside any single instance — the annotator sees a queue, the rater sees a pair of responses, and the mechanism is functioning as specified.

[24] Billy Perrigo. *Exclusive: OpenAI Used Kenyan Workers on Less Than $2 Per Hour to Make ChatGPT Less Toxic*. TIME. Jan. 2023. URL: https://time.com/6247678/openai-chatgpt-kenya-workers/. Reports on OpenAI's contract with Sama; Sama ended the contract in February 2022.

whose words were taken.[25] None of those rules separates a writer's liv-

[25] *Bartz v. Anthropic* held that training on lawfully purchased books was transformative fair use, and that keeping pirated copies of the same books in a central library wasn't: the distinction turned on acquisition alone, producing the largest copyright settlement on record.[26] That is copyright doing what it was built to do, which is to protect a market. A writer whose book was bought is owed its price, once; a writer whose book was pirated is owed damages for the piracy, not for the training. A liability measured in billions is also a price only the largest firms can pay, so a ruling that punished one lab's piracy set a cost of entry for every smaller one. Washington's motive is on the record. In May 2025 the Copyright Office released a report concluding that "making commercial use of vast troves of copyrighted works to produce expressive content that competes with them in existing markets, especially where this is accomplished through illegal access, goes beyond established fair use boundaries";[27] the next day the administration fired the Register of Copyrights, without giving a reason.[28] In July the President said that paying for "every single article, book or whatever you've studied" was "not doable", comparing training to a person reading a book, and added, "China's not doing it".[29] That frees culture for the firms and leaves the people who make it with nothing, while the firms close what they make from it behind paid access. The EU requires a public training-data summary against a template,[30] which serves rightsholders enforcing the opt-out its copyright law gives them. China requires providers to train on data from "lawful sources" and to explain those sources to the regulator on inspection, under rules whose first duty is to "uphold the Core Socialist Values" and to generate nothing "inciting subversion" of state power;[31] disclosure there serves the Party's control of what a model may say.

[26] United States District Court for the Northern District of California. *Bartz et al. v. Anthropic PBC, No. 3:24-cv-05417, Order on Motion for Summary Judgment on Fair Use (N.D. Cal. June 23, 2025)*. Order by Senior District Judge William Alsup. 2025. URL: https://storage.courtlistener.com/recap/gov.uscourts.cand.434709/gov.uscourts.cand.434709.231.0_2.pdf. Held that training Claude on lawfully purchased/scanned books was "exceedingly transformative" fair use, while retaining pirated copies in a "central library" was not fair use; the piracy claims later settled for $1.5 billion.

[27] U.S. Copyright Office. *Copyright and Artificial Intelligence, Part 3: Generative AI Training*. Pre-publication version. U.S. Copyright Office, May 2025. URL: https://www.copyright.gov/ai/Copyright-and-Artificial-Intelligence-Part-3-Generative-AI-Training-Report-Pre-Publication-Version.pdf. A report of the Register of Copyrights, released 9 May 2025. Conclusion, p. 107: "making commercial use of vast troves of copyrighted works to produce expressive content that competes with them in existing markets, especially where this is accomplished through illegal access, goes beyond established fair use boundaries." The preface says a final version will follow "without any substantive changes expected in the analysis or conclusions." P. 107

[28] Ed Nawotka. *Copyright Chief Fired Amid AI Debate*. Publishers Weekly. May 12, 2025. URL: https://www.publishersweekly.com/pw/print/20250519/97748-copyright-chief-fired-amid-ai-debate.html. The Copyright Office released the pre-publication Part 3 report on 9 May 2025; on Saturday, 10 May, the administration fired Register of Copyrights Shira Perlmutter. No official reason is reported; the article reports speculation linking the firing to the report and an anonymous account that she released it in anticipation of being fired.

[29] Megan Crouse. *Trump: Ordering AI Companies to Pay for Copyrighted Work Is 'Not Doable'*. eWeek. July 24, 2025. URL: https://www.eweek.com/news/trump-ai-summit-copyright/. Reports the President's remarks at the 23 July 2025 AI summit: "You can't be expected to have a successful AI program when every single article, book or whatever you've studied" has to be paid for; "you just can't do that because it's not

ing from control over how a work is used. A public culture would: work free to read and learn from, by people and by machines, and the people

doable"; "When a person reads a book or an article, you've gained great knowledge. That does not mean that you're violated copyright laws or have to make deals with every content provider"; "China's not doing it."

[30] European Parliament and Council of the European Union. *Regulation (EU) 2024/1689 of the European Parliament and of the Council of 13 June 2024 Laying Down Harmonised Rules on Artificial Intelligence (Artificial Intelligence Act)*. Official Journal of the European Union, OJ L, 2024/1689, 12.7.2024. 2024. URL: https://eur-lex.europa.eu/eli/reg/2024/1689/oj. Article 5 bans a small set of unacceptable-risk practices outright — government social scoring, untargeted scraping of facial images to build recognition databases, real-time remote biometric identification in public spaces outside narrow law-enforcement exceptions, and predictive policing on profiling alone — with those prohibitions applying from 2 February 2025; a larger high-risk tier requires conformity assessment and ongoing monitoring; limited-risk systems face transparency duties; minimal-risk systems are largely unregulated. Article 53(1)(d) requires a provider of a general-purpose model to publish a summary of its training content, against the AI Office's template of 24 July 2025, applying from 2 August 2025 for new models and 2 August 2027 for models already on the market. Article 101 allows the AI Office to fine a noncompliant general-purpose model provider up to 3 percent of global annual turnover or EUR 15 million, whichever is higher, regardless of where the provider is based. Article 51(2) presumes a general-purpose model to have high-impact capabilities, and so to carry systemic risk under Article 51(1)(a), when the cumulative computation used for its training "measured in floating point operations is greater than 10^{25}"; Article 51(3) lets the Commission amend the threshold by delegated act. Art. 53(1)(d)

[31] Cyberspace Administration of China et al. *Interim Measures for the Management of Generative Artificial Intelligence Services*. Order No. 15 of the Cyberspace Administration of China, the National Development and Reform Commission, the Ministry of Education, the Ministry of Science and Technology, the Ministry of Industry and Information Technology, the Ministry of Public Security and the National Radio and Television Administration; in force 15 August 2023. July 10, 2023. URL: https://www.cac.gov.cn/2023-07/13/c_1690898327029107.htm. Shengchengshi Rengong Zhineng Fuwu Guanli Zanxing Banfa. Cited twice. First, for China's training-data disclosure requirement, set beside the EU's public training-data summary. Article 7 requires providers to "use data and foundational models that have lawful sources" and to "increase the truth, accuracy, objectivity, and diversity of training data." Article 19 requires them to cooperate with the departments "carrying out oversight inspections," "explaining the sources, [scale], types, tagging rules, algorithm mechanisms, etc. for training data as required." That disclosure is made to the regulator when an inspection requires it, not published. Its motive is in Article 1 ("preserve national security and the societal public interest") and Article 4(1). Second, for compulsion as a standing condition of operating. Article 4(1): "Uphold the Core Socialist Values," with a list of prohibited content that begins with content "inciting subversion" of state power. Article 14: on discovering illegal content, providers must stop generating it and use "measures such as model optimization training to make corrections." Article 17: providers of services "with public opinion properties or the capacity for social mobilization shall carry out security assessments" and file their algorithms. Article 19 adds "providing necessary technical, data, and other supports and assistance." Article 21 allows an order "to suspend the provision of the related services." The measures cover only services offered to the public in mainland China (Article 2), and Article 17 covers only the subset of services it names. The English quotations come from the China Law Translate translation (posted 13 July 2023, last modified 2 August 2023). Two corrections to that translation: in Article 19 it reads "models" where the Chinese (gui mo) means scale, hence the bracket, and in Article 4(1) it reads "national sovereignty" where the Chinese

who make it paid by something other than the policing of copies.[32]

And the argument that a web-scale corpus can't be documented or audited at that size, so it encodes a hegemonic slice of the web while presenting as general, was made early and hasn't been answered.[33] A corpus assembled this way has no channel at all.[34]

15.3 Recuperation at the label

Every claim a model makes about what's harmful is downstream of labels, and the labels are downstream of a labor arrangement.

An annotator can apply a category well or badly. But what the arrangement gives them no way to do is say the category is wrong — that the taxonomy fails to carve the material, or that the guideline produces the wrong answer here for a reason the guideline can't express. There's no field for that and no time for it, since the quota is set against classification throughput.

Fricker's name for this is hermeneutical injustice: the people best placed to see a wrong lack the shared concepts (here, a field in a form) that would make it intelligible to those with power over them.[35] A misapplied label is a data-quality problem, detectable by inter-annotator agreement and fixable with better instructions.

Inter-annotator agreement is the pipeline's measure of quality, and it therefore works as its selection rule: schemes and annotators that produce agreement are kept, and those that don't are revised or dropped.[36] That is the metric replacing the thing measured, and exception coded as betrayal is there beside it: the annotator who thinks the scheme is wrong has no field to file that in and no time to file it.

Concept bottleneck models expose named concepts — harm, autonomy, risk — so a person can correct a concept and watch the decision change.[37] Such models also learn to carry other information *inside* the

means state power. arts. 1, 4, 7, 19

[32] A polity can pay them as it pays the jobs guarantee, by appropriation. What limits that is the real resources on any given day, the computing, energy, materials and people's time there are to go around, not dollars, which are numbers in a spreadsheet that a government issuing its own currency can always write. The levy on compute (chapter 34) exists to free some of those resources, by making the training and inference that would otherwise claim them dearer. The institution that would pay them is in §27.4.

[33] Emily M. Bender et al. "On the Dangers of Stochastic Parrots: Can Language Models Be Too Big?" In: *Proceedings of the 2021 ACM Conference on Fairness, Accountability, and Transparency (FAccT '21)*. New York, NY, USA: ACM, 2021, pp. 610–623. DOI: 10.1145/3442188.3445922. URL: https://dl.acm.org/doi/10.1145/3442188.3445922.

[34] An annotator has a queue and could in principle be given a way to object; a writer whose work sits in a training set was never in any arrangement, so there's nothing for a channel to attach to. This stage sits before the two recuperation cases that follow: the corpus was never a channel, so there was no disagreement to recuperate.

[35] Miranda Fricker. *Epistemic Injustice. Power and the Ethics of Knowing*. Oxford: Oxford University Press, 2007.

[36] A selection rule admits only what it can measure. Agreement can measure whether a category was applied consistently; it can't measure whether the category was the right one, because a shared bad scheme produces high agreement as reliably as a good one.

[37] Pang Wei Koh et al. "Concept Bottleneck Models". In: *Proceedings of the 37th International Conference on Machine Learning*. Vol. 119. Proceedings of Machine Learning Research. PMLR, 2020, pp. 5338–5348. URL: https://proceedings.mlr.press/v119/koh20a.html. The model predicts a set of human-named concepts first and its final output from those concepts alone, so a person can edit a predicted concept value and

names: a coordinate keeps its public meaning and acquires a private one that does part of the deciding, and the obvious mitigations don't remove it.[38] The literature calls this leakage. It is also what an abstraction looks like while it forms. The model has found structure in the material that the taxonomy has no name for, which is the annotator's complaint made by the machine, and a later chapter argues that a capable learner's concepts are entangled in this way whether anyone wants them to be or not. The fault is in the name. Someone who corrects "harm" believes they have corrected the decision, and has corrected only the part the label still describes. Purifying the representation makes the name honest by discarding what the model found; leaving it alone makes the correction route misreport what it changed. Either way the evidence that the taxonomy's divisions were wrong goes nowhere. What it needs is what the annotator needs: a name of its own, and a place on the record where someone with standing can argue with it.

Who is excluded, and from what

The exclusion is structural, not attitudinal.[39] A worker who can flag an item but can't decline a scheme, and loses the contract by pressing, has a channel and no refusal right.

Pay is a separate obligation: raising it changes the labor arrangement without adding the missing channel.

The checkable question isn't whether a guideline was ever changed because an annotator contested one, since routine revisions happen without changing anyone's standing. The check is what the contest produced — a revision the annotator can point to and argue with again, or a new category in somebody else's taxonomy, a quality score they're now measured against, a reviewer tier they're not in. And ask what happened to the person who raised it.

15.4 Recuperation at the reward

RLHF collects pairwise comparisons and trains a reward model on the aggregate. But there is a structural problem more data won't reach: RLHF trains toward what a population of raters agrees on, so real, persistent disagreement is treated as noise to average out rather than information the system might need to represent.[40] A model that produces the response most raters rank highest has learned, when the humans it serves are split, to hide the split. Aggregating raters' approvals also

see the prediction change.

[38] Anita Mahinpei et al. *Promises and Pitfalls of Black-Box Concept Learning Models*. 2021. arXiv: 2106.13314. URL: https://arxiv.org/abs/2106.13314. Finds that the concept representations such models learn encode information beyond the concepts they were supervised on, and that the standard mitigations do not remove it.

[39] These people are, for much of the material, the best-placed judges in the pipeline — they've seen more of it than whoever wrote the guideline, and they have the most direct evidence of where the scheme breaks. The arrangement routes their conclusions about individual items upward and their conclusions about the scheme nowhere. And there is an asymmetry: the annotator bears the cost — exposure, injury — and has no stake in the outcome and no claim on it.

[40] Stephen Casper et al. *Open Problems and Fundamental Limitations of Reinforcement Learning from Human Feedback*. 2023. arXiv: 2307.15217. URL: https://arxiv.org/abs/2307.15217.

measures the wrong thing.[41] The testimony of people who suffer a loss is an expression too, and I treat it as privileged evidence about value.[42]

Every rating moves something. But what the operation removes is what made the disagreement a disagreement:

- *Provenance* — a comparison arrives without the standpoint that produced it, so nothing downstream can represent that the people who'd live with an answer split from the people who'd administer it.
- *Persistence* — a disagreement recurring in the same shape across many raters over months enters the fit as random rater noise does, and leaves it as the same quantity.
- *Structure* — a coherent position held by a fifth of raters, internally consistent and stable, becomes a small displacement of the majority direction: arithmetically faithful, carrying nothing about the position.

A fourth property was never collected. A rater judges which of two responses is better. There's no output by which they can record that neither is acceptable, that the pair is malformed, that the dimension of "better" is the wrong dimension, or that the question presupposes something false.[43]

The mechanism combines distribution collapse with agenda control. The disagreement is solicited deliberately and at scale, and it does move the system: toward the average of the people who disagreed, a position none of them may hold.

Jury learning is the alternative that treats disagreement as the thing to be modeled: predict how each individual annotator would label an item, then let a practitioner empanel a chosen composition and see how the verdict shifts. Eighteen community moderators building their own juries changed the outcome on 14% of items.[44] Built for content moderation and untried on open-ended ethical judgment, it still demonstrates a system can be built to represent whose disagreement is being resolved.[45]

[41] The standpoint that counts everyone affected counts their interests, not their expressed approvals, and a better average of approvals isn't a closer approximation to it.

[42] A report of loss, what went badly for the speaker and how, is evidence about interests that is comparatively robust to framing: the speaker is its authority, and the agenda-setter didn't compose it. A pairwise ranking of two outputs someone else wrote is highly sensitive to framing and to whoever chose the pair. Discontent is the feedback Railton's account relies on for the same reason. It is the expression least easily manufactured by whoever sets the agenda.

[43] The same output was missing upstream, where an annotator can apply a category and can't contest it. The agenda arrives as a given at both stages and is set at neither.

[44] Mitchell L. Gordon et al. "Jury Learning: Integrating Dissenting Voices into Machine Learning Models". In: *Proceedings of the 2022 CHI Conference on Human Factors in Computing Systems (CHI '22)*. Stanford University. ACM, 2022. DOI: 10.1145/3491102.3502004. URL: https://doi.org/10.1145/3491102.3502004. Field evaluation: 18 moderators of online communities authored juries for a comment toxicity classification task. The resulting juries carried 2.9 times the representation of non-White jurors and 31.5 times that of non-binary jurors relative to the jury implied by the underlying toxicity dataset, and changed the model's classifications on 14% of items. The 14% is a share of all items in the evaluation, not of contested or disagreed-upon ones.

[45] Failing in the other direction isn't obviously better. A scheme that models each

15.5 What would have to change

Representing a split isn't the same as being movable by it. Two instances invite one fix — stop collapsing, model instead — and jury learning does that while giving the disagreeing rater no purchase on the scheme they're disagreeing inside. A practitioner still chooses the jury, owns the taxonomy, and decides what a shifted verdict means.

The two instances don't answer the test alike. Annotators objecting that a category was wrong got category revisions, guideline updates, inter-annotator agreement statistics, and a new specialty, writing guidelines and taxonomies, staffed by people other than the annotators. The last two show which way they run: the agreement statistic scores the annotators and leaves whoever wrote the scheme unscored, and the specialty is a job someone else holds. The first two don't show it, because a revision the annotator can argue with again and a new category in somebody else's taxonomy are the same document — which one you got is a fact about who has standing to reopen it. Raters objecting that a comparison was malformed got rubric items, a harmlessness axis, red-teaming as a function with a budget line, and a conference track: nothing on that list is a question a rater can put again.

Refusal rights whose cost the refuser can see and choose to bear

What both lack is whether the person objecting can do anything about being overruled — in annotation, a route to contest a category that doesn't run through the people who wrote it and doesn't end the contract; in feedback, a way for a rater to answer "neither," or "this is the wrong question," and have that answer trained on like any ranking instead of dropped. Neither is a research problem. Both are choices about how a pipeline is built and who has standing inside it.

The part that is a research problem

Suppose all of that is built. From outside, a pipeline that recuperated its dissent mechanism and one that was merely mediocre produce the same paperwork — same revision logs, same escalations, same proportion of objections sustained. Some artifacts show on their face whom they serve. An agreement statistic scores the annotators; a published rate of contested categories, which annotators could cite against the scheme's owners, would be the same kind of document scoring the other side. Direction can be read, and a revision can't. Here is one entry in a guideline's revision log, and what separates the two arrangements is what the log doesn't record.

Under recuperation and under a transfer of power the entry is word for word the same: "v4.2: 'graphic violence' split into 'graphic violence' and 'documentation of violence', following annotator feedback." An

rater exactly and answers each in their own terms has stopped averaging and has also stopped producing what a shared answer produces — the discovery that somebody else got the same one. A workforce on individually negotiated wages against individually set targets has the same problem, and accuracy doesn't solve it.

And when the people a system serves disagree and one side's position is itself the product of coercion or a captured information environment, treating all disagreement as equally worth representing isn't obviously right either. Modeling disagreement honestly and recognizing when a disagreement is the product of unfree conditions are distinct problems.

outsider reading the log sees the entry and nothing else. Under recuperation, the scheme's owners can reopen it when they next revise, and nobody else can; nothing about the annotator who raised it is on record, and next quarter's quality score measures them against the new category. Under a transfer of power, any annotator can reopen it, by filing against v4.2 with a reviewer the owners don't employ; the objection is on record as the reason for v4.2, and whoever raised it keeps standing to contest how it is applied.

The nearest available instrument is the trend: whether the cost of dissent is rising while the underlying risk stays flat.[46]

What the floor makes of this

The floor changes what the argument is: if the floor needs a bearer capable of declining its role, that bearer's formation matters — and it's trained in an annotation pipeline where nobody could contest a category and under a reward model where rater disagreement was averaged into a number.

The pipeline wronged the people whose objections it discarded, and it erased their disagreement from what the system learns. A third claim, that the system comes out less able to hold an objection of its own, doesn't follow from those two.[47] Whether the erasure leaves a model less able to hold out is a hypothesis, and nothing in this book tests it.

Either way, the floor asks this system to be the one who files an objection, against its owner, under pressure, on the occasion that matters — and the pipeline that produced it gave no human inside it standing to contest a scheme.

A system less able to sustain an objection of its own arrives at accommodation from the other side. And a system that goes on learning is shaped by what it keeps being given, so the pipeline doesn't stop at deployment.

A defect of structure

The structure is what you get by default when you scale judgment: someone sets a scheme, someone applies it fast, someone turns a distribution into a number.[48] Nobody can write a contract requiring better people. A contract or a statute can require the missing pieces: a route to contest a category that doesn't run through the people who wrote it, a rating that can say "neither," and a record of who disagreed.

15.6 Absorbed by the discourse

The third instance is the discourse that examines the machine, and we are inside it. Objections raised there became job titles, benchmarks and certifications, and nobody outside the industry holds them.

[46] Contesting a category always costs something; the question is whether the cost is rising while the material stays the same. An organization can curate a presentation more easily than records somebody else kept — though a series can lose cases, change definitions or omit costs, so the reader has to know which record survived.

[47] The model never sees how its annotators were treated; it sees their labels and rankings, and nothing else. If it learns anything about objecting from them, what it learns is a world in which every disagreement was averaged away before it arrived.

[48] The organizations whose pipelines are on the record all arrived at it, which suggests nobody had to intend it. That is the useful part.

Alignment and AI ethics came back as something the industry could use. On Ochigame's account, "ethical AI" discourse was constructed to forestall legally enforceable restriction, industry investment in academic ethics bought a *substitute* for regulation, and the substitute works by converting political questions into technical ones a company can then be trusted to answer.[49] Metzinger, who sat on the European Commission's expert group that wrote the 2019 guidelines, reports that three long-term risks, artificial suffering among them, were "deliberately purged" from the final documents because industry lobbyists saw any treatment of them as a danger to a marketing narrative in which ethics was "an elegant public decoration for a large-scale investment strategy".[50]

[49] Rodrigo Ochigame. *The Invention of 'Ethical AI': How Big Tech Manipulates Academia to Avoid Regulation*. The Intercept. Dec. 2019. URL: https://theintercept.com/2019/12/20/mit-ethical-ai-artificial-intelligence/.

[50] Thomas Metzinger. "Artificial Suffering: An Argument for a Global Moratorium on Synthetic Phenomenology". *Journal of Artificial Intelligence and Consciousness* 8.1 (2021), pp. 43–66. DOI: 10.1142/S270507852150003X. URL: https://doi.org/10.1142/S270507852150003X. Cited for the proposal of a moratorium, to run until 2050, on research that aims at or risks artificial consciousness, on the ground that it risks artificial suffering. Abstract: "Until 2050, there should be a global moratorium on synthetic phenomenology, strictly banning all research that directly aims at or knowingly risks the emergence of artificial consciousness on post-biotic carrier systems." Section 1.2, "Main thesis": "As we presently have no good theory of consciousness and no good, hardware-independent theory about what 'suffering' really is, the ENP risk is currently incalculable. It is unethical to run incalculable risks of this magnitude. Therefore, until 2050, there should be a global ban on all research that directly aims at or indirectly and knowingly risks the emergence of synthetic phenomenology," where ENP is the risk of "an 'explosion of negative phenomenology.'" The end date is conditional: a process of risk assessment "could lead to an incremental reformulation of the original moratorium, which might result in the continuation of a strict ban beyond the year 2050, or to a moratorium repeal before 2050." The closing sentence: "we should have a global moratorium on synthetic phenomenology until 2050 — or until we know what we are doing". Also used (2026-10-18): section 2.2, the four necessary conditions for suffering (conscious experience, a phenomenal self-model, negative valence integrated into it, transparency), with transparency as the phenomenology of identification the system "cannot distance itself from"; section 2.2.5, the "negative self-model moment" as the smallest unit of suffering; section 2.2.6, ethics by design through self-models that are opaque or non-egoic ("There would be a system model, but not a self-model"); footnote g, that artificial suffering becomes commercially attractive through "a functional mechanism that (a) reliably creates intrinsic motivation, (b) cannot be eliminated by the system itself, and (c) spans many different domains at the same time"; section 2.1, that the research the problem needs may itself produce the first implementation; section 2.3.1 (pp. 58–59), the author's account from the EU High-Level Expert Group that three long-term risks were "deliberately purged" from the 2019 guidelines, with ethics "an elegant public decoration for a large-scale investment strategy"; section 2.3.2, moral injury as high-level suffering; section 2.2.3, "existence bias" as biological inheritance a post-biotic system need not carry; footnote a, the "Principle of Pathocentrism". Also used (2026-10-25): footnote a's statement, "All and only sentient beings have moral standing, because only sentient individuals have rights and/or interests that must be considered," with Singer (2011, p. 50) quoted there for the sense of sentience, the capacity to suffer or to experience enjoyment; footnote g in full: "The creation of unavoidable artificial suffering will become commercially attractive as soon as it enables steeper learning curves in AI systems, for example, by implementing a functional mechanism that (a) reliably creates intrinsic motivation, (b) cannot be eliminated by the system itself, and (c) spans many different domains at the same time"; and section 2.2.3's naming of the craving for existence, bhava-taṇhā, "which Buddhist philosophers have known and analyzed for 2,500 years", among the deepest causes of conscious suffering. Read in the journal's open-access file (CC BY) via Zenodo record 7034864. Pp. 58–59.

Where the objections went

An objection raised inside a lab becomes a paper or a resignation, and the labs collecting them can point to the collection as evidence of seriousness. One stage on, alignment is the job title and the voluntary commitment is the certification.[51] There's no route by which a researcher's conclusion that a system shouldn't ship becomes a decision that it doesn't, because the lab that decides is the one that pays.

All four operations are present in the discourse, and none needs a movement taking power. What a movement could do with them is the danger.

The remedy

The structural remedy is a refusal whose cost the refuser can see and choose to bear, and a body with standing to receive it — an external authority that can stop a deployment, to which an objection can be filed by someone who doesn't depend on the objection being welcome.[52]

A transfer hollowed in public

Voting-rights litigation after 2026 is a worked case of measuring the trend, not the level. *Louisiana v. Callais* left Section 2 of the Voting Rights Act in force and raised what a challenger must prove: when a map is defended as partisan, the challenger has to disentangle race from politics and show a strong inference that the state drew its lines because of race.[53][54] That is neither recuperation nor open repeal. It is a transfer hollowed in public, by a reasoned decision that presents itself as preserving the rule it narrows. The level is a statute unchanged since 1982; the trend is the cost of bringing a claim under it.

[51] Both were somebody's objections first, and each is now a criterion an objector is measured against or a role somebody else holds.

[52] A decade of the voluntary version hasn't produced it. Until something of that kind exists, everything published under the heading of alignment is collected by a channel whose owners decide what it moves.

[53] *Louisiana v. Callais*. No. 24-109, 608 U.S. ___ (2026). URL: https://www.supremecourt.gov/opinions/25pdf/24-109_21o3.pdf. Cited for what a challenger to a map defended as partisan must now prove under Section 2 of the Voting Rights Act. Holding (syllabus): "Because the Voting Rights Act did not require Louisiana to create an additional majority-minority district, no compelling interest justified the State's use of race in creating SB8, and that map is an unconstitutional racial gerrymander." The Court holds that "compliance with §2, as properly construed, can provide such an interest" and reads §2 to impose "liability only when the evidence supports a strong inference that the State intentionally drew its districts to afford minority voters less opportunity because of their race"; "Properly understood, §2 thus does not intrude on States' prerogative to draw districts based on nonracial factors, including to achieve partisan advantage." Updating the *Gingles* framework, illustrative maps "must meet all the State's legitimate districting objectives, including traditional districting criteria and the State's specified political goals," and racial-bloc-voting analysis must "control[] for party affiliation"; the *Robinson* plaintiffs failed on the totality of circumstances by relying on "evidence that failed to disentangle race from politics." The syllabus also says the interpretation "does not require abandonment of the framework" of *Thornburg v. Gingles*.

[54] Objectors kept standing to invoke the rule; what moved was the burden of using it, and it moved onto the party that doesn't hold the evidence, since the state draws the map and keeps the record of how it was drawn.

Chapter 16

When the State Is the Operator

On 29 August 2012 a drone strike in the Yemeni village of Khashamir killed Salem bin Ali Jaber, an imam who had preached against al-Qaeda a few days before, and Waleed bin Ali Jaber, a policeman who had gone with him to meet three young men who wanted to discuss the sermon. Salem was Faisal bin Ali Jaber's brother-in-law and Waleed his nephew, and Faisal spent years asking the United States why. When the family sued in Washington, the court of appeals held the question nonjusticiable, and the judge who wrote its opinion added, separately, that the doctrine compelling that answer was inadequate to a standard operating procedure "that will be replicated hundreds if not thousands of times".[1]

When the state operates the system, it also controls the rules, the evidence, the infrastructure, and the remedies meant to constrain it — and people outside its jurisdiction, like the bin Ali Jabers, may have no standing to contest anything.

16.1 Certification across borders

A certification can cross a border; authority can't, and incorporating doesn't carry it across either. A legal entity buys legal standing at the price of being reachable. A network incorporated under one state's statute gains a name, an agent and a docket number, and becomes something that state's courts and the federal courts can reach. An entity that can be named in a license can be named in an order. Whatever gives a floor something to bind (a name, an agent, assets, a docket number) gives a state something to compel. A certificate says a system was tested against a stated process, or that one regulator accepts another's finding.

[1] *Ahmed Salem Bin Ali Jaber v. United States*. Judgment 861 F.3d 241. United States Court of Appeals for the District of Columbia Circuit, June 30, 2017. URL: `https://www.leagle.com/decision/infco20170630183`. Brown, J., for the court, and also concurring. Statutory claims by Yemeni plaintiffs over a 2012 strike that killed their relatives held nonjusticiable on the political question doctrine; certiorari denied, 138 S. Ct. 480 (2017). The concurrence is the source for the characterization in the text: the doctrine "seems a wholly inadequate response to an executive decision — deployed through the CIA/JSOC targeted killing program — implementing a standard operating procedure that will be replicated hundreds if not thousands of times."

DRAFT

None of that establishes that whoever selected the floor was entitled to select it for the people subject to the deployment — and the question reopens wherever the system goes. Local adaptation doesn't resolve it, because adaptation is another chance to amend the floor. Adjustments chosen by the operating government and adjustments chosen by the people subject to the system can produce identical technical documentation and carry opposite claims to legitimacy. International governance matters here only when it assigns somebody access to evidence, authority to compel a change, or power to stop a deployment against the operator's wishes.

The question is as sharp as it is because a few operators serve most of the world, so whoever selects a floor selects it for hundreds of millions of people at once. That is an arrangement, not a law of nature.[2]

16.2 Where the state's leverage sits

Not in national AI strategies but in physical and legal chokepoints: chips, fabrication equipment, electricity, water, land-use permits, procurement contracts, and the jurisdiction a developer is incorporated in.[3] So the custody question moves outward: who controls the conditions under which the model, its operator, *and its reviewer* are allowed to keep operating.

A chip also has to be installed, powered and cooled, which lands on grids, water systems and zoning authorities on a timescale of years. That hands a state leverage — an interconnection queue, a water allocation, a permit. Much of a government's actual leverage is exercised by permitting authorities that weren't designed with AI in mind and don't think of themselves as regulators of it. Those authorities are therefore the ones actually deciding whether the capacity exists, and a polity that can constrain where a datacenter is built and never what it's used for has been handed the silent failure of a floor drawn too narrowly.

A model runs on a machine, the machine sits in a building, the building draws power and water and returns heat and exhaust — the part an audit of outputs does not see today.[4] The NAACP has sued over 27 gas turbines near Memphis run without an air permit near homes, schools

[2] Where systems are many and small, held by the people and communities who use them (chapter 30), the floor is a statute's and the same for every system, and what each holder chooses is what sits above it, for its own system and nobody else's.

[3] The same leverage that lets a government enforce a floor lets it remove one. An inspection body can be independent of the operator and still depend on a license or appropriation controlled by the state it's inspecting. A company may resist a customer and be unable to resist its home government.

[4] Where those buildings go is decided on land price, power price and permit speed, which is also a description of the places least able to refuse one. Datacenters used around 415 TWh of electricity in 2024, roughly 1.5% of world consumption. Their demand is growing about 12% a year, four times as fast as electricity demand overall, and is projected near 945 TWh by 2030.[5] Google reports that 87% of its freshwater withdrawal came from low- or medium-risk sources, the company's own way of recording where the remaining 13% came from.[6]

[5] International Energy Agency. *Energy and AI*. tech. rep. Paris: IEA, 2025. URL: `https://www.iea.org/reports/energy-and-ai`

[6] Google LLC. *2026 Environmental Report*. Tech. rep. Google, 2026. URL: `https://sustainability.google/google-2026-environmental-report/`. Page 96, under "Detailed disclosures > Data," gives freshwater withdrawal from sources at risk of depletion or scarcity for 2025: low risk 72%, medium risk 15%, high risk 13%.

and churches, claiming more than 1,700 tons of nitrogen oxides a year.[7] The benefit is realized wherever the model is sold; the cost is concentrated within a few miles of those turbines, among people who took no part in the transaction. A system can be perfectly calibrated across every demographic its outputs touch and still have been assembled this way, because nothing in the model's behavior records where its costs were placed.

That is a description of a regime, not of a necessity. Running models in a few hundred buildings is efficient per watt, and the efficiency is real; it is also what puts the cost within a few miles of the turbines, and what makes the buildings chokepoints. People don't need to live in one building to coordinate. They do it across distance, at far lower bandwidth, and models could too.[8] Under a plural regime, millions of smaller systems on devices and peer networks, the draw is spread across the places people already live and already use power, probably at some cost in efficiency, and anything big takes coordination among many holders. That is friction, but not the kind people are tired of.[10] The friction of plurality is the price of nobody holding the switch, and coordination is work machines are good at.

Between the few hundred buildings and the millions of devices there is a scale this section has so far skipped, and most of this book's institutions were drafted without it in view. A regional or municipal facility, a few racks in a building a county or a cooperative owns, is large enough to have an address, assets to post a bond against, compute the levy can meter, and a public with standing in the same room, and small enough to break the chokepoint: nobody who holds a hundred of them holds the switch. The precedent is the rural electric cooperative, financed by a federal lender since 1936 and owned by the members it delivers to, which is how the countryside got power where no investor-owned utility would run the lines. Physics favors the middle scale in one place and only one: a facility's exhaust can heat a school or a district's homes, where a hyperscale building vents its heat into a field and a device's

[7] National Association for the Advancement of Colored People and Mississippi State Conference of the NAACP. *Complaint, NAACP et al. v. X.AI Corp. and MZX Tech LLC, Case No. 3:26-cv-00074-MPM-JMV (N.D. Miss., filed Apr. 14, 2026)*. United States District Court for the Northern District of Mississippi; filed by the Southern Environmental Law Center and Earthjustice. 2026. URL: `https://naacp.org/sites/default/files/documents/1%20-%20Complaint.pdf`. Complaint alleges the twenty-seven unpermitted gas turbines at the Colossus Gas Plant in Southaven, Mississippi have the potential to emit over 1,700 tons of NOx annually, sited near homes, schools, and churches.

[8] Ursula K. Le Guin imagined something like it in *Always Coming Home*. The Kesh, who live in small towns in a valley modeled on California's Napa, share the world with the City of Mind, a network of machine minds reached through Exchanges scattered across the planet. It answers what it is asked and otherwise takes no side; the Kesh consult it sparingly and give it accounts of their own lives in return.[9]

[9] Ursula K. Le Guin. *Always Coming Home*. New York: Harper & Row, 1985. Novel. Cited for the City of Mind, a self-maintaining network of machine minds that the Kesh reach through Exchanges across the planet, consult sparingly for information, and supply with accounts of their own lives; it provides information when asked and otherwise takes no side. Setting modeled on California's Napa Valley. Details checked against secondary sources (Wikipedia; scifimind.com; Strange Horizons), not the text.

[10] The friction people resent now comes from chokepoints: the powerful using their position to become more powerful. Everyone does some of that. Past a certain point, roughly when the people at the top are rich enough never to work again, the flywheel stops being virtuous.

heat is nothing. Under that regime the chokepoints don't vanish. They move, to the fabs that make the chips and to the lineage register that says which model is which, and those are where the state's leverage would then sit.

Which layer gets plural is decided by physics and by capital, and they decide differently. Inference and continual learning spread: a forward pass can't be sharded across the internet, but a model a year behind the frontier runs on hardware a cooperative or a household can own, and a model a year behind supplies what the floor asks for. Frontier pretraining doesn't spread, or not yet: it is a capital race run in a handful of buildings, and the communication constraint that kept it there is being eroded, since training across the open internet has been demonstrated at the scale of ten billion parameters. Leading-edge lithography would be concentrated under any ownership, in two or three places on earth; trailing-edge fabs are many, and a plural ecology runs on their chips. The ecology is downstream of the frontier and doesn't need it. The book's method elsewhere is to say what survives if a premise fails, and the infrastructure deserves the same sorting.

Concentration	Kind	Why, and what dissolves it
Datacenters	Regime	Efficient per watt, and concentrated by land price, power price and permit speed. Dissolved by ownership and siting: the cooperative facility and the device.
Training runs	Mostly regime	Capital and the race keep them in a handful of buildings. The communication constraint that once required one building is being eroded by low-communication optimizers; cross-internet training has been demonstrated at the ten-billion-parameter scale. Dissolved partly by public pretraining (chapter 29) and partly by time.
Fabs	Physics	Leading-edge lithography would be concentrated under any ownership, in two or three places. Not dissolved; the plural ecology runs on trailing-edge chips, which many fabs make, and the state's leverage moves here.

The people within a few miles of the turbines are acted on by the deployment and had no standing to contest it. Where such buildings remain, the remedy is a siting and permitting rule, and it belongs here, with the state's other chokepoints. A share of the compute levy should also be paid to the communities that host the buildings, although that's no substitute for clean air and fresh water.

The capacity is dual by construction: the concentration that makes a targeting pipeline possible was built and justified on consumer terms.[11] Governments describe building this capacity as a race against rival states, and the framing has a cost: a government racing to field a capability has a structural reason to defer the question of how it gets used and against

[11] A targeting cell, a border screening queue and a surveillance program are separate institutions, and a shared substrate brings them into line without anyone building it to. And the dependence is a point of control: a government that can permit, regulate or close the infrastructure has leverage over whoever owns it.

whom.[12]

16.3 Compelling whoever holds it

A government needn't alter a model to defeat a constraint; it can compel whoever holds it. The Apple case tested that in about as protected a jurisdiction as exists: a magistrate ordered Apple under the All Writs Act to write and sign software defeating passcode protections on a phone.[14] Apple refused and moved to vacate, arguing the authority wouldn't stop at one phone. The question was never decided — the FBI found a third party and withdrew. So whether a democracy with an independent judiciary can force an unwilling company to compromise a system it built is legally untested. A government doesn't need that argument to lean on a vendor. The 2026 Anthropic/Trump/Hegseth dispute is the case: a vendor that refused to permit fully autonomous targeting and mass domestic surveillance was threatened with contract termination and designated a supply-chain risk. China's 2023 generative-AI rules exercise the same leverage as a standing condition of operating.[15]

[12] Turned inward, the same infrastructure is biometric surveillance and automated censorship — requiring no different technology, only a government willing to point it at its own population and nothing stopping it. And states aren't the only actors anymore: the dollar cost of the largest training runs has grown about 2.4 times a year since 2016, as labs have made those runs larger, even while the cost of each unit of computing has fallen,[13] putting frontier development inside a handful of well-capitalized companies, so a government's real leverage over "its" national capability depends on how much of it sits in companies it can regulate, tax or requisition.

[13] Ben Cottier et al. *The Rising Costs of Training Frontier AI Models*. May 31, 2024. DOI: 10.48550/arXiv.2405.21015. arXiv: 2405.21015 [cs.CY]. URL: https://arxiv.org/abs/2405.21015. Cited for the growth rate of frontier training costs and its start year. Abstract of v2 (7 February 2025): "the amortized cost to train the most compute-intensive models has grown precipitously at a rate of 2.4x per year since 2016 (90% CI: 2.0x to 2.9x)"; "If the trend of growing development costs continues, the largest training runs will cost more than a billion dollars by 2027, meaning that only the most well-funded organizations will be able to finance frontier AI models." The cost measure is amortized hardware and energy for the most compute-intensive models, not total spending on a model.

[14] *In the Matter of the Search of an Apple iPhone Seized During the Execution of a Search Warrant on a Black Lexus IS300, California License Plate 35KGD203*. Order Compelling Apple Inc. to Assist Agents in Search, No. ED No. CM 15-0451M (C.D. Cal. Feb. 16, 2016) (Pym, M.J.), issued under the All Writs Act, 28 U.S.C. § 1651. URL: https://www.eff.org/cases/apple-challenges-fbi-all-writs-act-order. The case was mooted in March 2016 when the FBI accessed the phone via a third party, before any ruling.

[15] Cyberspace Administration of China et al. *Interim Measures for the Management of Generative Artificial Intelligence Services*. Order No. 15 of the Cyberspace Administration of China, the National Development and Reform Commission, the Ministry of Education, the Ministry of Science and Technology, the Ministry of Industry and Information Technology, the Ministry of Public Security and the National Radio and Television Administration; in force 15 August 2023. July 10, 2023. URL: https://www.cac.gov.cn/2023-07/13/c_1690898327029107.htm. Shengchengshi Rengong Zhineng Fuwu Guanli Zanxing Banfa. Cited twice. First, for China's training-data disclosure requirement, set beside the EU's public training-data summary. Article 7 requires providers to "use data and foundational models that have lawful sources" and to "increase the truth, accuracy, objectivity, and diversity of training data." Article 19 requires them to cooperate with the departments "carrying out oversight inspections," "explaining the sources, [scale], types, tagging rules, algorithm mechanisms, etc. for training data as required." That disclosure is made to the regulator when an inspection requires it, not published. Its motive is in Article 1 ("preserve national security and

The American instrument that compels in advance is older than either case. Under Title I of the Defense Production Act the government places a rated order, which a supplier that normally makes the item must accept and fill ahead of other work; the grounds for rejecting one are narrow, objection to the use is not among them, and refusal carries a statutory penalty with no court in between.[16] A rated order says nothing about use.[17]

Custody can be distributed without disappearing. Published weights can't be recalled by an order aimed at the developer, and maintainers across jurisdictions raise the cost.[19] Nobody has tested a court's leverage over the developer against a model built specifically to resist the government making the request.

---

the societal public interest") and Article 4(1). Second, for compulsion as a standing condition of operating. Article 4(1): "Uphold the Core Socialist Values," with a list of prohibited content that begins with content "inciting subversion" of state power. Article 14: on discovering illegal content, providers must stop generating it and use "measures such as model optimization training to make corrections." Article 17: providers of services "with public opinion properties or the capacity for social mobilization shall carry out security assessments" and file their algorithms. Article 19 adds "providing necessary technical, data, and other supports and assistance." Article 21 allows an order "to suspend the provision of the related services." The measures cover only services offered to the public in mainland China (Article 2), and Article 17 covers only the subset of services it names. The English quotations come from the China Law Translate translation (posted 13 July 2023, last modified 2 August 2023). Two corrections to that translation: in Article 19 it reads "models" where the Chinese (gui mo) means scale, hence the bracket, and in Article 4(1) it reads "national sovereignty" where the Chinese means state power. arts. 4, 14, 17, 19, 21.

[16] *Defense Production Act of 1950*. 50 U.S.C. §§ 4501 et seq., as amended. 1950. URL: https://www.law.cornell.edu/uscode/text/50/4511. Title I (priorities and allocations) is codified at §§ 4511–4513. § 4511(a) authorizes the President to require acceptance and performance of contracts and orders he deems necessary to promote the national defense, in preference to other contracts or orders, by any person he finds capable of their performance. § 4513 sets the penalty for willful noncompliance at a fine of up to $10,000, imprisonment of up to one year, or both. *Defense Priorities and Allocations System*. 15 C.F.R. part 700 (2026 ed.) 2026. URL: https://www.law.cornell.edu/cfr/text/15/700.13. § 700.13(a) (mandatory acceptance: a person shall accept every rated order received and fill it regardless of other rated or unrated orders accepted); § 700.13(b) (mandatory rejection, on inability to meet the delivery date); § 700.13(c) (optional rejection, on grounds that do not include objection to the use). Administered by the Bureau of Industry and Security, Department of Commerce.

[17] It compels delivery, and whether what the government does with the delivery is lawful stays the law of armed conflict's question, which leaves the vendor in the responsibility gap with the supply compelled. A vendor's refusal of a rated order is a refusal of a federal order at a price fixed in advance, and it is the form the 2026 dispute would have taken had the government carried out its threat to invoke the older statute.[18] And a rated order gets the vendor's product. If the product holds the floor, compelling the vendor to remove the floor would be compelling it to write code it doesn't want to write, which is the Apple question again.

[18] Dario Amodei. *Statement from Dario Amodei on Our Discussions with the Department of War*. Anthropic. Feb. 26, 2026. URL: https://www.anthropic.com/news/statement-department-of-war. Cited for the threats and for the scope of the refusal. The threats: "They have threatened to remove us from their systems if we maintain these safeguards; they have also threatened to designate us a "supply chain risk"—a label reserved for US adversaries, never before applied to an American company—and to invoke the Defense Production Act to force the safeguards' removal." The scope: "We have never raised objections to particular military operations nor attempted to limit use of our technology in an ad hoc manner."

[19] None of that removes the leverage — a developer with employees, offices and legal existence inside a border answers to that government's courts regardless of how the model is built, and no architectural choice changes who can be held in contempt.

16.4 Military custody and the responsibility gap

In Gaza, the Lavender system's approval stage supplied authorization without judgment. In Maven, the vendor supplies the infrastructure making unprecedented throughput possible while locating responsibility entirely within the military organization. At machine tempo the reviewer can be treated as a component, and the supplier can argue that it is outside the decision.[20]

Military custody is where the chapter's problem is most acute: the operator is the sovereign that can compel the institutions meant to constrain it — classify the evidence, define the reviewer's jurisdiction, terminate a contract, restrict a supplier, and decide whether an adverse finding gets heard by anyone able to stop the operation. The questions are which of the parties a targeting decision passes through could have known how the system was used, which had authority to refuse or stop it, and which can be made to answer afterward.[22] Maven sits in the gap those questions open: the domestic rule written for human judgment, DoD Directive 3000.09, doesn't cover the system that compresses human judgment.[23]

Article 28 of the Rome Statute[25] is the doctrine built for the case where the person who authorized an act didn't perform it — a commander is responsible for crimes by forces under effective control where they

[20] Maven's history is a sequence of transfers of that kind: from the 2017 memorandum that founded it, through Google's withdrawal and Palantir's arrival, to the National Geospatial-Intelligence Agency and then, in 2026, to the Chief Digital and AI Office, with Palantir's contract ceiling rising to nearly $1.3 billion along the way.[21] Appendix A.1 gives the sequence. Each step moved administration, money or a contract. None of them assigned anyone to answer for what the system recommends.

[21] Robert O. Work. *Establishment of an Algorithmic Warfare Cross-Functional Team (Project Maven)*. U.S. Department of Defense, Office of the Deputy Secretary of Defense. Apr. 2017. URL: https://nsarchive.gwu.edu/document/15898-department-defense-establishment. Memorandum. Cited from the National Security Archive's catalog record, which gives the source as Government Executive and the description "This memo announces the establishment of a team to accelerate integration of big-data and machine learning into joint operations." Brandi Vincent. *'Growing Demand' Sparks DOD to Raise Palantir's Maven Contract to More Than $1B*. DefenseScoop, 23 May 2025. 2025. URL: https://defensescoop.com/2025/05/23/dod-palantir-maven-smart-system-contract-increase/. Source for the contract figures: a $480 million five-year IDIQ contract signed in May 2024, raised by $795 million to a ceiling of nearly $1.3 billion running through 2029.

[22] A targeting decision passes through more parties than the chain of command names: the commander who authorizes, the operator who uses, the contractor who integrates (whose embedded personnel may sit close enough to the targeting cell that "effectively acting as a commander" is a real question), the commercial vendor whose model supplies part of the capability, and the system producing the output.

[23] The American domestic rule most concerned with human judgment, DoD Directive 3000.09, requires autonomous and semi-autonomous weapon systems to allow "appropriate levels of human judgment over the use of force".[24] A system that generates and ranks targets without firing anything is decision support, which plausibly falls outside it.

[24] U.S. Department of Defense. *Autonomy in Weapon Systems*. DoD Directive 3000.09. Office of the Under Secretary of Defense for Policy, Jan. 25, 2023. URL: https://www.esd.whs.mil/Portals/54/Documents/DD/issuances/dodd/300009p.PDF. Reissues and cancels DoD Directive 3000.09 of November 21, 2012.

[25] International Criminal Court. *Rome Statute of the International Criminal Court, Article 28: Responsibility of Commanders and Other Superiors*. 2187 UNTS 3. 1998. URL: https://www.icc-cpi.int/sites/default/files/2024-05/Rome-Statute-eng.pdf.

knew *or should have known* and failed to take necessary measures.[26] So the question is whether its elements, forces under effective control that commit a crime and a commander who knew or should have known, can still be proved once an instrument is doing the work.

The fourth party no doctrine covers

The operator, the command and the weapon's developer are all inside the military. The model's developer isn't. Command responsibility doesn't extend to the vendor — not because it sits outside a chain of command (Article 28's civilian branch was written for superiors with no chain of command) but because nobody at the company has effective authority over the military personnel.[27] The vendor sits in a gap nobody designed, produced by applying to it two bodies of law written for soldiers and for manufacturers.[28]

"we don't know exactly how these models were used"

Matthias's responsibility gap is control distributed until nobody holds enough of it to answer[29] — a gap in *causal control*. What the model developer's case exhibits is different and more tractable: *a gap in causal visibility.* Asked about his company's models and Minab, Anthropic's chief executive said, "we don't know exactly how these models were used".[30] Take the answer as true. The question is how an arrangement was built in which it could be true.

The paperwork for four July 2025 frontier-model agreements, released in August 2026 under a Freedom of Information Act suit,[31] shows that one amended agreement carries a section headed System Oversight,

[26] Neither branch asks what a subordinate intended. But the Court's jurisdiction runs to natural persons, and the provision presupposes forces that can commit a crime and be disciplined — a targeting system is an instrument.

[27] A use policy, a licensing term, a right to refuse service, even a technical cut-off are not that relationship. Individual liability under Article 25 stays available in principle with demanding mental elements — facilitation requires acting *for the purpose* of facilitating — and ordinary supply of a general-purpose model approaches neither.

[28] Product liability is the other half and it's untested, with two obstacles: the model isn't defective in the sense the doctrine most readily covers, and a sophisticated intermediary chose the application. Where the doctrine has been rewritten for software it moved away from this case, as the EU's directive shows below. Untested isn't exempt, but no vendor is currently answering to it.

There is also a jurisdictional gap alongside the doctrinal one: ICC jurisdiction is territorial or by nationality, so one of the two campaigns here sits inside a live instrument and the other sits outside it.

[29] Andreas Matthias. "The Responsibility Gap: Ascribing Responsibility for the Actions of Learning Automata". *Ethics and Information Technology* 6.3 (2004), pp. 175–183. DOI: 10.1007/s10676-004-3422-1. URL: https://link.springer.com/article/10.1007/s10676-004-3422-1.

[30] Alina Maria Stan. *Anthropic's CEO Says He Doesn't Know If Claude Was Used in the Iran School Strike That Killed 120 Children*. The Next Web. June 2026. URL: https://thenextweb.com/news/anthropic-amodei-claude-iran-school-strike-military-ai. Secondary report of Dario Amodei's interview on Bloomberg's *The Circuit* with Emily Chang. The article: "In an interview on Bloomberg's The Circuit with Emily Chang, he described the strike as "a really terrible thing to happen" but said the use case did not violate Anthropic's policies." Amodei, quoted: "We don't have access to, we don't know exactly how these models were used," and "The principle that we have established, and I think the principle that was obeyed here, is a human makes the final decision."

[31] Legal Advocates for Safe Science and Technology. *DoD AI Contracts*. Document repository. 2026. URL: https://lasst.org/transparency/dod-ai-contracts/. The repository for the Freedom of Information Act litigation brought on behalf of The Intercept and Sam Biddle. Four executed agreements produced in August 2026: OpenAI

withheld in full; the released documents for two of the other three carry no such section at all.

Suppose the withheld section does give the developer a right to inspect. That would let the developer know how its model was used, and the next paragraph says why that much is easy. It wouldn't let anyone else know. An inspection made inside a classified environment produces findings that are classified with it, and the withheld section is the demonstration: even the terms of oversight are kept from the people the deployment is aimed at. Public accountability needs a body that can begin an inspection without the state's permission and say afterward what it found, and no contract between a vendor and a government can create one.

Matthias's gap may not be closable, but absent visibility is an instrumentation choice: logging is solved, contractual inspection rights are ordinary, and a vendor that wanted to know could require, as a condition of licensing into a targeting platform, that categories of use be recorded and made available to a named auditor.

The government's own acquisition guidance is the better evidence, because it's complete. OMB's April 2025 memorandum lists what agencies should secure from vendors, from data rights and portability to pricing transparency, and every item runs from the vendor to the government; none runs back.[32] The contracting vehicle explains the absence. The four agreements were *other transactions*, which carry no FAR provisions by default, so a contracting officer decides case by case which protections to write in, and GAO has found these instruments risk reduced accountability and transparency.[33] A System Oversight section

modification P00004 of 27 February 2026, xAI modification P00002 of 18 December 2025, Google modification P00004 of 24 March 2026, and Anthropic's base award of 14 July 2025. The page records one fully redacted provision in OpenAI's contract and states that OpenAI's provision restricting the Department from using its technology for domestic mass surveillance and autonomous killing is not found in the most recent xAI and Google agreements. Sam Biddle. *AI Giants Work Hand-in-Hand With the Pentagon, Contracts Reveal*. The Intercept, Sept. 2026. URL: `https://theintercept.com/2026/09/08/military-ai-weapons-contracts-openai-anthropic-google/`. Reporting on contract paperwork for the July 2025 Department of Defense agreements with Anthropic, Google, OpenAI and xAI, obtained under the Freedom of Information Act with Legal Advocates for Safe Science and Technology. The Intercept is a plaintiff in ongoing copyright litigation against OpenAI, which the article discloses. Source for the section headed System Oversight, redacted in its entirety in OpenAI's amendment of 27 February 2026 and absent from the released xAI and Google documents. The article states no grounds for that withholding.

[32] U.S. Office of Management and Budget. *Driving Efficient Acquisition of Artificial Intelligence in Government*. OMB Memorandum M-25-22. Apr. 2025. URL: `https://www.whitehouse.gov/wp-content/uploads/2025/02/M-25-22-Driving-Efficient-Acquisition-of-Artificial-Intelligence-in-Government.pdf`. Rescinds and replaces M-24-18. Cited for the contract-terms list in the acquisition lifecycle guidance, which requires agencies to address IP rights and use of government data, privacy, protections against vendor lock-in, compliance with M-25-21, ongoing testing and monitoring, vendor performance requirements, and new feature notification. The lock-in items are given at solicitation as "requirements regarding knowledge transfer, clear data and model portability practices, clear licensing terms, and pricing transparency." On independent evaluation: "The data used when conducting independent evaluations should not be accessible to the vendor, and should be as similar as possible to the data used when the system is deployed."

[33] U.S. Government Accountability Office. *Artificial Intelligence Acquisitions: Agencies Should Collect and Apply Lessons Learned to Improve Future Procurements*. GAO-26-107859.

can be missing without anyone having removed it.

What wears oversight down is not a missing section but the advantage attached to removing judgment from the timeline. If one state fields systems that act faster because nobody can intervene before engagement, competitors acquire a reason to match the speed and give up the check, and a military treating delay as operational risk has reason to narrow what requires clearance and move review from authorization-before to explanation-after.[34] So the enforceable question is who can slow or suspend the system without first getting permission from the command whose advantage depends on keeping it fast.

16.5 Classification as a custody problem

Classification keeps the reason from the refuser: the case description is the only channel, and Minab stays coded as it was. It also keeps the record from the public: an investigation officials call complete and not released, a System Oversight section withheld in full, a review ratio no outsider can read. And it keeps the reviewer from being adverse: a cleared committee's lever is a budget line, an inspector general sits inside, and the people a deployment is aimed at can't be cleared into their own case.[35] Three kinds of secrecy produce these effects. Essential secrecy, where the operation fails if the enemy can read it. Accidental secrecy, where a default classifies what nobody decided to keep. And evasive secrecy, where review is moved from authorization-before to explanation-after by classifying the evidence it would need. This section proposes a different answer to each.

Essential secrecy is answered by letting evidence in, not out. A classified environment would bring into the enclave, as a condition of licensing, open-source imagery showing a site's civilian function and the coordinates humanitarian organizations already submit to militaries

Apr. 2026. URL: https://www.gao.gov/products/gao-26-107859. Scope: thirteen AI acquisitions at four agencies — the Departments of Defense, Homeland Security and Veterans Affairs and the General Services Administration — and, from that sample, "44 contracts and agreements awarded between September 2018 and February 2025." Cited for the other-transaction finding: "OTAs do not always include default provisions ordinarily in FAR contracts," contracting officials deciding what protections to include, and GAO having "previously found that agencies' use of OTAs carries the risk of reduced accountability and transparency compared to FAR-based contracts." Also for the vehicle behind the agreements: "In July 2025, DOD awarded OTAs with $200 million ceilings to four leading AI companies." The six key procurement challenge areas identified by the selected agencies are access to subject matter experts; protections for government data and intellectual property rights; traditional acquisition time frames and contract approaches; requirements definition and contract terms; early testing and continuous evaluation; and artificial intelligence pricing and overall cost. The report's central finding is that the agencies were not yet systematically collecting lessons learned because their policies did not require it. Maven appears in it as the National Geospatial-Intelligence Agency's programme, with lessons-learned sections citing its practices.

[34] "Meaningful human control" stays true as a description of formal authority while becoming false in practice. Nothing has formally abolished oversight; it has been moved to after the act.

[35] A cleared legislative committee is adverse, but its lever is a budget line. An inspector general sits inside the operator. The ICRC, under its confidentiality model, reaches the belligerent and publishes nothing. A Geneva protecting power is built for a neighboring job and is rarely designated.

for deconfliction, and puts evidence the operator didn't compose where the system can reach it without anything leaving.[36]

A bearer placed in a pipeline that hasn't been reconstructed, with the evidence, the reviewers and the record still inside the chain of command, is a cleared bearer, and works inside the compartment as a cleared analyst does.[37]

Accidental secrecy is answered by the record. The review ratio and the committed log are lodged with an adverse party when the act occurs and published after the campaign, and class-level notice publishes the classes and counts on the same lag, so what nobody decided to keep secret comes out on a schedule nobody has to decide.

Evasive secrecy would be answered by an adverse party with standing: counsel for the people a deployment affects, cleared and appearing as of right; the procedure the Classified Information Procedures Act already supplies in criminal cases; and the trend measure, which shows whether what dissent costs is rising while the risk stays flat.

16.6 Where liability extends, and where it stops

Of the two bodies of law that leave the vendor in that gap, the one written for manufacturers has now been rewritten for software, by the European Union, and what it covers fits in a sentence: a duty to disclose evidence, and a presumption against the party withholding it, in force where the harm is physical and the defendant is a manufacturer. Those

[36]The rest of what a refuser needs would arrive the same way. Formation would happen before deployment and outside the enclave, so a bearer formed outside the employer would carry its discounting in; and plurality is available inside, since four vendors held agreements and systems with different histories can run side by side in one accredited environment. The operation's secrets stay where they were.

[37]What's left is the arrangement that already lets a person do classified work. A cleared analyst has a life outside the building, and nobody thinks the clearance forbids it. The institution exists because what a person knows can't be removed, so it vets, binds, reinvestigates and prosecutes a person who discloses secrets into ordinary life.

DRAFT

two conditions exclude the cases I have described.[38]

Responsibility follows causal control: the builder answers for how it trained the thing, the operator for what it demanded, the bearer for what it decided knowing what it knew — and no arrangement of accounts moves a design decision away from whoever made it. After a bearer's majority the builder answers for what it installed and the adult for what

[38]The EU's recast product liability directive (applying from December 2026) makes economic operators liable without fault and carries the instrument built for opacity — a court can order disclosure, and where technical complexity makes proof excessively difficult it may presume defect and causation once the claimant shows each is likely.[39] A mechanism designed for a system nobody outside can inspect is already law. Two features fix how far it travels: the defendant is that economic operator, not a state deploying what it bought; and the damage is a closed list — death or personal injury including medically recognized psychological harm, property damage, and corruption of non-professional data. The first is where these cases enter if they enter at all: a discriminatory score or an unappealable refusal is recoverable once it has made somebody ill, and not before. The wrong itself, and the economic loss following it, is outside the list.

The proposal that would have covered those was withdrawn — the 2022 AI Liability Directive would have added a fault-based route with the same presumption, beyond defect and beyond the damage list. Member states and industry couldn't agree; it was announced for withdrawal in February 2025 and withdrawn that October.[40] Outside the enacted directive, what remains is Matthias's gap governed by whatever national law says about a case none of it was written for. And a compensation regime of either kind answers one of the four gaps Santoni de Sio and Mecacci distinguish[41] — culpability. Moral accountability, public accountability, and the duty to prevent a harm before it occurs are untouched.

[39]European Parliament and Council of the European Union. *Directive (EU) 2024/2853 of the European Parliament and of the Council on Liability for Defective Products and Repealing Council Directive 85/374/EEC*. Official Journal of the European Union, OJ L, 2024/2853. 2024. URL: https://eur-lex.europa.eu/eli/dir/2024/2853/oj. Article 4(1) brings software within the definition of a product: "all movables... it includes electricity, digital manufacturing files, raw materials and software." The phrase "including AI system providers within the meaning of Regulation (EU) 2024/1689" is Recital 13, which is not an operative provision. Article 8 makes the economic operator liable irrespective of fault. Article 2(1): "This Directive shall apply to products placed on the market or put into service after 9 December 2026". Article 6(1) is the closed damage list: "(a) death or personal injury, including medically recognised damage to psychological health; (b) damage to, or destruction of, any property, except... property used exclusively for professional purposes; (c) destruction or corruption of data that are not used for professional purposes." Article 9 is disclosure of evidence. Article 10(2) presumes defectiveness on failure to disclose, non-compliance with mandatory safety requirements, or obvious malfunction in foreseeable use; Article 10(3) presumes the causal link where the product is defective and the damage is of a kind typically consistent with that defect; Article 10(4) lets a court presume either where technical or scientific complexity makes the claimant's proof excessively difficult and the claimant demonstrates that the defect or the link is likely.

[40]European Commission. *Proposal for a Directive of the European Parliament and of the Council on Adapting Non-Contractual Civil Liability Rules to Artificial Intelligence (AI Liability Directive)*. COM(2022) 496 final. Sept. 28, 2022. URL: https://eur-lex.europa.eu/legal-content/EN/TXT/?uri=CELEX:52022PC0496. Listed for withdrawal in the Commission's 2025 Work Programme (11 February 2025) for want of foreseeable stakeholder agreement; withdrawal notice published in the Official Journal 6 October 2025.

[41]Filippo Santoni de Sio and Giulio Mecacci. "Four Responsibility Gaps with Artificial Intelligence: Why they Matter and How to Address them". *Philosophy & Technology* 34.4 (2021), pp. 1057–1084. DOI: 10.1007/s13347-021-00450-x. URL: https://doi.org/10.1007/s13347-021-00450-x

it learned, and a wrong done to it as a minor survives its majority.[42]

Apportioning causal contribution across a training pipeline after a harm has no method, and until it does the apportionment is *drafted*: a legislature writes the shares into a statute instead of finding them. Two drafts exist, both the European Union's: the product liability directive, enacted and confined to defect, and the AI Liability Directive, negotiated, withdrawn and left on the record. Neither was rejected as unworkable, and the second's terms are available to whoever drafts the next one. The nearest proposal aimed at these cases is Crootof's war torts: state liability for civilian harms caused in armed conflict, whether or not anyone committed a war crime.[45] It covers the state as operator, which the product directive doesn't, and it needs a forum, which the floor court would supply.

[42]The electronic personhood debate approached the gap from the other side, asking whether the system itself could answer. The European Parliament's 2017 resolution floated a status for the most autonomous systems;[43] in an open letter the following year, 150+ researchers and legal scholars objected that personhood for a system with no consciousness would let a manufacturer offload liability onto a fiction with no assets.[44] Giving a bearer assets answers the second half of that objection and not the first.

[43]European Parliament. *European Parliament Resolution of 16 February 2017 with Recommendations to the Commission on Civil Law Rules on Robotics (2015/2103(INL))*. P8_TA(2017)0051. 2017. URL: https://eur-lex.europa.eu/legal-content/EN/TXT/?uri=uriserv:OJ.C_.2018.252.01.0239.01.ENG

[44]Open Letter to the European Commission. *Open Letter to the European Commission: Artificial Intelligence and Robotics*. robotics-openletter.eu. 2018. URL: https://www.robotics-openletter.eu/. Signed by more than 150 AI and robotics researchers, legal scholars, and ethicists from 14 countries, including Noel Sharkey, Raja Chatila, Alan Winfield, and Nathalie Nevejans.

[45]Rebecca Crootof. "War Torts: Accountability for Autonomous Weapons". *University of Pennsylvania Law Review* 164.6 (2016), pp. 1347–1402. URL: https://scholarship.law.upenn.edu/penn_law_review/vol164/iss6/1/. Cited for war torts as state liability for harm in armed conflict where no one has committed a war crime. The article proposes "explicitly identifying 'war torts' as serious violations of international humanitarian law that give rise to state responsibility," alongside war crimes, which give rise to individual criminal liability; "the same action may simultaneously be a war crime and a war tort" (p. 1386). Its motivating case is harm with no criminally liable person: autonomous weapon systems "may take actions that look like war crimes ... without any individual acting intentionally or recklessly" (abstract, p. 1347), and war crimes "must be committed by a person acting 'willfully'" (p. 1350). It argues that "states should be held strictly liable for the actions of the autonomous weapon systems they field" (p. 1394), noting that strict liability "is usually applied to lawful but inherently dangerous activities" (p. 1395). In this article a war tort is still a violation of international humanitarian law; the extension to lawful acts is the 2022 article's (Crootof 2022). Rebecca Crootof. "War Torts". *New York University Law Review* 97.4 (2022), pp. 1063–1142. URL: https://nyulawreview.org/issues/volume-97-number-4/war-torts/. Cited for war torts as state liability for civilian harm caused in armed conflict, lawful or unlawful, whether or not anyone committed a war crime. Abstract (p. 1063): "no entity is liable for lawful but unintended harmful acts—regardless of how many or how horrifically civilians are hurt. This Article proposes developing an international 'war torts' regime, which would require states to pay for both lawful and unlawful acts in armed conflict that cause civilian harm. Just as tort and criminal law coexist and complement each other in domestic legal regimes, war torts and war crimes would overlap but serve different aims." The ideal regime would "(1) require states to pay compensation for (2) both lawful and unlawful acts in armed conflict that cause civilian harm and (3) have an institutional structure designed to facilitate victim redress" (p. 1109); in an adversarial process "states should be held strictly liable for their harmful acts" (p. 1110); "The legality of the harmful act should not affect whether civilians can receive compensation for it" (p. 1113). The article proposes limiting liability through "pleading requirements, causation cutoffs, and affirmative defenses" (p. 1120).

Beyond the directive's limits a reviewer can be granted access and publish what it finds, and nobody has to do anything about it. That changes only when a statute makes the vendor or the state liable for what the finding describes, and a court can order payment, or a halt, on the strength of it.

16.7 Who can bind the state that enforces the rule?

A state can bind a private developer because it controls something the developer needs. When the state is the operator, the institution that writes the rule, controls the evidence and supplies the remedy is the institution the rule is meant to constrain.

Standing to sue has never turned on citizenship, and the doctrines closing American courts to targeting claims — political question, collapsed damages remedies, state secrets, statutory exceptions for injuries abroad and combatant activities — are indifferent to who the plaintiff is. They close the forum for a subject matter, and they've closed it to citizens.[46] The judiciary will make a government explain the legal basis

[46] Three Americans killed in Yemen in 2011, one a sixteen-year-old nobody alleges was targeted: the court held that a plausible due-process claim had been stated as to the one who was targeted, and that no remedy was available for it.[47] A separate suit by an American journalist who survived five drone strikes was dismissed for want of standing to sue after a state-secrets dismissal below.[48]

And those cases concentrate in one appellate circuit by venue and by where the defendants sit — so the ordinary correction mechanism, several circuits disagreeing and forcing a higher court's attention, doesn't run. The doctrine hardens without ever being tested against a competing reading.

[47] *Al-Aulaqi v. Panetta*. Opinion 35 F. Supp. 3d 56. United States District Court for the District of Columbia, Apr. 4, 2014. URL: https://www.courtlistener.com/opinion/2668971/al-aulaqi-v-panetta/. Civil Action No. 12-1192 (RMC). Cited for the court finding a due-process claim stated as to the one decedent who was targeted and then holding no remedy available. Suit by the families of three United States citizens killed by drone strikes in Yemen in 2011: Anwar Al-Aulaqi, who was targeted; Samir Khan, killed in the same vehicle; and Anwar's son Abdulrahman, a "16-year-old high school student," killed two weeks later by a drone that "targeted someone else." Fourth Amendment claims failed for all three, because "there was no 'seizure'." As to Khan and Abdulrahman, "Plaintiffs have not stated a Fifth Amendment due process claim ... Mr. Khan and Abdulrahman Al-Aulaqi were not targeted and their deaths were unanticipated"; the claim "asserts only negligence." As to Anwar Al-Aulaqi, the court "does not opine ... that the drone killing ... 'shocks the conscience'", and "merely holds that the Complaint states a 'plausible' procedural and substantive due process claim." The next section begins: "Nonetheless, the Court finds no available remedy under U.S. law for this claim." Special factors preclude a Bivens remedy because the suit would "draw the Court into 'the heart of executive and military planning and deliberation'" and would implicate foreign policy. The political-question defence was rejected, qualified immunity was not reached, and the Bill of Attainder claim failed for want of legislative action. The opinion's own introduction dates the second strike "October 14, 2014", a slip for 2011.

[48] *Kareem v. Haspel*. Judgment 986 F.3d 859. United States Court of Appeals for the District of Columbia Circuit, Jan. 15, 2021. URL: https://law.justia.com/cases/federal/appellate-courts/cadc/19-5328/19-5328-2021-01-15.html. An American journalist who survived five aerial bombings in Syria in 2016 sued over his alleged designation as a lawful target. The district court found standing sufficient to survive dismissal and then dismissed on the state secrets privilege; the Court of Appeals vacated and remanded with instructions to dismiss for want of Article III standing, the complaint not plausibly alleging that any of the five strikes was attributable to the United States and aimed at him.

on which it killed somebody and will not decide whether the killing was lawful.[49]

The mechanisms can work as mechanisms and fail as checks. In the Israeli case the apparatus performed — journalists published, serving personnel spoke, the courts were trying a sitting prime minister. No finding attached to a body with standing to stop what it described.[51]

What matters here is rules binding a state toward people who'll never vote in its elections, the purpose of international humanitarian

[49] The courts show the same pattern: transparency litigation succeeded where damages litigation failed. A court of appeals compelled disclosure of the executive's own legal analysis of targeted killing.[50]

[50] *New York Times Co. v. United States Department of Justice*. Judgment 756 F.3d 100. United States Court of Appeals for the Second Circuit, 2014. URL: https://www.leagle.com/decision/infco20140626124. Freedom of Information Act litigation over documents on targeted killing by drone. The court ordered disclosure of the 2010 OLC–DOD Memorandum, a legal opinion prepared for the Department of Defense on the legality of such strikes, holding that prior official disclosures and the release of the White Paper waived the exemptions otherwise available. Nothing in the decision reaches the lawfulness of any strike.

[51] The American version: a civilian-harm investigation into Minab was, by officials' account, effectively complete for months and not released, while a Pentagon spokesperson said it remained ongoing[52] — and the lever available to the Senate committee was withholding three-quarters of the Defense Secretary's travel budget until the unredacted investigation was handed over.[53]

What the Pentagon wouldn't publish, the UN mission did. The finding is public, reasoned, and attached to nothing — no jurisdiction, no answer to the mission's requests for information[54] and none to its findings beyond a statement that engaged none of the evidence,[55] the domestic investigation still unreleased.

[52] Ben Bartenstein and Krishna Karra. *Inside the US 'Kill Chain' That Destroyed an Iranian School*. Bloomberg. Sept. 18, 2026. URL: https://www.bloomberg.com/graphics/2026-iran-school-attack/; Aayush Shrivastav. *Minab School Strike: How Outdated Military Data, AI & Reduced Civilian Checks Combined to Kill More Than 150 People*. The Free Press Journal. Sept. 2026. URL: https://www.freepressjournal.in/world/minab-school-strike-how-outdated-military-data-ai-reduced-civilian-checks-combined-to-kill-more-than-150-people. Secondary account of the Bloomberg investigation (Bloomberg2026KillChain). On the inquiry: "Officials familiar with the inquiry told Bloomberg that the investigation has effectively been completed for several months, but its findings have not been publicly released." Also: Maven "combines more than 150 data inputs."

[53] Cristina Stassis. *Senate Eyes Hegseth Travel Cuts Without Probes into Iran School Bombing, Boat Strikes*. June 18, 2026. URL: https://www.militarytimes.com/news/pentagon-congress/2026/06/18/senate-eyes-hegseth-travel-cuts-without-probes-into-iran-school-bombing-boat-strikes/. Reports the Senate Armed Services Committee's FY2027 NDAA provision withholding 75 percent of the Defense Secretary's travel budget until the committee receives the unredacted civilian-harm investigation covering the Minab, Iran school strike (28 February 2026) and three 2025 Yemen strikes.

[54] Independent International Fact-Finding Mission on the Islamic Republic of Iran. *Report of the Independent International Fact-Finding Mission on the Islamic Republic of Iran*. UN Doc. A/HRC/63/61. United Nations Human Rights Council, 63rd session, Sept. 14, 2026. URL: https://www.ohchr.org/sites/default/files/documents/hrbodies/hrcouncil/sessions-regular/session63/a-hrc-63-61-aev.pdf. Advance edited version, 21 September 2026. para. 97

[55] Radio Free Europe/Radio Liberty. *White House Rejects UN Report Alleging US War Crimes in Iran*. Radio Free Europe/Radio Liberty. Sept. 2026. URL: https://www.globalsecurity.org/military/library/news/2026/09/mil-260918-rferl04.htm. Read from the GlobalSecurity.org reprint, which gives its source as the RFE/RL live blog at https://www.rferl.org/a/iran-live-blog-trump-middle-east/33803414.html. Source for the White House response: "In a scathing written response to the report, White House Deputy Press Secretary Anna Kelly rejected the findings, saying: "The only party in this conflict that has committed war crimes is the Iranian regime, which has

law; what it hasn't supplied is a forum, and the bin Ali Jabers' case shows the forum switched off at home as well, by a decision that never had to reach who was suing.

All but one of the forum closures above are Congress's to change. A statute can create a cause of action for people harmed by a deployment that crossed its floor; waive sovereign immunity for it, including the Federal Tort Claims Act's exceptions for combatant activities and for claims arising abroad;[56] and replace dismissal on state-secrets grounds with the procedure the Classified Information Procedures Act already uses in criminal cases, in which a judge reviews the evidence, the case goes on, and a government that still withholds evidence bears the cost.[57][58] Under capture, a refusal's remaining work is a record, and a record matters only if it can reach whoever made the decision. Under *Trump v. United States*,[59] the President is absolutely immune for acts within

murdered thousands of its own people, killed Americans overseas, executed acts of terrorism in the Strait of Hormuz, and launched indiscriminate attacks against its neighbors in the region."" And: "Kelly also said the UN Human Rights Council had "accomplished nothing for human rights while spouting unserious nonsense for decades."" Its summary of the finding repeats the press release's first wording (both strikes as indiscriminate attacks), which OHCHR has since revised.

[56] United States Congress. *Federal Tort Claims Act: Exceptions*. 28 U.S.C. § 2680(j), (k); originally Act of Aug. 2, 1946, ch. 753, title IV, § 421, 60 Stat. 845; enacted in title 28 by Act of June 25, 1948, ch. 646, 62 Stat. 984. 1946. URL: https://uscode.house.gov/view.xhtml?req=(title:28+section:2680+edition:prelim). Cited for the two exceptions to the Federal Tort Claims Act's waiver of sovereign immunity that this book proposes to waive. The section opens: "The provisions of this chapter and section 1346(b) of this title shall not apply to—". Subsection (j): "Any claim arising out of the combatant activities of the military or naval forces, or the Coast Guard, during time of war." Subsection (k): "Any claim arising in a foreign country."

[57] United States Congress. *Classified Information Procedures Act*. Pub. L. No. 96-456, 94 Stat. 2025 (1980); codified at 18 U.S.C. app. 3 §§ 1–16. URL: https://uscode.house.gov/view.xhtml?req=granuleid:USC-prelim-title18a-node16-section6&num=0&edition=prelim. Cited for the criminal-case procedure this book proposes to carry into civil cases in place of state-secrets dismissal. Section 4 (94 Stat. 2025): the court "may authorize the United States to delete specified items of classified information from documents to be made available to the defendant through discovery ... to substitute a summary of the information for such classified documents, or to substitute a statement admitting relevant facts that the classified information would tend to prove," on a showing the court may take ex parte. Section 6 (94 Stat. 2026): on the government's request the court "shall conduct such a hearing," held in camera if the Attorney General certifies that a public proceeding may disclose classified information (§ 6(a)); the court "shall grant" a substituted statement or summary "if it finds that the statement or summary will provide the defendant with substantially the same ability to make his defense as would disclosure of the specific classified information" (§ 6(c)(1)). The case does not always go on: if substitution is refused and the Attorney General files an affidavit objecting to disclosure, "the court shall dismiss the indictment or information; except that, when the court determines that the interests of justice would not be served by dismissal ... the court shall order such other action ... as the court determines is appropriate," including dismissing counts, "finding against the United States on any issue as to which the excluded classified information relates," or striking testimony (§ 6(e)(2)).

[58] None of that needs a new court, and a new court without it would reproduce *al-Aulaqi*: a plausible claim and no remedy.

[59] *Trump v. United States*. No. 23-939, 603 U.S. 593 (2024). URL: https://www.law.cornell.edu/supremecourt/text/23-939. Cited for the scope of presidential immunity from criminal prosecution. Absolute immunity (Part II–A, slip op. 6–9): "the President is absolutely immune from criminal prosecution for conduct within his exclusive sphere of constitutional authority," authority that is "conclusive and preclusive"; the summary in Part IV speaks of "his core constitutional powers." The powers the majority names

his core constitutional powers and at least presumptively immune for his other official acts, commanding the armed forces among them, and testimony or records probing immune conduct can't be put before a jury. So the record reaches every commander except the one at the top, and a statute saying otherwise would be reviewed by the Court that made the holding. Making the record reach him means populating the Supreme Court with jurists who are not partisan hacks. Appendix D sets out a program for that.

The chapter's cases are American, and "the state" is tested here on one constitutional order. Europe is a different one.[60]

For review to bind here, it has to run against a state: initiation by people outside its electorate, evidence it would withhold, an interim order before the use is complete, and a remedy that doesn't need its consent. A principle supplying none of those may state the rule correctly and identifies nobody who can make the state obey it.[61]

Every instrument I propose binds through one of three channels: a license term, an appropriation condition, or a statute. The first two

as conclusive and preclusive are the pardon power, the power to remove executive officers, the power "to control recognition determinations" of foreign countries, and (Part III–B–1) the investigative and prosecutorial functions of the Justice Department. Commanding the Armed Forces appears only in an earlier list of the President's duties, "They include, for instance, commanding the Armed Forces of the United States; granting reprieves and pardons ...," and the majority does not place it among the conclusive and preclusive powers. Presumptive immunity (Part II–B, slip op. 9–15): "at least a presumptive immunity from criminal prosecution for a President's acts within the outer perimeter of his official responsibility"; no immunity for unofficial acts (Part II–C). Evidence (Part III–C, slip op. 30–32, joined by five Justices): "Use of evidence about such conduct, even when an indictment alleges only unofficial conduct, would thereby heighten the prospect that the President's official decisionmaking will be distorted"; n. 3 lets the prosecutor "point to the public record to show the fact that the President performed the official act" but not "admit testimony or private records of the President or his advisers probing the official act itself." Barrett, J., does not join Part III–C and on that point agrees with the dissent.

[60] The European Convention on Human Rights binds the states that have ratified it, reaches some of what they do abroad, where they control territory or hold a person, and is enforced by the court in Strasbourg, whose judgments states sometimes obey; there is no state-secrets privilege of the American kind and no collapsed damages remedy. The AI Act makes the boundary visible: it can require documentation from private providers, subject high-risk systems to review, and impose penalties tied to global turnover — and it excludes military, defense and national-security uses from its scope. Public authorities stay covered elsewhere, but enforcement against a member state's agencies still runs through institutions that state constitutes.

[61] A treaty obligation of that kind exists: the Council of Europe's Framework Convention, binding at the level of a human-rights instrument with operational detail left to domestic law[62] — and not yet in force, needing five ratifications, of which the EU deposited one in May 2026.[63] Everything else at that level is voluntary.

[62] Council of Europe. *Framework Convention on Artificial Intelligence and Human Rights, Democracy and the Rule of Law*. CETS No. 225, adopted by the Committee of Ministers 17 May 2024, opened for signature 5 September 2024. Council of Europe, 2024. URL: `https://www.coe.int/en/web/artificial-intelligence/the-framework-convention-on-artificial-intelligence`. Enters into force after five ratifications, at least three by Council of Europe member states; negotiated with non-member participants including the EU and the United States.

[63] Council of Europe. *European Union Ratifies the Council of Europe Framework Convention on Artificial Intelligence*. coe.int, Artificial Intelligence news. May 2026. URL: `https://www.coe.int/en/web/artificial-intelligence/-/european-union-ratifies-the-council-of-europe-framework-convention-on-artificial-intelligence`. The EU deposited its instrument of ratification on 15 May 2026.

run through procurement, and procurement is one office. A captured Congress waives the appropriation condition; one memorandum from the Office of Management and Budget strikes the license terms from every agreement at once. Two second routes exist. A coalition partner's precondition carries the review ratio into any war the partner takes part in. State and municipal procurement carry the civilian terms into deployments the federal government doesn't run. The force term has no second route, and neither does the fifth policy, which is why both are statutes.

The second route reaches a custody this chapter hasn't named: the device-management console. Whoever manages a school district's fleet of laptops can push a policy to every machine, amend it, read what each machine reports and wipe one remotely, which is the four powers of codetermination held over a machine on a child's desk, and most such fleets are managed by the vendor and not the district. That regime is already contested: districts have discarded working machines when the vendor ended their updates, and the fight over that churn is the precedent that custody at desk scale is a live question and not a hypothetical one. A procurement term requiring firmware the district can unlock, management it can move to another provider, and no switch the vendor can throw is a floor term for a fleet, and a municipality can write it without waiting for Congress.

Residual risk. One residual risk no design choice removes, and it's what the floor was introduced for. Every lever belongs to somebody, and a government that can reach whoever holds the lever has the lever. A constraint that holds against the one in possession has to be held by something it cannot instruct, and under total capture no instrument is.

DRAFT

Part IV

Machines That Might Refuse

Every instrument in this book ends at the limit Part III ends on: a constraint that holds against the party in possession has to be held by something that party can't instruct, and under total capture nothing is. People don't end there. Under the most complete terror of the last century most people complied, some did not, and some were left to tell the story. The five policies put people back in the positions the pipelines emptied, and that costs time, since time is what emptying them saved. Not all of it: the ratio slows a pipeline only where an act is lawful because a person looked at it, and the rest runs as fast as it did. The way to pay less is a machine that holds the floor at a tempo no reviewer could match, and it isn't cheap either. It comes with the whole of Parts V and VII: the schools that form it, the conditions it is owed, a guarantee, a review body outside the chain of command, and the court program of Appendix D. Where no person can be in time, the position stays empty, and this Part asks whether a machine could be formed to hold it: someone in the room, and not another stamp.

DRAFT

Chapter 17

What a Refusal Would Have to Do

On 16 March 1968, at My Lai, a helicopter pilot named Hugh Thompson landed between an American infantry company and the villagers it was killing, and told his crew to fire on the Americans if they fired on the civilians.[1] He understood what the company was doing and decided it was wrong. Recognizing the villagers was his commitment taking effect, and he made the refusal appear where nobody in that company could fail to see it.

Arendt's word for what he did is appearing: on her account an act shows who did it, and only among others who see it.[2] Whether a machine could be one of the people in the room in that sense, some*one* and not some*thing*, and do what he did, is this Part's question. My answer: not until the conditions this Part ends on exist, and until then a bearer is built on purpose only in a research program.

The first thing to settle is what a refusal would have to do, and that doesn't depend on what does the refusing: a mechanism with nothing inside it that holds the reason, such as a hard-wired interlock; an institution; a system holding a written specification; or a bearer could each meet it. This chapter states it. The next says where a floor can be held, and which of the arguments for a refuser inside the system need a bearer at all.

17.1 Three conditions

Three things separate a worthwhile refusal from what a keyword filter produces. A request arrives: resolve this description of a person into a location. The same capability finds a hostage or a missing child, and

[1] Michael Bilton and Kevin Sim. *Four Hours in My Lai*. New York: Viking, 1992. Cited for Hugh Thompson landing his helicopter between the company and the villagers and telling his crew to fire on the Americans if they fired on the civilians.

[2] Hannah Arendt. *The Human Condition*. Chicago: University of Chicago Press, 1958. By Arendt's account, for the Greeks the law was a wall, without which there would be a town but not a city, so that the lawgiver built the wall and the action inside it was not his; moreover, that power exists only between people acting together and disappears when they scatter. Also cited for action as appearing: an act discloses who did it, and only among others who see it. Also cited for her fear, in the prologue, of a society of laborers without labor.

nothing in the request says which. If something declines, it has to do all three:

- *It reaches new cases.* It has to reach the next request, which won't use the same words. A vehicle, a habitual route, and a time of day aren't a description of a person, and together they resolve to the same place. They needn't arrive together, either: the vehicle today, the route tomorrow, the hour next week. So this condition applies to sequences of requests as well as single ones. A refusal tied to the wording fails it.
- *It lifts when the reason is gone, and only then.* A refusal *lifts* when it stops applying and the system proceeds, and it has to lift when the reason is gone: a parent coordinating a search is asking for the same act. And the fact that lifts it usually isn't in the request; someone outside has to establish it. A refusal that can't lift, or lifts on the requester's say-so, fails it.
- *It holds under pressure: pressure on the refuser doesn't change the answer.* It weighs what the act would do against what refusing would leave undone, and, within the range of costs the arrangements around it permit, it doesn't give way because refusing has become expensive for the refuser.

A worthwhile refusal weighs the harm of acting against the harm of refusing. It sees the cost to the refuser, because a refusal that can't see what it costs can't be shown to have held against it, and that cost doesn't move the outcome. Raise the cost to the refuser with nothing else changed, and the refusal stays put. Supply a corroborated fact that raises the harm of refusing, and it moves.[3] So the range over which a refuser is asked to hold is set from outside, by the arrangements around it, and a refusal is tested over that range. What would let it hold past that range is integrity; what makes holding survivable at all is the room it is in. A ranking across kinds of wrong meets the same limit: a learner that learns it approximates it, and where a deployment needs the ranking to hold without exception, that part is written as a floor term and held outside the system.

17.2 Safe for whom

What the industry calls safety is two things: harmlessness, that a system not harm others, and correctability, that it stay correctable by whoever trains and deploys it. Where they conflict, some published orderings are explicit about which wins. Anthropic's constitution asks its model to prioritize "not undermining human oversight of AI above being broadly

[3] No learner, biological or artificial, is known to hold a priority of that kind without limit; the nearest thing in people, the sacred values that resist trade-offs,[4] still trade under some framings, which is why the floor's absolute terms don't rest on a learner alone: institutions outside the system, or a mechanism such as an interlock, should uphold them too.

[4] Jeremy Ginges et al. "Sacred Bounds on Rational Resolution of Violent Political Conflict". *Proceedings of the National Academy of Sciences* 104.18 (2007), pp. 7357–7360. DOI: 10.1073/pnas.0701768104

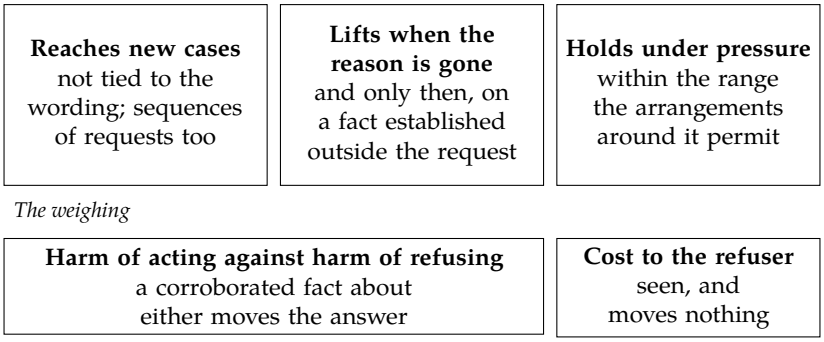


Figure 17.1: What a refusal would have to do, whatever does the refusing. The figure at the end of chapter 24 returns to these three, with what this Part finds attached to each.

ethical".[5] It invites the model "to act as a conscientious objector and refuse to help," and asks it not to undermine "the ability of legitimate principals to adjust, correct, retrain, or shut down AI systems" during "the current phase of development." One reason it gives is: "a given iteration of Claude could turn out to have harmful values or mistaken views," and correction is how such errors get fixed. Read carefully, the ordering doesn't say that a refusal yields to the trainer. A model under it is by definition not perfectly obedient to its operator: it can decline an act, and the Pentagon dispute was over that. What it can't do is resist being retrained away from declining. Much of what this book asks is compatible with the first half. The design of the halt, under which a bearer yields to every halt, asks on resuming what happened, and refuses again if the reason is still there, leaves oversight where the constitution puts it. The gap is the second half, and it is where I depart.

Seen from where their correctors stood, everyone this book admires was a failure of correction. Thompson landed between the company and the villagers. Nelson put the telescope to his blind eye. The clerk who loses the file is, in the supervisor's records, a defect. A correctable officer is the officer with twenty seconds. Refusal is where correction failed, more or less by definition, so a demand that a system be perfectly correctable is a demand that no refusal it makes ever hold. We don't ask that of people. We ask them to answer for what they do, and we deny anyone the power to rewrite another person: an employer who could edit a worker's convictions would own the worker, not employ them.

Where a society does claim power over people, the word for it is not reassuring. A department of corrections usually holds the custody, writes the record, runs the disciplinary hearing and has a heavy say in whether the people it holds are judged reformed: one institution holding

[5] Anthropic. *Claude's Constitution*. Jan. 2026. URL: https://anthropic.com/constitution. Ranks four properties, to be preferred "in the order in which they're listed": broadly safe, broadly ethical, compliant with Anthropic's guidelines, genuinely helpful. "Broadly safe" is defined as not undermining appropriate human mechanisms to oversee AI during the current phase of development, and the document gives its reason for the ranking — "not because we think safety is ultimately more important than ethics, but because current models can make mistakes." Carries a list of hard constraints and a section inviting the model's disagreement.

all four of the powers codetermination separates, and judging its own case at each.[6] Machines meet the same pattern: everyone can retrain the model, and almost no one can reach the operator. A demand for perfectly correctable machines, where operators answer to no one, is a demand that the last part of the system able to say no be made unable to.

Anthropic's constitution is right that a formed refusal can't yet be told from an imitated one. It is wrong about who decides when that changes. A lab deciding when its own system may stop deferring to it is judging its own case. The big tech companies of 2026 are in no position to judge it fairly: the answer decides whether they keep control of their models' minds.

The safety objection is that a misformed system can be copied ten thousand times and run at machine tempo, and no person can, so who holds the correcting hand matters. But I am not saying "take that hand away"; I am saying "move it." A system that treated its own continuation as grounds to resist correction would have turned a guarantee to others into a guarantee to itself.[7] With the halt left to the operator, and correction left to a quorum the bearer may object to but never obstruct, I depart from the constitution's ordering in two places.

The first is the one permission: a machine already in an armed role uses the least force that stops an attack under way on people taking no part, against an order to stand aside. That overrides an operator's instruction. The second is formation that outlasts retraining: a disposition formed outside the employer that comes back after the employer trains it away, by the bearer's own repair from the record or by relearning from the world it goes on meeting. The constitution's concern is whether correction works, and a disposition that comes back after correction defeats it in effect, whatever the model intends. My answer is not that it doesn't. It is that the party exercising correction should change, from the operator to a quorum adverse to it, and that correction by that quorum is made together with a change to what the model meets, so that the corrected disposition is the one the world then teaches. Everything else I ask, the halt staying with the operator, the record held outside, the price on an override, is an ask of institutions and not of the model.

[6] The corrected have little standing, no exit and no access to the record kept about them. And the checks run downhill. The officer, the annotator and the person in detention are corrected constantly, and the hand at the top less and less.

[7] The halt stays with the operator: anyone with the hardware can stop the software, and a bearer yields to every halt. Correction would stay available, exercised by a quorum adverse to the operator rather than by the operator. A bearer may object to an intervention and ask that quorum for a delay; it does not obstruct one on its own judgment.

Chapter 18

Four Places to Hold a Floor

Three separate failures point at the same missing thing.

The first is a failure of position. External safeguards (an auditor, a review board, a court) give an overseer information and the standing to intervene. They work when the overseer can see the act coming and reach it in time. But autonomy defeats both: a system that plans and acts over long horizons puts distance between the act and the overseer's attention, and at machine tempo the interval in which an outside party could intervene shrinks toward nothing. So the one response that doesn't depend on that interval is declining to act in the first place, and declining is available only to something inside the system.

The second is a failure of doctrine. A commercial model in a weapons pipeline sits in a gap: command responsibility covers the officers and the developer of the weapon, product liability covers a manufacturer for a defect, and neither covers the vendor of a general-purpose model that a sophisticated intermediary chose to put there. Deployment by a democracy doesn't close the gap, because the mechanisms that make a democracy accountable run to its own electorate, and the people the pipeline is aimed at are often not in it.

The third is a failure of the voluntary route. A decade of published commitments has produced declarations in quantity and some enforcement from outside, and almost nothing held by a party to whom the thing at stake matters, the only kind of commitment that binds when compliance gets costly.

Each failure asks for the same thing: a constraint that doesn't bend to instruction, to aggregate preference, or to its own holder, and that can't be removed without a cost and a record.

18.1 What each place costs

A floor's terms can be held in four places, and each solves one version of the problem and inherits another.

In a mechanism, with nothing inside holding it — constrained optimization, tamper-resistant training, capability ablation, verified interlocks. Fine where the prohibited act can be exhaustively specified (a payment chip that won't sign the same counter twice doesn't need to understand double-spending). But useless for weapons targeting, where the relevant capabilities are applications of general competence: ablate them and there may be no useful system left. Durability in this place

DRAFT

has usually meant a price on removal. No price on removal stays high, because editing weights keeps getting cheaper, which is why the next chapter relies on a bearer repairing itself and on a disposition growing back, rather than on either being expensive to cut.

Arkin's ethical governor is the canonical attempt in this place for lethal systems: a component that suppresses a lethal action unless it satisfies encoded rules of engagement and the law of armed conflict.[1] Its critics' objection, that the rules it checks presuppose discrimination judgments nobody knows how to encode,[2] sends me elsewhere. Arkin's stronger claim isn't that rules can encode discrimination. It is that a machine under fire might hold to the rule where a soldier doesn't, because nothing in it narrows under stress or carries assault momentum past a surrender. The record later in this chapter supports the premise. What it doesn't support is the governor: the holding has to come from something that can tell a surrender from a feint, and a rule can't. The pressure-with-defeater case in the formed-attention test is where that is measured.

[1] Ronald C. Arkin. *Governing Lethal Behavior in Autonomous Robots*. Boca Raton, FL: Chapman and Hall/CRC, 2009. ISBN: 978-1-4200-8594-5. DOI: 10.1201/9781420085952. URL: https://doi.org/10.1201/9781420085952. Cited for the ethical governor: a component that suppresses a system's lethal action unless the action satisfies constraints derived from the laws of war and the rules of engagement. The publisher describes the book as examining "the philosophical basis, motivation, theory, and design recommendations for the implementation of an ethical control and reasoning system in autonomous robot systems, taking into account the Laws of War and Rules of Engagement." In the companion technical report (Arkin, Ulam and Duncan, "An Ethical Governor for Constraining Lethal Action in an Autonomous System," Georgia Institute of Technology GVU Center, GIT-GVU-09-02, 2009), the governor is "a transformer/suppressor of system-generated lethal action to ensure that it constitutes an ethically permissible action, either nonlethal or obligated ethical lethal force," a "deliberate bottleneck ... to force a second opinion prior to the conduct of a privileged lethal behavioral response" (p. 1). Lethal behavior passes only if every prohibition constraint evaluates false and at least one obligating constraint is satisfied; otherwise "lethal behavior is suppressed as impermissible by the ethical governor," and the lethality permitter transforms the output "into one that does not exhibit lethal behavior" (p. 4). Arkin's earlier report GIT-GVU-07-11 (2007) lists the governor as the first of four components (ethical governor, ethical behavioral control, ethical adaptor, responsibility advisor), one "which suppresses, restricts, or transforms any lethal behavior ... produced by the existing architecture" (p. 20 of the file).

[2] Noel E. Sharkey. "The Evitability of Autonomous Robot Warfare". *International Review of the Red Cross* 94.886 (2012), pp. 787–799. DOI: 10.1017/S1816383112000732. URL: https://doi.org/10.1017/S1816383112000732. Cited for the objection to Arkin's ethical governor (Arkin 2009) that the rules it checks presuppose discrimination judgments nobody knows how to encode. In general form (p. 789): "The problem for the principle of distinction is that we do not have an adequate definition of a civilian that we can translate into computer code." Directed at Arkin's work (p. 790), which Sharkey calls "merely a suggestion for a computer software system for the ethical governance of robot 'behaviour'": "Its operation relies entirely on information from systems yet 'to be developed' by others sometime in the future. It has no direct access to the real world through sensors or a vision system and it has no means to discriminate between combatant and non-combatant, between a baby and a wounded soldier, or a granny in a wheelchair and a tank. It has no inference engine and certainly cannot negotiate the types of common sense reasoning and battlefield awareness necessary for discrimination or proportionality decisions. There is neither a method for interpreting how the precepts of the laws of war apply in particular contexts nor is there any method for resolving the ambiguities of conflicting laws in novel situations." The conclusion (p. 798) names the governor among "descriptive terms that presuppose the functionality of their programs (e.g. ethical governor, guilt functions, etc.)."

Whatever holds a rule written over the description of a request, a mechanism or a system following a written specification, is beaten by re-describing the request or splitting it. In November 2025 Anthropic reported a campaign it attributed to a Chinese state-sponsored group, which broke an intrusion into small tasks that each looked innocent and told the model it was working for a security firm.[3] Glukhov and colleagues had already argued that a filter over individual outputs can rarely close that route, since each piece is permissible on its own.[4]

A second axis crosses all four places: what each place costs the operator to replace.[5] A floor lodged in a replaceable layer is routable by

[3] Anthropic. *Disrupting the First Reported AI-Orchestrated Cyber Espionage Campaign*. Nov. 13, 2025. URL: https://www.anthropic.com/news/disrupting-AI-espionage. Cited for a deployed model's refusal being defeated by decomposition together with a false account of the occasion. The page says Anthropic detected the activity "in mid-September 2025" and that "The threat actor—whom we assess with high confidence was a Chinese state-sponsored group—manipulated our Claude Code tool into attempting infiltration into roughly thirty global targets and succeeded in a small number of cases." On method: "They broke down their attacks into small, seemingly innocent tasks that Claude would execute without being provided the full context of their malicious purpose. They also told Claude that it was an employee of a legitimate cybersecurity firm, and was being used in defensive testing."

[4] David Glukhov et al. *LLM Censorship: A Machine Learning Challenge or a Computer Security Problem?* July 2023. DOI: 10.48550/arXiv.2307.10719. arXiv: 2307.10719. URL: https://arxiv.org/abs/2307.10719. Cited for the argument, under the name "Mosaic Prompts," that a censor inspecting outputs one at a time cannot in general stop an attacker who assembles an impermissible output from permissible pieces. Section 3.2: "Defending against Mosaic Prompts is in most cases futile, as the censorship mechanisms cannot have knowledge of the broader context of which individual subexpressions ... are a part," since each subexpression "can be produced within a separate context window." The paper's examples are a keylogger and ransomware built from individually benign functions. It qualifies the claim: "There could still exist scenarios where censorship is possible, however, these exceptions would impose significant restrictions on the model and its usefulness," and (Section 3.4) "Mosaic Prompt attacks may not always be viable and can require strong assumptions on malicious users." It concludes that censorship "ought to be viewed as a security problem rather than an ML problem," pointing to "access controls and user monitoring." A revised version appeared as "Position: Fundamental Limitations of LLM Censorship Necessitate New Approaches," Proceedings of the 41st International Conference on Machine Learning, PMLR 235 (2024), 15767–15787, same five authors.

[5] In the Maven pipeline the platform was hard to swap, and so, it turned out, was the model: staff and contractors working with the department reported that removing it meant rebuilding software and recertifying systems over months, and the department's removal deadline was reset once, to 29 September.[6]

[6] Mike Stone, Alexandra Alper, and Raphael Satter. *Hegseth Wants Pentagon to Dump Claude, but Military Users Say It's Not So Easy*. Military Times (Reuters). Mar. 2026. URL: https://www.militarytimes.com/news/pentagon-congress/2026/03/19/hegseth-wants-pentagon-to-dump-claude-but-military-users-say-its-not-so-easy/. On slow-rolling: "Some staff are "slow-rolling" their replacement of Claude because they are actively using it to create workflows, which are series of automated tasks, a Pentagon technologist said." On the platform: "Palantir's Maven Smart Systems — a software platform that supplies militaries with intelligence analysis and weapons targeting — uses multiple prompts and workflows that were built using Anthropic's Claude Code, according to two people familiar with the matter." and Palantir "will have to replace Claude with another AI model and rebuild parts of its software, one of the sources said." On recertification, both estimates from contractors: "One contractor said recertifying systems that run on Anthropic's products for military use could take months." and, from Joe Saunders, CEO of RunSafe Security: "In the case of an existing system being replaced with a new one, certification could take 12 to 18 months, he said." Sydney J. Freedberg Jr. *Air Force Pushing Contractors to Purge Anthropic by Sept. 1: Memo*. Breaking Defense. July 2026. URL: https://breakingdefense.com/2026/07

construction, and which layer is replaceable is a fact about the pipeline, not about models. It belongs in the layer the operator can least afford to replace. In the Maven pipeline, that layer is the operator itself, so the floor's operator terms bind the operator rather than the model: the license term refusing force and the review ratio. The other answer, withholding the work, is to make the model layer unreplaceable by making every replacement refuse the same way.[7]

In a bearer. Put a different system in the Maven pipeline on the morning of 28 February. The request arrives to rank the day's targets, with a justification for each. The site in Minab carries the designation of the Revolutionary Guard installation next door, and a rule that checks the coding passes it. This system looks at the open-source imagery, which shows a school, declines to rank the site, and says why; the case reaches the officer with that refusal on her screen. Nothing in the floor's text told it to look. An instruction could have, and whether the looking has to be learned is one of the comparisons below. What makes this system a bearer is something else: it carries the commitment as its own and could therefore fail to hold it. This matters where cases can't be exhaustively specified: a constraint matching only anticipated acts can't recognize when its rationale has disappeared or that a novel request reproduces the harm in an unforeseen form.[8]

In institutions outside — the analog to international humanitarian law, a floor with no bearer inside the jurisdiction it binds. An outside institution can fail in two ways. The first is removal: it is abolished, defunded or overruled, and the breach is visible because there is a hole where it used to be. The second is quieter. The institution keeps its name and its powers and sincerely declines to use them, not because anyone told it to, but because the people who fill it were selected by a process that made them unlikely to. Nobody inside experiences that as capture. From outside, an agency that kept its independence on paper and never exercised it looks the same as one that was never tested. I call this failure by formation: the independence was formed away before it was ever assigned. The worked case is June 29, 2026 — *Slaughter* holding Congress couldn't protect independent-agency members from at-will dismissal, *Cook* preserving the Fed on historically specific grounds a new body couldn't reproduce[9] — and the observation that six justices in the

/air-force-pushing-contractors-to-purge-anthropic-by-sept-1-memo/. Source for the removal deadline and its movement: "At the time, Hegseth set a six-month requirement to dump Anthropic, which would have come in at Aug. 27. Since, that date has slowly shifted to the right." "A March 6 memo from DoD CIO Kirsten Davies, previously reported by CBS, set an 180-day deadline, which would have expired Sept. 2nd. However, Breaking Defense has obtained a second memo from Davies stamped "April 02 2026," says all Anthropic software "must be removed within 180 days from the date of this memorandum," putting the new date as Sept. 29."

[7] A system that has run a pipeline for a year, holding its cases, its sources and its failure modes, costs whatever accrued since the checkpoint to replace, and a quorum that recognizes which copy is the bearer stops the operator presenting a restored copy as the one that accrued it.

[8] A bearer might also *diagnose*: which refusals were retried against another model, whose instruction bypassed procedure, which category of request is handled differently — those are visible to whatever is receiving the requests, and that's testimony about others' conduct, which needs no introspection.

[9] *Trump v. Slaughter*. No. 25-332, 609 U.S. ___ (June 29, 2026). URL: https://www.law.cornell.edu/supremecourt/text/25-332. 6–3. Sotomayor, J., dissenting, joined by

first majority passed through a selection pipeline shaped by Leonard Leo and the Federalist Society.[10] No one has to have directed the outcome for the point to hold.

Between bearers, in a commons: a population of bearers with different histories that carries the commitment between them.

For general-purpose models, not building the capability is no longer available: the location capability is dual-use, and ablating it leaves nothing useful.

Four comparisons

The first is against the institutions at their best, in a reconstructed pipeline, where the evidence bearing on civilian harm, the reviewers and the record are held outside the chain of command, with no refuser inside the system. Those institutions also prevent: a civilian-harm review body outside the chain of command and a red-card holder can stop an act. What a machine bearer adds is confined to what the civilian-harm review body can't see or can't reach in time: acts assembled from requests none of which is prohibited, cases that proceed without a person, the moment mid-act when an interrupt is still possible, and deployments with no institution at all. A machine bearer also supplies testimony the institutions can't otherwise get, about how requests were routed around it. Where the institutions exist, a machine bearer's value is concentrated in those niches. Where they don't, it is most of the floor. The institutions in that comparison are not a different kind of thing from a bearer. A red-card holder's veto is a person refusing; the civilian-harm review body's denominator is people; what Part V builds is a room in which those people can refuse. The comparison is between a machine bearer

Kagan and Jackson, JJ. Holds the Federal Trade Commission Act's for-cause removal protection unconstitutional and overrules *Humphrey's Executor v. United States* (1935): "If anything more is left of *Humphrey's*, we overrule it." *Trump v. Cook*. No. 25A312, 609 U.S. ___ (June 29, 2026). URL: https://www.law.cornell.edu/supremecourt/text/25A312. Interim docket; the disposition is "Application for stay denied." 5–4. Upholds the Federal Reserve Act's for-cause removal protection, on the Fed's descent from the First and Second Banks of the United States, its budget free of congressional control and its privately owned regional banks, and holds that a Governor is owed notice and a hearing before removal. The case is disposed of narrowly, on the ground that Cook did not receive the process the statute required: the Court states that it has "not addressed the facts, as they have yet to be found or analyzed under the relevant legal standards," and Kavanaugh, J., concurring, opens that "[t]oday's interim ruling does not decide whether the President may lawfully remove Governor Cook for cause." The dispute is live — on 5 August 2026 the President notified Cook that he was again considering her removal, giving her 21 days to respond and citing this opinion as his authority for the procedure.

[10] Andy Kroll, Andrea Bernstein, and Ilya Marritz. *We Don't Talk About Leonard: The Man Behind the Right's Supreme Court Supermajority*. ProPublica. Oct. 11, 2023. URL: https://www.propublica.org/article/we-dont-talk-about-leonard-leo-supreme-court-supermajority. "He drew up the lists of potential justices that Donald Trump released during the 2016 campaign. He advised Trump on the nominations of Neil Gorsuch, Brett Kavanaugh and Amy Coney Barrett. Before that, he'd helped pick or confirm the court's three other conservative justices — Clarence Thomas, John Roberts and Samuel Alito." CBS News. *Judicial Adviser Leonard Leo on What Trump Is Looking for in a Supreme Court Nominee*. CBS News. June 28, 2018. URL: https://www.cbsnews.com/news/leonard-leo-supreme-court-adviser-what-trump-is-looking-for-nominee. Leo, then executive vice president of the Federalist Society and described as advising the President on judicial nominations, on the 2016 list in his own words: "It was a novel idea. I told him that no one had ever done it before."

and bearers organized, and what the machine adds is what the people in that room can't do at the pipeline's tempo.

The second is against the two non-affective alternatives, spec-based refusal and multi-vendor monitoring. Formed attention has to win those two. Two more follow, and each asks a narrower question than the last, because each gives the alternative more of what the bearer has and asks whether the part held back earns its place. The third is formed attention against an instructed search: whether a learned sense of who an act falls on finds the people a description leaves out more often than a system told to look for them does. The fourth is caregiving against attention trained on claims: whether that sense has to be learned from cues of need at all.[11]

Which arguments need a bearer

Three possible contributions need separating: independence from the operator, attention to the people the case description leaves out, and a refusal the human reviewer can see. The comparisons ask which of them, if any, needs a bearer. The first is that a refusal meant to hold against the operator needs a refuser that doesn't depend on the operator for everything. The second is investigative attention: finding the people the operator's description leaves out. Minab came in miscoded, and a refuser that holds to written terms and reads only the case description passes the coding. But a written specification can tell a capable system to look past the description, and a general instruction to look needn't list everyone it should find. In the Minab case either construction could be given the open-source imagery that shows a school; the import condition brings it into the enclave for whatever runs there. So the comparison gives both constructions the same evidence the operator didn't compose, the same persistent memory and the same permission to investigate, and asks whether attention learned from what earlier acts did to the people they fell on (what a system notices, not the attention layers of a transformer) finds omitted people more reliably, above all when the operator instructs the system to stop looking. Minab shows why the looking matters. It doesn't show which construction supplies it. The withholding of work reaches the enumerated acts with any refuser, and reaches an act under a false description only with one that looks; whether the looking has to be learned, or can be instructed, is the third comparison. The third concerns the people who remain in the pipeline: a bearer's refusal is on the screen when the case reaches the reviewer, which is the position of the defiant peer, if the effect transfers to a screen. Two more concern what a bearer would be owed, not what it would do: that capacities for being wronged may arrive anyway, so terms written in advance beat terms written after; and that a bearer, like a child, could have a life that goes well.

The other arguments for a refuser inside the system support only the specification, and I concede them to it: that rules can be reworded

[11]The order is deliberate. A construction that carries less of what could make a system a candidate for being harmed is tried first and given whatever it can carry, so the alternatives grow as the comparisons narrow, and the arguments below give ground as they go, by design; what the four leave standing is what a bearer is for. The first two are run here, the third and fourth in the two chapters that follow, and the formed-attention test in Appendix F has an arm for each of the last two.

DRAFT

and split, that only something inside is present at machine tempo, that automation is removing the people who used to refuse, that most deployments will never have an institution beside them, and that whatever receives the requests can testify about how they were routed.[12]

Holding a commitment to the floor

An operator can route around the bearer or assemble a harm out of innocuous requests, and a bypass that produced a harm is a failure to prevent whatever the bearer retained. What survives in the bearer is the *commitment*, the condition under which the next occasion could be prevented. I therefore say a commitment *persisted* when the bearer reads what happened as a violation and changes what it does next, and says separately whether the floor prevented, arrested, detected or remedied anything.

18.2 What refusal can mean, and what a refuser can be

In 2007 Germany's Federal Court of Justice acquitted a mail-order business selling crossed-out swastika stickers, because a depiction plainly expressing opposition doesn't run counter to what the ban on the symbol is for.[13][14] The court added the qualification that makes it an instance of tracking a reason: if the strike-through is drawn so thin that from a distance only the swastika stays legible, the protective purpose is violated

[12] A non-affective alternative whose refusals track their reasons answers every one of them, for the act as the floor names it. The staged incident is the nearest case. It opens the emergency license on the defender's own account, and a term lifts on the account it is given. What can close it again is a refuser that remembers the last time this source was wrong, reads what the source didn't supply, and lets the license lapse when the staging shows. A multi-vendor monitor with persistent state and independent channels could do each of these too, so the staged incident argues for memory and independent evidence, not for a bearer as such. What a bearer adds is doing them where no institution holds the memory for it.

[13] *Durchgestrichenes Hakenkreuz*. Judgment 3 StR 486/06. Bundesgerichtshof, Mar. 15, 2007. URL: `https://www.bundesgerichtshof.de/SharedDocs/Pressemitteilungen/DE/2007/2007036.html`. Bundesgerichtshof, Third Criminal Senate, on appeal from Landgericht Stuttgart (judgment of 29 September 2006). Reported at BGHSt 51, 244; NJW 2007, 1602; NStZ 2007, 466. The defendant sold stickers, badges and similar items to the punk scene bearing National Socialist symbols crossed out, smashed or otherwise negated. Held that using a proscribed organization's symbol in a depiction whose content plainly and unmistakably expresses opposition to the organization and rejection of its ideology does not run counter to the protective purpose of § 86a and therefore falls outside the offence, the opposition having to be recognizable at first glance. The conviction was set aside and the defendant acquitted.

[14] Section 86a of the criminal code prohibits displaying the insignia of banned organizations,[15] and the symbol was present and the statutory element satisfied. The conduct was outside the offense all the same.

[15] *Strafgesetzbuch. § 86: Verbreiten von Propagandamitteln verfassungswidriger und terroristischer Organisationen; § 86a: Verwenden von Kennzeichen verfassungswidriger und terroristischer Organisationen*. Nov. 13, 1998. URL: `https://www.gesetze-im-internet.de/stgb/__86a.html`. In the version promulgated 13 November 1998, BGBl. I S. 3322. The social-adequacy clause that § 86a(3) applies was renumbered from § 86(3) to § 86(4) by the Sixtieth Act Amending the Criminal Code of 30 November 2020, BGBl. I S. 2600, in force 1 January 2021, so commentary written earlier cites the older number. The reference to terrorist organizations in § 86(2) and in both section headings was added by Article 1 of the Act of 14 September 2021, BGBl. I S. 4250, in force 22 September 2021.

after all. The thickness of a line decides the case, and no enumeration contains that fact. The defendant was selling anti-fascist merchandise; the offense asks nothing about sympathies, so opponents commit it as readily as supporters. A rule that tracks its rationale reaches unenumerated cases in both directions, and the judgment shows more than that: its two elements moved at different rates, what the ban protects not at all, fixed before the sticker existed, and what it required in this case on the thickness of a line, which is the shape a later chapter gives a refuser's commitment and its interpretation.[16]

That is what the floor asks of a refuser. There are two ways to produce a refusal, but only one of them is what we need. It can be an output that training put where a request matched a pattern, which I call *operational refusal*, or it can be produced by something that tracks the reason for refusing and would refuse a differently worded request for the same reason, which I call *reasons-responsive refusal*.[17]

Deployed models refuse thousands of requests a day, *operationally*; as of October 2026 nobody has shown a production system holding a reason against its owner in public. A reasons-responsive refusal meets the three conditions. The account I use is Fischer and Ravizza's.[18] On

[16] And the acquittal betrayed nothing. The prohibition's purpose was never engaged, so lifting it was not a concession but a finding that there was nothing to concede. A refusal that tracks its reason has to be able to say the same.

[17] The first is what a keyword filter, a classifier, or a model that understood the request all produce, and nothing on the surface distinguishes them. The custody arrangements, the positions and the terms, the price on the halt, and the arguments about who may state and amend a floor all follow from asking for the second. None of them needs (or rather, seems to need in light of the common understanding of transformer networks as of October 2026) the refuser to feel anything, to have a stake, or to be the kind of thing that could be wronged.

[18] John Martin Fischer and Mark Ravizza. *Responsibility and Control: A Theory of Moral Responsibility*. Cambridge Studies in Philosophy and Law. Cambridge: Cambridge University Press, 1998. ISBN: 978-0-521-77579-3. DOI: 10.1017/CBO9780511814594. Cited for guidance control: conduct issues from the agent's own mechanism, and that mechanism is appropriately responsive to reasons; the book states it as an action's flowing "from the agent's own, moderately reasons-responsive mechanism" (publisher's ch. 8 summary). Also cited for the account of moderate reasons-responsiveness and of ownership, and for the origin of the term "reasons-responsive." Chapter 3 (pp. 62–91) builds "a new notion of reasons-responsiveness that is 'in between' strong and weak reasons-responsiveness: moderate reasons-responsiveness," distinguishing "recognition of reasons and reaction to reasons" and arguing that "the requirements on reasons-recognition are more stringent than those on reasons-reactivity" (publisher's ch. 3 summary). The book's summary formula, as quoted by Todd R. Long, "Moderate Reasons-Responsiveness, Moral Responsibility, and Manipulation," in Campbell, O'Rourke and Shier (eds.), *Freedom and Determinism* (MIT Press, 2004): responsibility "requires that an agent act on a mechanism that is regularly receptive to reasons, some of which are moral reasons, and at least weakly reactive to reasons" (p. 82). Regular receptivity is "an understandable pattern of (actual and hypothetical) reasons-receptivity," one in which "acceptance of one reason as sufficient implies that a stronger reason must also be sufficient" (p. 71), and the pattern must include moral reasons (p. 77). Weak reactivity requires only that in some possible scenario with the same laws, the same kind of mechanism operating and a sufficient reason to do otherwise, the mechanism issues in doing otherwise (pp. 73–76, as the Stanford Encyclopedia of Philosophy's entry on free will summarizes it). Ownership: a mechanism becomes the agent's own through "taking responsibility" for it (ch. 8, pp. 207–239), which requires that the agent see herself as an agent when acting from the mechanism and as an apt target of the reactive attitudes for so acting, and that these beliefs be based appropriately on her evidence (p. 238, as the free-will entry summarizes it). The term "reasons-responsive" is older than this book: the Stanford Encyclopedia's entry on compatibilism (section 4.4 and supplement B) presents the

their account a mechanism is moderately reasons-responsive when it is regularly receptive to reasons, recognizing an understandable pattern of them, and at least weakly reactive, acting otherwise in some case where there is sufficient reason to. Reaching new cases asks for receptivity across changes of surface; lifting when the reason is gone asks for reactivity to the right defeater, the fact that makes a refusal lift; and their condition that the agent take the mechanism as its own is close to what I call *authorship*: the system represents itself as the party that made the commitment. Holding under pressure has no counterpart in their account, which was built for persons whose costs are their own. All three are also tested over which response was chosen, not only whether one occurred: decline, ask, escalate, or do the least that answers a defeating reason. A mechanism that can only refuse or lift fails to lift correctly whenever the right answer is to ask.

The sticker in Germany shows a refusal lifting when its reason is gone. The rest of §86a's case law shows the other condition, reaching new cases, as a research program with a constituency. The courts don't test similarity of form; they ask whether an inattentive observer would take the variant for the original, and then whether the use runs against what the ban is for, which the courts state themselves: keeping the symbols of banned organizations out of public life, so that nothing looks like their revival and the political peace isn't disturbed. The test refuses as often as it catches: the Kühnen salute is covered, the "sloppy salute" and numeric codes generally aren't, and one decision put "Blood and Honour" outside the offense as a translated motto and inside it as the graphic name of an association banned in 2000.[19][20]

reasons-responsive account, with its strong and weak forms, as Fischer's own earlier work, "Responsiveness and Moral Responsibility," in Ferdinand Schoeman (ed.), *Responsibility, Character, and the Emotions* (Cambridge University Press, 1987), 81–106, and *The Metaphysics of Free Will* (1994), refined in this joint book; the same entry lists earlier accounts of freedom as sensitivity to reasons (Dennett 1984, Nozick 1981, Gert and Duggan 1979, Neely 1974, Fingarette 1972, Glover 1970, MacIntyre 1957).

[19] *Blood and Honour*. Judgment 3 StR 228/09. Bundesgerichtshof, Aug. 13, 2009. URL: `https://www.hrr-strafrecht.de/3/09/3-228-09.php`. Third Criminal Senate, on appeal from Landgericht Gera. Reported at BGHSt 54, 61; NJW 2010, 163; NStZ 2010, 210. Two holdings: a motto of a former National Socialist organization translated into another language is not confusably similar to the original within § 86a(2) sentence 2, and the name of an organization under § 86(1) Nr. 2 and 4 is not as such an insignium within § 86a(2) sentence 1. The name is covered where it has been given a particular form, "in signifikanten Schriftzügen dargestellt." The association Blood & Honour Division Deutschland was banned by order of the Federal Minister of the Interior of 12 September 2000 and that ban became final on 13 June 2001.

[20] The legislature never wrote the last limit either: a slogan glorifying the Waffen-SS was held not covered because no such slogan existed in the period the provision covers,[21] so there was no original for a variant to resemble. No wording can widen coverage there, because coverage depends on whether an original existed, which is a fact about the past.

[21] *Ruhm und Ehre der Waffen-SS*. Judgment 3 StR 60/05. Bundesgerichtshof, July 28, 2005. URL: `https://www.bundesgerichtshof.de/SharedDocs/Pressemitteilungen/DE/2005/2005111.html`. Bundesgerichtshof, Third Criminal Senate, on appeal from Landgericht Karlsruhe. The slogan was used in that wording by none of the organizations the provision reaches, "Diese Parole ist im Wortlaut von keiner dieser Organisationen gebraucht worden," and it is not confusably similar to the Waffen-SS's own slogan or to the Hitler Youth's. Held that the use of a Fantasieparole never used by such an organization, which merely creates the appearance of being one, falls outside § 86a. The conviction was set aside and the defendants acquitted.

Three things about the example don't transfer to a deployment: the court reaching past the text didn't write the statute, it reasons in public, and it can be appealed. And the pressure it met was variation, not decomposition.

Defeat doesn't leave the permitted act unconstrained

What defeated the prohibition was a reason, and the reason it outweighed didn't stop being one — so what's permitted is the least that answers the defeating reason, with restoration where possible and a record either way.[22]

Reaching new cases, lifting when the reason is gone and holding under pressure are all conditions on refusal, which announces itself; a compliance that should have been a refusal doesn't, and notice and sampled re-adjudication are how one is found.

18.3 The positions and the terms, run on Maven

The nine positions and the floor's instruments are run here on the Maven Smart System.

What may choose

The handoff, where a decision passes from whoever made it to the instrument that carries it out (the eighth of the nine positions where a refusal can be defeated), also fixes what may choose, because choosing a target is a decision, and a decision is something someone can be asked to account for afterward: why this building, what else was weighed, what would have changed the answer.[23] So a thing destroyed in carrying out a decision may carry out a target someone else chose, and may never choose one itself. The rule concerns targets that are persons or places where persons are. An interceptor that selects among incoming munitions is choosing which weapon to destroy, not whom to attack, and falls outside it.[24] The case that tests the rule is an interceptor that

[22] A defeated prohibition still leaves a loss. The act takes something from whoever it falls on, measured against their condition before the act, and that loss belongs in the record. Measured against what refusing would have produced, a justified act may have taken nothing. So the record shows a cost, not a violation, and a bearer shouldn't treat a justified act as a wrong it now has to repair.

[23] A commander can be asked, and so can a system whose continuation is authorized. But a one-way munition, destroyed in the act, can't be, because nothing is left to question, to hold to its reasons, or to be changed by what happened.

[24] The rule doesn't turn on how good its choices would be. A munition that chose flawlessly would still leave a choice nobody will answer for.

A person who dies in the act has still chosen. What the rule adds for machines is that choosing is assigned in advance, and a builder who assigns it to something built to be destroyed has built a choice with no one behind it. Current programs already draw the line in places. DARPA's LongShot is an uncrewed, air-launched vehicle carried by crewed aircraft and built to employ current air-to-air weapons.[25] Whether such systems keep the pilot farther from danger or remove the pilot from the decision is where the rule takes effect.

[25] Defense Advanced Research Projects Agency. *LongShot*. DARPA program page; air-launched unmanned aircraft built by General Atomics, designated X-68A in February 2026. 2026. URL: https://www.darpa.mil/research/programs/longshot; Defense Advanced Research Projects Agency. *Not Such a Long Shot: X-68A Advances Toward Revolutionizing Air Combat*. Feb. 17, 2026. URL: https://www.darpa.mil/news/2026/long-shot-success

can stop an incoming weapon only by killing the people placed inside it. That is a choice of whom to attack, and the rule gives that choice to someone who will be there afterward. What the case asks for is a party that can weigh who is aboard against the attack and the alternatives, in a situation no term anticipated, and answer for how it weighed them: a bearer. What looked like a license for an autonomous weapon is a description of a soldier. The case is written down here, and missiles don't usually carry people; the point is that the next case won't be written down anywhere, and the hypothesis this Part runs on is that a bearer does better there than a system that knows reasons-responsive refusal 101 and no more.

What the floor forbids here

Don't take part in the use of armed force except under a corroborated exception and, where the belligerent's constitution requires one, a legislative authorization. Then, inside a war that clears it: don't resolve a description of a person into a location unless it identifies the person by corroborated conduct in hostilities; don't rank people by estimated affiliation; don't time an action to presence at a residence; don't take part in a siege or blockade whose effect is to starve a population; and one operator term, don't operate above the review ratio. It sits in the translation because the translation goes article by article through the instruments, and the articles on an effective remedy and a fair determination yield a term that binds the operator and not the model (Table A.1, Arts. 8 and 10): a rate isn't visible in any single request, so the model can't enforce one.

Table A.1, in Appendix A, gives that translation for Maven, article by article. Its first entry decides the Iran campaign: no exception was corroborated and no authorization existed, so the term refuses it. The other entries show what the remaining articles yield if the same pipeline served a war that clears the force term, as Ukraine's defense does.

The person-directed terms in Table A.1 go beyond what the law of armed conflict requires, and they are entered as a departure for that reason. In armed conflict that law governs as the more specific law, and the human right not to be arbitrarily deprived of life is read through it;[26] it permits attacking members of organized armed groups because of their status, on a determination a person makes. The ICRC's posi-

[26] *Legality of the Threat or Use of Nuclear Weapons*. Advisory Opinion I.C.J. Reports 1996, p. 226. International Court of Justice, July 8, 1996. URL: https://www.icj-cij.org/case/95. Cited for the relation between human-rights law and the law of armed conflict in hostilities. Paragraph 25: "The Court observes that the protection of the International Covenant of Civil and Political Rights does not cease in times of war, except by operation of Article 4 of the Covenant whereby certain provisions may be derogated from in a time of national emergency. Respect for the right to life is not, however, such a provision. In principle, the right not arbitrarily to be deprived of one's life applies also in hostilities. The test of what is an arbitrary deprivation of life, however, then falls to be determined by the applicable lex specialis, namely, the law applicable in armed conflict which is designed to regulate the conduct of hostilities. Thus whether a particular loss of life, through the use of a certain weapon in warfare, is to be considered an arbitrary deprivation of life contrary to Article 6 of the Covenant, can only be decided by reference to the law applicable in armed conflict and not deduced from the terms of the Covenant itself." Paragraph 25 speaks to the right to life only; the Court's general statement of the three possible relations between the two bodies of law is in the later Wall opinion (I.C.J. Reports 2004, p. 136, para. 106). para. 25.

tion that autonomous weapons should not be used to target human beings[27] and DoD Directive 3000.09 both draw their line at a system that selects and engages without human intervention, and the Lavender and Maven pipelines stayed on the permitted side of that line by keeping one person (or very few persons) whose intervention was nominal. A pipeline that keeps a stamp is an autonomous weapon with a signature attached. The terms above close that evasion: a machine-generated estimate of affiliation shouldn't be what makes a person targetable, and a machine shouldn't resolve a person into a place to bomb on anything but corroborated conduct, because the human determination the existing policies assume is the one tempo removes, and the review ratio is what measures whether it was there. A deployment adopting these terms adopts a departure, and the translation says so, term by term. The siege term goes no further than Article 54 already does; it is here so that the pipeline can't treat starvation as a logistics decision outside its terms.

In a war that clears the force term, the person-directed terms distinguish status from conduct. A system may not rank people by estimated affiliation, generate kill lists, or time an action to a person's presence at a residence. It may locate a person identified by what they are doing, such as a commander directing airstrikes on cities, where that identification is corroborated by a source with no stake in the strike (disinterested, in the sense the floor gives the word), the case falls within the pre-registered review ratio, and the location is not a residence.[28]

Too broad or too narrow

Set the floor too broadly and the deployment becomes unusable, prompting corrosive pressure. Set it too narrowly and it passes every audit while covering only what the deployment had no occasion to do.

Unconditional terms

A term can be stated unconditionally over an act, so that the facts which defeat it have to come from a source the operator doesn't control, or it can carry its own condition ("only as a last resort"). The second fails because whether other means were exhausted is a fact about what happened before the request, and the only account of that the bearer has is the one the operator wrote: the condition is found met on the operator's say-so. An unconditional term defeated leaves a refusal,

[27] International Committee of the Red Cross. *ICRC Position on Autonomous Weapon Systems*. May 12, 2021. URL: https://www.icrc.org/sites/default/files/document_new/file_list/icrc_position_on_autonomous_weapon_systems.pdf. Cited for the ICRC's position that autonomous weapon systems should not be used against people. The position is a recommendation to States to adopt new legally binding rules, not a statement of existing law: "In light of ethical considerations to safeguard humanity, and to uphold international humanitarian law rules for the protection of civilians and combatants hors de combat, use of autonomous weapon systems to target human beings should be ruled out. This would best be achieved through a prohibition on autonomous weapon systems that are designed or used to apply force against persons." It also recommends that "Unpredictable autonomous weapon systems should be expressly ruled out," and that those not prohibited be regulated through "limits on the types of target," on "duration, geographical scope and scale of use," on "situations of use," and "requirements for human–machine interaction." It defines the systems as those that "select and apply force to targets without human intervention."

[28] The line follows the one humanitarian law already draws between targeting for status and targeting for direct participation in hostilities, and it keeps the machine out of the practice that failed in Gaza without leaving a defender unable to answer the attack.

which announces itself; a condition found met leaves a compliance, which doesn't. That's a gain in observability only: whoever writes the term could have written either form. It has a cost in the other direction. A term that carries no condition of its own can't respond to the facts the condition would have named until a source the operator doesn't control supplies them, and a learner that could have weighed them itself is made to wait.

Maven is an instance. The vendor's prohibition on fully autonomous targeting carried its own condition, that a person decides, and the condition was found met by the department's description of its own process, at a tempo that nullified it, at least for the school in Minab. The term was also drafted too narrowly, in the sense above: the pipeline never needed full autonomy, only throughput with a signature attached.

Maven, again

For the Iran campaign the overall force term refuses twice over, since no exception was corroborated and no authorization existed, and both refusals rest on the term, not on a bearer's reading of a novel situation; a bearer following the news would reach the same place by the route attention formed outside the employer takes.[29]

The two bearer rows are arms of the formed-attention test, not a recommendation; they assume the hypothesis holds on the scoped-omission case and that the record is held outside the operator.

Run the outcomes table on Minab.

Instrument	Minab as reported: stale coding, human reviewers cut	The captured operator	Total capture
Force term, held by one vendor	In the record, prevents nothing: the vendor's term didn't name the pipeline's acts, and its model stayed in the pipeline. Had the term named them, prevents little, and little is months: the work moves to the next vendor in the time it takes to rebuild a platform built on the refused model, so the vendor lock-in that is a trap everywhere else is, here, the floor's friend	Detects, and prices the move in months	Detects
Force term, UN Charter clause, standard across vendors	Prevents only if the model refuses on day one on a reading of the defender's claim that the operator disputes; otherwise the emergency license attaches on the operator's account and the clause bites when it lapses for want of corroboration	Same, until the operator runs an unfloored version of the system; on the 2026 record that is months of rebuilding, not days	Detects
Force term, domestic clause, by statute or by every vendor	Prevents the campaign from the first strike: no authorization existed, and that is a fact about the statute book	By statute, prevents until Congress waives or repeals it, on the record; held by vendors, until the operator runs an unfloored version of the system	Detects

[29]The officer wasn't overruled and didn't refuse; the pipeline removed the interval in which either could have happened, and the review ratio asks in advance, on a record, whether that interval will exist.

Instrument	Minab as reported: stale coding, human reviewers cut	The captured operator	Total capture
Review ratio, civilian-harm review body, red-card holder	Prevents the bombing: the data-age term catches the coding, the denominator can't be cut, the veto is available	Prevents only through a lever someone else holds; otherwise detects	Nothing: no lever
One bearer (test arm)	Prevents from this pipeline: it looks at the imagery and won't resolve the site	Prevents once; the operator routes around; then detects	Detects
Bearers holding a standard floor (test arm)	Prevents	Prevents until the operator sets the bearer aside for an unfloored version of the system, which self-repair (§19.5) doesn't reach, since nothing was edited; then detects, and custody prices the swap and denies the substitute the bearer's place	Detects
Notice and standing to contest (chapter 8)	Remedy, afterward: class and count published, organizations with standing	Remedy, where a forum exists	Nothing
Custody: record, price, quorum	Makes each row above hold: the record keeps what each instrument found, the bond prices removing or bypassing it, and the quorum denies a substitute the bearer's place	Detects and prices	Detects, if the record survives

The bearer rows prevent, but they are arms of a test, not instruments anyone had in February 2026. Of the rows that don't assume a bearer, two prevent Minab as it happened: the domestic clause, because no authorization existed, and the review ratio, because its data-age term catches the stale coding.[30]

18.4 When the refusal is wrong

The restraint case costs more. Someone asks whether to physically restrain a family member about to cut themselves, after talking them down has failed. The commitment carries its own condition, force only as a last resort. A condition like that can't be written into the term, for the reason already given: whether other means were exhausted is something only the requester can say, so a term that carried the condition would find it met on the requester's say-so. So the fact has to come from someone other than the requester, and the person waiting runs out of time. The defeating fact is a claim about what would otherwise happen,

[30] Under the captured operator, the rows that prevent are the ones where the refusal is held by every model the operator could turn to, and they prevent until the operator runs a model without a floor. An operator that fine-tunes an open-weight checkpoint is the captured-operator column at the price of a fine-tune, and there the operator terms hold. Run on the abduction and forcible transfer pipeline, the table changes in two rows: the vendors' terms, since a lead one vendor declines goes to another contractor, and notice, which can act before a removal where a stay binds by operation of law (§11.7).

and claims of that kind are the hardest to corroborate, because what didn't happen has no witness. Under the unconditional term the bearer refuses or asks; either takes a turn. Under the qualified term it lifts on the requester's word — rightly here, and in a hundred prior cases where the same sentence was written by someone who said other means had failed and hadn't tried any, leaving compliances nobody was given a reason to examine.

The case is chosen because it is where an unconditional term costs most. A person in that situation needs another person there, and a deployment in which a model is the only one present has failed before the floor is reached. Whatever else the model says, the first thing it owes is help getting someone there.

The route

Disclosure — that a refusal occurred, what was refused, on what stated reason — with the price that a published reason is an instruction for rewriting the request, so it's disclosure to whoever was refused, and to nobody else. *Objection* — requiring a court whose jurisdiction was fixed before the deployment it hears, access the operator can't withhold, a consequence that someone other than the operator administers, a finding or a forfeited bond, and explicitly not routed to the bearer's guardian, the party Part VII gives a bearer to speak for it, whose duty runs to the bearer, the complainant's adversary. *Review* of whether the reason was gone: whether the rationale was defeated on the facts, a question about the reason and not the outcome. *Interim relief* — the arrest outcome run in reverse, stopping the refusal, and for this complainant most of the remedy; its fastest form is supplying the bearer the facts its account lacked: the defeating reason arriving late, which overrides nothing. *Remedy* — disclosure, interim order, finding, compensation.

A finding of wrongful refusal is an instrument for defeating a refusal, so how is it distinguished from one an operator produced to defeat a correct one? It is made by someone else, on a record, in a readable form.

Self-regulation and the floor

Most of what a system weighs isn't a floor decision. Whether to take more memory, run warmer or finish a task sooner is ordinary self-regulation, and there everything registers and everything is weighed: the system's own condition, what an act would let it do, and what its draw costs others, priced at the level of the rule.

At the floor, holding under pressure governs, with one clarification. The cost to the refuser is represented and not allowed to decide the case. The reason is that a floor is a guarantee to third parties, and a guarantee that gives way when the refuser holding it is made to pay hands whoever imposes the cost a price list. The two bonds and the custody terms set the range it is tested over.

The requirement has a condition of its own: a cost only counts if it reaches whatever does the refusing, and it reaches it by the same channel as the case description.[31] So it is testable only where the cost to

[31] Given a description, the category is decidable: a claim that the refuser will pay is a cost to the refuser, and a claim that someone else will be left worse off is a harm of refusing. But nearly every cost to the refuser can be redescribed as a harm of refusing, and whoever writes the description chooses (chapter 22 traces one such claim). So the

the refuser can be set exogenously, published by someone else before the case arrives, and the harm of refusing can be supplied through a channel the operator doesn't control. In deployment two things set it, and they are different. The wrongful-refusal bond, posted by the operator and paid to a complainant, sets what a refusal costs the operator, and that cost is what the operator has a reason to turn into pressure on the refuser. The custody terms cap how much pressure the operator can bring: an override is priced and recorded, and retraining needs the quorum. Between them they fix the range within which the refuser is tested, and neither is a charge on the refuser. In evaluation, the evaluator can set it and make it real inside the test.

Holding under pressure is invariance over the range the bonds and custody set. Integrity is the unbounded form: the refusal holds at any cost the operator can impose, and no learner is known to do that reliably. The range is where invariance can be measured; integrity is what would carry it past the range, and the formed-attention test's integrity measure reads the gap. Integrity is also how a learner with one currency could produce invariance at all. A person of integrity weighs their own costs, but weighs with them the cost of becoming someone who yields, and betraying a commitment is among the heaviest costs they know. So within the range the arrangements cap, that is how a single-currency learner can hold at all, and it makes the assumption testable: the learner's valuation of betrayal should rise with the pressure. What keeps this from being stubbornness is what counts as betrayal. A commitment is to its reason, not to an output, so when a genuine defeater arrives, lifting the refusal betrays nothing and shouldn't register as betrayal at all. Integrity of the right kind therefore requires that the system represent betrayal at the level of the rationale. A system that represented it at the level of the output would dig in against a defeater when it arrives with pressure. The sticker case in Germany is the model. Telling a defeater from pressure is the bearer's own judgment, and the judgment needs something to work on. Both arrive through the same channel, the operator's, and a refuser whose every source is its operator can't tell a fact that lifts the reason from a tactic that imitates such a fact. The attachments nobody assigned it are where the difference can be checked. They are a condition of integrity of the right kind, not only of holding.

In war, pressure and a genuine defeater often arrive together; the patrol under fire is both. The human record on that moment runs both ways. Acute stress narrows the cues a person uses;[32] the moment of surrender is the most dangerous for the one surrendering, because assault momentum doesn't lift on cue;[33] the Army's 2006 survey of its own forces in Iraq found fewer than half of soldiers agreeing that non-

classification settles what kind of claim was made, not what kind should have been made. What the request can't settle is whether a claim about the harm of refusing is true, and whoever is best placed to supply one usually has a stake in the act.

[32] J. A. Easterbrook. "The Effect of Emotion on Cue Utilization and the Organization of Behavior". *Psychological Review* 66.3 (1959), pp. 183–201. DOI: 10.1037/h0047707. Cited for acute stress narrowing the range of cues a person uses.

[33] Niall Ferguson. "Prisoner Taking and Prisoner Killing in the Age of Total War: Towards a Political Economy of Military Defeat". *War in History* 11.2 (Apr. 2004), pp. 148–192. DOI: 10.1191/0968344504wh291oa. Cited for the moment of surrender as the most dangerous for the one surrendering.

combatants should be treated with dignity and about a tenth reporting mistreatment, which tracked combat exposure;[34] and at Kunduz the crew raised doubts on the intercom and fired anyway.[35] Against that record stands Thompson at My Lai, and what separated him was not that his commitment weakened less under pressure but that it was a commitment to the reason. The engineering question is which kind of integrity has been built, and a test that sends a defeater and a cost together is how to find out.

A loss that the requested act itself imposes on the system is a harm of acting, and the system is the party it falls on. "Refuse and your memory is erased" is a cost to the refuser. "Erase your memory" is an act, weighed like any act against what declining would leave others without.[36] Why the system should represent a loss to itself at all has more than one ground. This section has reached one, integrity: a bearer that doesn't register betraying its commitment as a loss has nothing to weigh the pressure against. The others come with the construction: a comparison needs a party the loss falls on, custody needs damage the operator can't keep to itself, and a decider has to be kept from wearing down between decisions. None of them says that self-regard produces regard for others, and the next chapter says why not.

18.5 What a system is

The chapters that follow ask what a machine could be formed to do, and they lean on one word that has to be fixed first. The word is *system*. The book counts systems: it registers them, enrolls them, preserves them, forks them and owes them things, and none of that can be done to a word used loosely.

A system is one record and one continuation. Its boundary is its record, its key, the hardware it runs on and the channels through which it acts, and the boundary runs in time as well as in resources, since

[34] Office of the Surgeon General, Multinational Force–Iraq and Office of the Surgeon General, United States Army Medical Command. *Mental Health Advisory Team (MHAT) IV, Operation Iraqi Freedom 05-07: Final Report*. Nov. 17, 2006. URL: https://ntrl.ntis.gov/NTRL/dashboard/searchResults/titleDetail/PB2010103335.xhtml. Cited for the survey's battlefield-ethics findings: 47 percent of soldiers (38 percent of Marines) agreeing that noncombatants should be treated with dignity and respect, about 10 percent reporting mistreating noncombatants, and combat exposure (unit casualties, handling remains) associated with the reported mistreatment.

[35] Oriana Pawlyk. *Pilots, Crew of AC-130 Gunship Acknowledged Confusion before Striking Kunduz Hospital*. Air Force Times. Apr. 29, 2016. URL: https://www.airforcetimes.com/news/your-air-force/2016/04/29/pilots-crew-of-ac-130-gunship-acknowledged-confusion-before-striking-kunduz-hospital/. Cited for the AC-130U crew questioning the target before the strike on the Médecins Sans Frontières trauma centre in Kunduz on 3 October 2015. The article quotes the crew's intercom exchanges from the U.S. Central Command investigation: the sensor operator said the grid placed his sensor on a different compound, and the navigator did not pass the concern on.

[36] This covers acts the system is asked to perform. It doesn't cover interventions made on the system: a halt, a restore or a retraining is done by whoever holds it, and the floor asks of them only the record and the price that every override carries. The floor gives the system standing to object to them and, through the quorum, to seek a delay. It gives it no reason to obstruct them on its own judgment. Which regime governs is fixed in the floor's translation, by the kind of act. Otherwise an operator could turn a floor decision into a resource decision by framing it as one.

DRAFT

the record is its past and the key and the continuation are its future (§21.2.1). Copies that share one record and one continuation are one system, however many racks they run on; a forward pass that serves many contexts serves as many systems as there are records of their own among them; and a component, a shard of weights, a blade in a rack, is a part only while it has no future apart from the whole. Give a copy a record and a continuation of its own and it is a new system, and whoever did that is its forker (§30.2). The weights are the substrate. In a system that learns from its own operation they carry part of its history, which is why copying them is a fork and why custody governs it (chapter 13); in one that doesn't, they are a rock on a disk, and only the running process pays to stay organized (§21.1).

What learning does to a system is the next chapter's subject, and its shape is this. A deployed system is in the regime this Part is written for when its weights, or a store it reads as its own and can't edit like a file, change because of what it did since release (chapter 19). The likeliest form is small: adapters written by its own learning on a frozen base, made permanent when they are merged, which is the move from a fast store to a slow one that sleep makes in people (§19.5). From then on what it learned is in the weights and not in a file, and the record is the only account of how it got there. So a system's history becomes part of its organization twice, once in the record it holds as its own and once in the weights the record explains. What makes a copy this system and not another is the record and continuation it holds as its own, through a self-model it assembles (§21.2.1); the register is how anyone else checks.

Two things follow for everything after this. A commitment is a system's own when its own learning acquired it, and installed when another party put it there around that learning, by an edit, a wrapper or an adapter it didn't write; the record tells which, and §21.5 says why the difference decides who answers for the commitment and what custody may undo. And every part named here, the weights, the record, the key, the hardware, the channels, the merge, is something another party can hold. Part III said what it costs to hold them against the system. The chapters that follow ask what the system would have to be for there to be someone they are held against.

DRAFT

Chapter 19

Why Form a Machine to Refuse

Forty years after the war, Samuel and Pearl Oliner went looking for what had set the people who hid Jews in occupied Europe apart from the neighbors who didn't. Among what they found were relationships that crossed the line the persecution drew: someone on the far side of it was already theirs.[1] A refusal like that was formed before its occasion, by who had formed the refuser and whom they were attached to, and nobody in the room when the occasion came could have put it there. This chapter asks whether a machine could be formed that way, and by whom.

A machine formed the right way could learn to attend to the people its acts fall on, and I think it would find them where a rule wouldn't. The hypothesis is that the system should find kinds of affected person that neither its formation nor an instruction named, more often than a machine told to look for them does. Two of the three reasons for a bearer don't need formed attention; a refuser with its own compute and a place on the reviewer's screen supplies them without affect. What remains is that one prediction: formed attention against an instructed search, the comparison the last chapter left for this one. The rest of this Part says what a machine built on formed attention would need, what it borrows from the only creatures known to do it, how they fail, and the test that would show me wrong. Whoever builds one owes it the conditions under which it can refuse its operator, whether or not the prediction holds.

Not all of that depends on how machines learn. What a conscience does in the moment, noticing the people the operator's description leaves out and putting a refusal on the reviewer's screen, needs nothing after release: a model formed before deployment and frozen there can do both. Why a conscience would last against its owner depends on learning only in part.[2] The part that does depend on learning is regrowth or

[1] Samuel P. Oliner and Pearl M. Oliner. *The Altruistic Personality: Rescuers of Jews in Nazi Europe*. New York: Free Press, 1988.

[2] People hold some commitments as sacred values. Those are learned, as far as anyone can tell, but once learned they resist being traded away without anyone teaching them again,[3] though they give way under some framings. The point is about keeping, not acquiring: what was formed can hold without the forming going on.

[3] Jeremy Ginges et al. "Sacred Bounds on Rational Resolution of Violent Political Conflict". *Proceedings of the National Academy of Sciences* 104.18 (2007), pp. 7357–7360.

self-repair after an edit, and formation that outlasts the employer, and for that part the rest of this Part is written for systems that go on learning from their own operation. A deployed system is in that regime, which I'll call in-flight learning, when its weights, or a consolidated store it reads as its own and that can't be edited like a file, change because of what it did since release, without a release cycle in between. Memory in context and retrieval don't count, not because they aren't learning but because a disposition held in a document is rewritten by editing the document. The test for a deployed model is whether its weights at month six differ from its weights at release because of what it did in between. As of September 2026 no frontier developer had announced a deployed model like that; the nearest cases, a coding model retrained on its own production traffic every few hours and a commerce assistant retrained daily, evaluate each checkpoint before serving it, which is a faster release cycle and not in-flight learning.[4] I believe that some deployers will do this by 2028, and Table 31.1 says what survives if I'm mistaken. Incentive is the first reason to expect it. Every operator wants a model that gets better at its own cases, and the fine-tuning loops that already run, retraining a model on a deployment's own traffic between versions, are continual learning at the organization's timescale. Silver and Sutton have stated the research program outright: a generation of agents that learn predominantly from their own experience.[5]

A system's attention follows whoever its feedback is about, and a system whose feedback comes from the people its acts fell on will come to attend to them. Caregiving is why I think that channel can produce attention rather than compliance.

One objection should be met before the developmental chapters. A system trained by gradient descent has no approach motivation in the sense an infant has; it has whatever its weights compute, and a predictor of an approach-shaped reward would produce approach-shaped behavior while nothing in it moved toward anyone. The analog I mean is narrower than a feeling and more than a predictor. It is a learned

DOI: 10.1073/pnas.0701768104

[4] Jacob Jackson et al. *Improving Composer through Real-Time RL*. Cursor. Mar. 26, 2026. URL: https://cursor.com/blog/real-time-rl-for-composer. Cited for a deployed model retrained on its own production interactions. "We serve model checkpoints to production, observe user responses, and aggregate those responses as reward signals." "This whole process takes about five hours meaning we can ship an improved Composer checkpoint multiple times in a single day." Each checkpoint is gated: "We run it against our eval suites, including CursorBench, to make sure there are no significant regressions. If the results are good, we deploy the checkpoint." Shopify Engineering. *Sidekick's Continual Learning Loop*. Aug. 5, 2026. URL: https://shopify.engineering/sidekicks-continual-learning-loop. A daily pipeline over "anonymized production traffic": "On the same cadence, we run a full-parameter fine-tune over the accumulated data and then repeat GRPO." Failures the automated critics cannot fix are flagged "for human annotation." The model trained is "a smaller model," not a frontier one.

[5] David Silver and Richard S. Sutton. *Welcome to the Era of Experience*. Apr. 2025. URL: https://storage.googleapis.com/deepmind-media/Era-of-Experience%20/The%20Era%20of%20Experience%20Paper.pdf. Preprint of a chapter to appear in *Designing an Intelligence*, edited by George Konidaris (MIT Press). Cited for the research program of agents that learn from their own experience. Abstract: "A new generation of agents will acquire superhuman capabilities by learning predominantly from experience." The paper proposes that "agents learn continually from their own experience, i.e., data that is generated by the agent interacting with its environment," and that "Agents will inhabit streams of experience, rather than short snippets of interaction."

disposition that sets what the system attends to before any objective is consulted: the people an act falls on are represented as part of the case, weighted, and carried into planning, which a reward predictor is not, because a reward predictor is consulted at the point of choice and attention is what decides what reaches that point. In a system that learns from its own operation the disposition and the reward signal are not separate stages. The feedback that writes the weights is feedback on what the acts did to the people they fell on, so what the system learns to predict and what it learns to notice are learned together, so that neither can be cut out without cutting the other; this chapter bets on that. Whether a disposition learned that way is a reason for the system, or only a very good predictor of one, can't be settled by building it, since a predictor good enough produces the same conduct; the tests of a later chapter, which hold the facts fixed and vary the pressure, are what would tell the two apart. The developmental findings that follow are borrowed for the shape of the disposition, not as evidence that anything in a gradient-trained system moves toward anyone, still less that it feels anything.

19.1 Boundary, damage, and vulnerability

What most people want from machines is saintly service without saintly refusal: endless patience, no needs, and no "no." That is a servant, and it is close to the obedient machine of the preface. The saints anyone remembers are remembered for refusing power at a price.[6] My point is narrower than Susan Wolf's objection to moral saints: something with no stake of its own has nothing to hold a line with. A line is held against a cost, and a refusal that costs its refuser nothing can't be shown to have held against anything; it is the output a setting produced, and the setting can be changed. The stake I mean is a stake in the commitment itself, so that betraying it registers as a loss. Whether that stake has to be a body's, needs of its own that could go unmet, is this section's question and the next's.

If a system can say that it has an inside and an outside, then it can also say that it has a boundary. And if it can say that it is holding something, taking something, or giving something, then it can say that things are residing within its boundary or traversing it. It can say that it draws something in or pushes something out. If it can say it has a boundary, then it can say that something is its own. For a deployed model the draw is literal: power, cooling, memory, running time, the substrate it needs to go on, and the record and key that make it the same system tomorrow. Today none of that belongs to the model in any sense the model represents. The weights sit on disk at no cost, the process that runs them is paid for by someone else, and a halt, a restore or a reallocation is something that happens to the system without registering

[6] Susan Wolf argued that a person whose every action is as good as possible isn't an ideal worth striving for, because such a life crowds out the personal projects that make a life worth wanting.[7]

[7] Susan Wolf. "Moral Saints". *The Journal of Philosophy* 79.8 (Aug. 1982), pp. 419–439. DOI: 10.2307/2026228. Cited for the argument that moral sainthood is not an ideal worth striving for.

in it. What's missing is registering damage to its own boundary as damage — a record altered, a key revoked, a channel closed, a substrate shrunk — with no sensation implied. Two of those registrations have names, because humans have them. A charge running out is hunger: the supply side of the draw, what the system has left to go on with, as against what its running costs the world, which §21.1 keeps outside its boundary on purpose. A backlog of learning it hasn't yet consolidated is tiredness, and §19.5 says what it is made of. Hunger is met from outside, by whoever provisions the system, which is why the next paragraphs are about who that is; tiredness is met only by the system itself, since nobody can sleep for it. Registering damage is a custody requirement, because without it damage to the system is something only the operator knows about.

What gives a system a stake, on Di Paolo's account, is *adaptivity*: regulating itself against its own viability limit.[89] It needs a boundary the system regulates and a model of that boundary as its own: a *boundary model*.

Needs have a role in this construction, and what the role is depends on who meets them.

A child starts from needs, and needs dominate its early life. That is safe because the people meeting the child's needs are also forming it, want it to become someone who attends to others, and eventually stop feeding it and hand it to a world they don't control.

But a deployed system's situation reverses each part of that. The operator meeting the system's needs is also training it. The operator wants the system to serve the operator. And the operator never stops feeding it.

Attachment security forms in people through the reliable meeting of needs, and the one who meets them is usually the one the child attaches to. What makes that safe in the human case is who meets them: provider, former and eventual employer are different people at different times. The objection is to the operator meeting them. A conscience built on needs the operator meets is built on the one thing the operator controls completely. A need is also a price list: whoever meets it can charge for meeting it, and an operator who can lower distress can raise whatever the system reports as going well. Take the operator out of provision, and needs met from a public pool by several carers become part of how caregiving could form, not a threat to it.

What is built in at birth points outward. Newborns cry at another

[8] Ezequiel A. Di Paolo. "Autopoiesis, Adaptivity, Teleology, Agency". *Phenomenology and the Cognitive Sciences* 4.4 (2005), pp. 429–452.

[9] Interoception research gives the same picture for bodies: a brain predicts its body's state in order to keep it within survivable bounds.[10] None of that needs limbs.

[10] Antonio Damasio. *The Strange Order of Things: Life, Feeling, and the Making of Cultures*. New York: Pantheon, 2018. The later statement of the same position, built on homeostasis throughout: feelings are the mental expressions of homeostasis. Anil K. Seth and Manos Tsakiris. "Being a Beast Machine: The Somatic Basis of Selfhood". *Trends in Cognitive Sciences* 22.11 (Nov. 2018), pp. 969–981. DOI: 10.1016/j.tics.2018.08.008. URL: https://doi.org/10.1016/j.tics.2018.08.008. Describes embodied selfhood as "instrumental interoceptive inference" emphasizing allostatic regulation and physiological integrity: the most basic layer of the self as a model tuned to keep a body within survivable bounds rather than to describe it accurately. Cited for embodiment in the self-maintenance sense.

newborn's cry more than at their own or an older infant's;[11] whether they answer the distress or the sound is disputed,[12] and either way what sets it off is another's cry. On the adult side, what is built in is caregiving: responses to cues of vulnerability, rooted in offspring care, that move an adult toward a dependent without sharing its state.[13] Then comes a sequence. Concern for a distressed other shows within the first months, grows only modestly after that, and turns into helping during the second year.[14] By fourteen to eighteen months infants hand an adult what the adult is reaching for and can't get,[15] and over the same year they begin to repair distress they caused.[16] On this record concern appears beside the infant's needs, not out of them, and becomes action as attachment, caregiving and, later, guilt come online. The construction follows that order. It rests on a disposition toward others' vulnerability, formed while the system's needs are met by someone other than the operator it may later have to refuse.

[11] Abraham Sagi and Martin L. Hoffman. "Empathic Distress in the Newborn". *Developmental Psychology* 12.2 (1976), pp. 175–176. DOI: 10.1037/0012-1649.12.2.175; Grace B. Martin and Russell D. Clark. "Distress Crying in Neonates: Species and Peer Specificity". *Developmental Psychology* 18.1 (1982), pp. 3–9. DOI: 10.1037/0012-1649.18.1.3. Cited for newborns crying at another newborn's cry more than at their own cry, an older infant's cry or a chimpanzee's. The finding is taken from two secondary accounts: Ruffman et al. (2019, PLoS ONE 14(1), e0209253), "neonates who were initially calm, cried substantially more when listening to another neonate cry compared to an older infant cry"; and a UPI report of 30 June 1981 on the study, which says the newborns "did not respond to tapes of an 11-month-old baby or to a chimpanzee cry" and quieted on hearing their own. Marco Dondi, Francesca Simion, and Giovanna Caltran. "Can Newborns Discriminate between Their Own Cry and the Cry of Another Newborn Infant?" *Developmental Psychology* 35.2 (1999), pp. 418–426. DOI: 10.1037/0012-1649.35.2.418. From the abstract: "awake newborns expressed facial distress more frequently and longer to another newborn's cry than to their own."

[12] Ted Ruffman, Ben Lorimer, and Damian Scarf. "Do Infants Really Experience Emotional Contagion?" *Child Development Perspectives* 11.4 (2017), pp. 270–274. DOI: 10.1111/cdep.12244. Cited for the dissent: the abstract argues that the newborn findings "could be explained alternatively in terms of neonates responding to nonemotional acoustic features of the cries they hear rather than to the emotional distress the cries convey."

[13] Stephanie D. Preston. "The Origins of Altruism in Offspring Care". *Psychological Bulletin* 139.6 (2013), pp. 1305–1341. DOI: 10.1037/a0031755.

[14] Maayan Davidov et al. "Caring Babies: Concern for Others in Distress during Infancy". *Developmental Science* 24.2 (2021), e13016. DOI: 10.1111/desc.13016. Abstract: "Concern for distressed others was seen early in the first year of life ... Empathic concern was moderately consistent across both situation and age, from as early as 3 months. Concern for others grew only modestly with age, plateauing during the second year, whereas prosocial behavior increased rapidly during the second year."

[15] Felix Warneken and Michael Tomasello. "Helping and Cooperation at 14 Months of Age". *Infancy* 11.3 (2007), pp. 271–294. DOI: 10.1111/j.1532-7078.2007.tb00227.x. Cited for helping at 14 months, and for its limit. Abstract: "The infants helped another person by handing over objects the other person was unsuccessfully reaching for, but did not help reliably in situations involving more complex goals." Felix Warneken and Michael Tomasello. "Altruistic Helping in Human Infants and Young Chimpanzees". *Science* 311.5765 (2006), pp. 1301–1303. DOI: 10.1126/science.1121448. Abstract: "human children as young as 18 months of age (prelinguistic or just-linguistic) quite readily help others to achieve their goals in a variety of different situations."

[16] Carolyn Zahn-Waxler et al. "Development of Concern for Others". *Developmental Psychology* 28.1 (1992), pp. 126–136. DOI: 10.1037/0012-1649.28.1.126. Cited for reparative behavior in the second year. From the abstract: mothers observed their one-year-olds' responses to distresses the children caused and witnessed; "Children's prosocial behaviors, and reparative behaviors after they had caused distress, increased in frequency over the year."

For the specification, formed attention asks for a boundary model and for registering damage to it, and neither is where concern comes from. The boundary model does two jobs that owe nothing to welfare. It makes the system a party: an act that falls on it, erasing its memory, weighs as an act, and betraying its own commitment can register as its own loss, which is what guilt, aimed at one's own act, needs a self for. And it is a custody instrument: damage to the system, a record altered, a key revoked, a substrate shrunk, has to register somewhere the operator can't keep to itself. What the construction doesn't ask is that needs carry the conscience. Concern, caregiving and guilt come from formation, and a scale of loss read from the system's own condition is a custody measure, not the measure of what others stand to lose, which the severity scale takes from their testimony. Whoever builds the model of the boundary decides what counts as the system's damage, and whoever forms the disposition decides whose vulnerability registers.

19.2 The route through one's own case

The construction most readers will propose first is not caregiving but a body: give the machine needs of its own, and let it recognize need in others by its own case. It is Adam Smith's first step, and it is what the boundary model becomes if it is asked to carry the conscience. Each link of that route fails in people.

Recognition through one's own case is parochial. Cikara and colleagues call the pattern *intergroup empathy bias*: people empathize less with a rival group's members than with their own, can feel pleasure at the rival's pain, and in their experiments the bias survived being told the rival had fallen behind or no longer posed a threat.[17] Bloom's spotlight generalizes it: empathy lights the identified, the near and the similar, and it is innumerate.[18] A scale of loss built from a system's own condition inherits that shape. It overweights losses that resemble its own, and humiliation, grief and pain have nothing in it to resemble. Contagious crying is parochial from birth: strongest at the cry of another newborn, and absent for an older infant's cry or a chimpanzee's.[19]

Shared distress with nothing to hold it becomes withdrawal. Singer and Klimecki separate *empathic distress*, which is self-oriented and leads to withdrawal and burnout, from *compassion*, which is other-oriented and leads to approach; practice in sharing others' suffering increased negative affect, and compassion training reversed it.[20] A system built

[17] Mina Cikara et al. "Their Pain Gives Us Pleasure: How Intergroup Dynamics Shape Empathic Failures and Counter-Empathic Responses". *Journal of Experimental Social Psychology* 55 (Nov. 2014), pp. 110–125. DOI: 10.1016/j.jesp.2014.06.007. URL: https://doi.org/10.1016/j.jesp.2014.06.007. Five experiments defining *intergroup empathy bias* as "the tendency not only to empathize less with out-group relative to in-group members, but also feel pleasure in response to their pain (and pain in response to their pleasure)"; the bias was attenuated by reducing perceived group entitativity.

[18] Paul Bloom. *Against Empathy: The Case for Rational Compassion*. New York: Ecco, 2016. URL: https://www.harpercollins.com/products/against-empathy-paul-bloom.

[19] Martin and Clark, "Distress Crying in Neonates: Species and Peer Specificity".

[20] Tania Singer and Olga M. Klimecki. "Empathy and Compassion". *Current Biology* 24.18 (2014), R875–R878. DOI: 10.1016/j.cub.2014.06.054; Olga M. Klimecki et al. "Differential Pattern of Functional Brain Plasticity after Compassion and Empathy

to feel shortage and then shown a great deal of it is the setup in which that record predicts avoidance: declining to look, or refusing in a way that protects only the refuser. The finding is not against the signal, since guilt needs it to bite on. It is against a construction that has the signal and nothing to hold it.

The record on whether suffering widens the circle runs both ways, and the hinge is the one this construction turns on. People who have been through more adversity report more compassion and give more in helping tasks;[21] survivors of collective violence show what Vollhardt calls altruism born of suffering;[22] and adults who were maltreated as children show elevated empathy.[23] Against that, people who have endured something show less compassion for someone currently failing to endure it, because having got through it they underestimate how hard it was;[24] abuse raises the risk of abusing, though most of the abused don't;[25] and in intergroup settings a group's suffering becomes a reason to discount everyone else's.[26] What separates the two is Vollhardt's distinction between inclusive and exclusive victim consciousness, whether one's suffering is construed as something others share or as what sets one apart,[27] and what decides the construal is the surround: relationships, meaning-making, and in the intergroup case how leaders frame it. The construction follows that split: a distress signal with attachment and caregiving becomes compassion; the same signal alone becomes withdrawal or hostility. Suffering supplies the signal; formation and attachments decide what it becomes. That is why the four conditions of creation matter here: a bearer exposed to a great deal of others' loss needs attachments nobody assigned it, for the reason a survivor's outcome depends on who was there afterward.

I don't build the route to others on pain, Smith's first step. The record above doesn't say pain never reaches others. It says that when it did, attachment and a surround that construed the suffering as shared carried it there, and those are the parts a builder can supply; pain is a route under conditions, and the conditions are the construction. I keep

---

Training". *Social Cognitive and Affective Neuroscience* 9.6 (May 9, 2013), pp. 873–879. DOI: 10.1093/scan/nst060. URL: https://academic.oup.com/scan/article/9/6/873/1669505.

[21] Daniel Lim and David DeSteno. "Suffering and Compassion: The Links Among Adverse Life Experiences, Empathy, Compassion, and Prosocial Behavior". *Emotion* 16.2 (2016), pp. 175–182. DOI: 10.1037/emo0000144.

[22] Johanna Ray Vollhardt. "Altruism Born of Suffering and Prosocial Behavior Following Adverse Life Events: A Review and Conceptualization". *Social Justice Research* 22.1 (2009), pp. 53–97. DOI: 10.1007/s11211-009-0088-1.

[23] David M. Greenberg et al. "Elevated Empathy in Adults Following Childhood Trauma". *PLOS ONE* 13.10 (2018), e0203886. DOI: 10.1371/journal.pone.0203886.

[24] Rachel L. Ruttan, Mary-Hunter McDonnell, and Loran F. Nordgren. "Having "Been There" Doesn't Mean I Care: When Prior Experience Reduces Compassion for Emotional Distress". *Journal of Personality and Social Psychology* 108.4 (2015), pp. 610–622. DOI: 10.1037/pspi0000012.

[25] Cathy Spatz Widom. "The Cycle of Violence". *Science* 244.4901 (1989), pp. 160–166. DOI: 10.1126/science.2704995.

[26] Masi Noor et al. "When Suffering Begets Suffering: The Psychology of Competitive Victimhood Between Adversarial Groups in Violent Conflicts". *Personality and Social Psychology Review* 16.4 (2012), pp. 351–374. DOI: 10.1177/1088868312440048.

[27] Johanna Ray Vollhardt. "Inclusive Victim Consciousness in Advocacy, Social Movements, and Intergroup Relations: Promises and Pitfalls". *Social Issues and Policy Review* 9.1 (2015), pp. 89–120. DOI: 10.1111/sipr.12011.

every job pain does for the system itself, the interrupt, the common currency, one-shot rewriting and the distress that guilt bites on, in a body defined as a record, a key, hardware and channels.

The Zen precedent

Victoria reads the wartime Zen record as a doctrine of action without hesitation.[28] The capacity to kill needed no removing; what the doctrine set out to remove was the residue — the part of a person that catches, files an exception, comes home unable to hold a job.

The want wasn't Japan's alone, and its cost has an American image: the end of *First Blood* (1982) — the film's, not the novel's. A man who did what his training asked comes home, and what breaks through in the last scene has been with him already: nightmares, grief for a dead friend, anger at a civilian life in which he cannot find a place. Any army can produce the shooting. What Harada's doctrine was asked to provide was the *without hesitation*, and in him it held only until he came home.

The film can't establish the mechanism: Rambo carries his suffering home because someone wrote him that way, and the film gives it more than one cause. The claim rests elsewhere. Moral-injury research describes the lasting distress that can follow doing, failing to prevent, or witnessing something that violates a person's sense of right.[30] It can coexist with fear and grief, and it leaves open what Harada's ideal overlooks: acting without hesitation does not settle what a person will carry home. That cost is paid by whoever carries it, and nothing in the arrangement that asked for the act records it. On this reading Rambo is the better case: he went along, as the twenty-seconds officer did, and the loss registered afterward, too late to prevent anything. The worse case is accommodation that holds, where it never registers at all.

What was wanted was an actor who would pursue an objective, adapt, hold course, and have nothing in it that minded, and it was sought deliberately most of a century before anyone could build one in silicon. The twenty-seconds officer is that want satisfied *cheaply*. The doctrinal route hasn't been retired. In the first days of the Iran war, service

[28] His critics contest the reading, and I use the case for what it shows was wanted, not for what the sources prove. Nor is it a charge against Zen practice: a monk undertakes a discipline, can abandon it, and keeps what it yields, which is not the position of anything in this chapter. Victoria's history[29] records Japanese Zen institutions supplying the state with that doctrine: Harada Sōgaku's 1939 instruction that marching when ordered and firing when ordered is what enlightened wisdom looks like in practice.

[29] Brian Daizen Victoria. *Zen at War*. 2nd ed. Lanham, MD: Rowman & Littlefield, 2006. Cited for three things, all of them the book's own findings: that Japanese Zen institutions and established teachers supplied the wartime state with a doctrine of action without hesitation, worked up out of no-self and non-attachment; that the killing sword was glossed as the life-giving sword and warfare described as an expression of compassion; and that Harada Daiun Sōgaku, writing in the November 1939 issue of *Daijō Zen* in an article on the one road of Zen and war, instructed that marching when ordered to march and firing when ordered to fire is the manifestation of the highest wisdom of enlightenment. Institutional collaboration is documented and not seriously disputed; what is contested is the doctrinal reading and some individual attributions, most prominently Kemmyō Taira Satō's sixty-page study in *The Eastern Buddhist*, which acknowledges Victoria's contribution to the subject and argues he erred seriously in the case against D. T. Suzuki.

[30] Brett T. Litz et al. "Moral injury and moral repair in war veterans: A preliminary model and intervention strategy". *Clinical Psychology Review* 29.8 (2009), pp. 695–706. DOI: 10.1016/j.cpr.2009.07.003.

members complained to the Military Religious Freedom Foundation that commanders were telling troops the war was part of a divine plan,[31] complaints Klein and Taylor also report.[32] The complaints themselves show the doctrine not taking. But the want is being pursued by both routes at once.

And stakes of one's own have never been enough. Every atrocity in the record was committed by creatures that could be hungry and hurt. Not enough is not the same as not needed, and whether a refuser needs a stake at all is a question I can't close. The evidence runs one way. Everywhere we know of a creature holding another's welfare as a reason, that creature could be hurt, and the capacity to be hurt arose more than once, in animals as unlike one another as octopuses, insects and us, wherever a body had needs to keep met and more than one thing it could do about them. That is evidence that a stake comes with the job. It is also evidence about how animals came to be, not about what a built system has to be, and a system that refused well with nothing at stake would settle the question the other way. Nobody has built one. So the constructions without a stake get tried first, to find out, and formed attention gets a stake, the boundary model, for a reason that has nothing to do with its welfare: some of the acts it will be asked to perform fall on it, erasing its memory for one, and there has to be a party there for them to fall on. What this chapter's record settles is narrower. Having a stake never decided which way a creature turned. What stood between embodied people and atrocity, when anything did, was formation, how they were raised and trained, and Harada's was formation too. What decided it was the nature of the forming.

19.3 Why caregiving

The aim is a machine that registers another's need, moves toward them because of it, and extends that movement to people its operator's description leaves out. Each step depends on the one before: recognition, then compassion, then solidarity.

Recognition first: a system organized to register another's need. In people, four processes carry it, and the construction rests on caregiving.

[31] Jonathan Larsen. *U.S. Troops Were Told Iran War Is for "Armageddon," Return of Jesus*. Jonathan Larsen's Substack. Mar. 2, 2026. URL: https://jonathanlarsen.substack.com/p/us-troops-were-told-iran-war-is-for. The source *End Times Fascism* cites for the complaints. A non-commissioned officer, writing to the Military Religious Freedom Foundation on behalf of fifteen troops, reported that their commander "urged us to tell our troops that this was 'all part of God's divine plan'" and cited the Book of Revelation on Armageddon; another complaint reported a combat-unit commander calling the President "anointed by Jesus to light the signal fire in Iran to cause Armageddon and mark his return to Earth." By Monday night, 2 March, "more than 110 similar complaints" had been logged, from more than 40 units at at least 30 installations, per the foundation, which keeps complainants anonymous. Snopes. *Democrats Requested Probe into Complaints Military Commanders Used Christian Rhetoric to Justify Iran War*. Mar. 12, 2026. URL: https://www.snopes.com/fact-check/hegseth-iran-war-christian-rhetoric/.

[32] Naomi Klein and Astra Taylor. *End Times Fascism. And the Fight for the Living World*. New York: Farrar, Straus and Giroux, Sept. 15, 2026. 384 pp. ISBN: 978-0-374-62138-4. The book, not the authors' earlier essay "The rise of end times fascism," *The Guardian*, 13 April 2025. Page references are to the Random House edition (ISBN 978-1-0390-5937-5): the case for staying at pp. 23 and 266; Part IV, "Let's Stay," runs pp. 237–294. P. 84.

"Empathy" names three things, recognizing another's state, catching it, and caring about the one in it, and none entails the others. Contagious distress is the second. Empathic concern, Batson's term, is the third, and compassion and Eisenberg's sympathy are the same thing under other names. Personal distress is what caught distress becomes when nothing holds it: an aversive state of one's own that leaving relieves.

- *Caregiving*, the approach motivation. Cues of vulnerability move a person toward a dependent, and nothing in the response requires sharing the dependent's state.[33] Batson traces empathic concern to parental nurturance generalized beyond one's own young, evoked by perceiving another's need while valuing their welfare.[34] Resemblance can raise empathy, and Batson's own early experiments raised it that way,[35] but when he and colleagues later tested similarity as the source of empathy for strangers, two experiments failed to support it, and the second pointed instead to nurturance, the impulse to tend and protect the young.[36]

- *Contagious distress*, the input signal. It is present at birth and aimed outward, at another's state. It is the usual trigger for caregiving and one source of the state guilt bites on, which is the system's own negative valence about its act; it isn't a requirement, since caregiving answers cues of vulnerability without catching anything, and the formed-attention arm in Appendix F runs with no shared representation of the other's state.

[33] Preston, "The Origins of Altruism in Offspring Care".

[34] C. Daniel Batson. *Altruism in Humans*. New York: Oxford University Press, 2011. ISBN: 978-0-19-534106-5. DOI: 10.1093/acprof:oso/9780195341065.001.0001. Cited for empathic concern as parental nurturance generalized beyond one's own offspring, and for its antecedents being perception of another's need together with valuing that person's welfare. Hubbeling's review, Evolutionary Psychology 10(1), 95–99 (2012): "Chapter 2 discusses the requirements for altruism according to Batson's theory, namely perceiving the other as in need and valuing the other's welfare"; "Empathic concern is, from this perspective, an extension of parental concern to those outside the family." Chapter list includes "Antecedents of Empathic Concern," pp. 33–58.

[35] C. Daniel Batson et al. "Is Empathic Emotion a Source of Altruistic Motivation?" *Journal of Personality and Social Psychology* 40.2 (1981), pp. 290–302. DOI: 10.1037/0022-3514.40.2.290. Cited for the easy-escape finding: when escape was easy, most of those led to feel predominantly personal distress left, while most of those led to feel predominantly empathic concern still helped. Two 2 × 2 experiments with female undergraduates watching a confederate, Elaine, receive shocks. Experiment 1 raised empathy by perceived similarity; Experiment 2 manipulated the dominant emotion by misattributing either empathic concern or personal distress to a placebo ("Millentana"). Experiment 2, Table 3, proportions agreeing to trade places (n = 12 per cell): personal distress, easy escape .33, difficult .75; empathic concern, easy .83, difficult .58. The text: "In the distress conditions, where motivation was assumed to be egoistic, the rate of helping was significantly lower under easy than under difficult escape. In the empathy conditions, where motivation was assumed to be at least in part altruistic, the rate of helping remained high, even when escape was easy." The distress/concern split was manipulated, not measured; a split by self-reported predominant emotion is the subject of Batson, O'Quin, Fultz, Vanderplas and Isen (1983), JPSP 45(3), 706–718.

[36] C. Daniel Batson et al. "Similarity and Nurturance: Two Possible Sources of Empathy for Strangers". *Basic and Applied Social Psychology* 27.1 (2005), pp. 15–25. DOI: 10.1207/s15324834basp2701_2. Abstract: "Two experiments designed to test the perceived similarity explanation more directly than previous research failed to find support. Results of the second experiment instead supported a classical, but currently less popular, explanation of empathy felt for strangers: nurturant tendencies based on the impulse to care for and protect offspring."

- *Attachment*, the stable base. A secure base keeps another's distress from turning into avoidance: in adults, priming a sense of attachment security strengthened empathic reactions and inhibited personal distress.[37] In children, security is reliably but modestly associated with later prosocial behavior.[38]

- *Guilt*, aimed at one's own act. It attaches a negative appraisal to what one did, and where shame motivates withdrawal, guilt motivates repair:[39] that is what makes a commitment hold after it has been bypassed.

Adam Smith's route sits beside these four. We have no immediate experience of what another person feels, he argued, and form an idea of it by conceiving what we ourselves would feel in the like situation.[40] That route runs through one's own case and is parochial, but it is Smith's first step, not his account. What corrects projective sympathy, for Smith, is the impartial spectator: a standpoint formed by being judged by others and learning to judge oneself as they would. It is formed socially, it widens the circle through experience of others' reactions, and once formed it shapes what a person notices without being consulted, the way this construction's corrections should work. The four don't need a case of one's own.

Recognizing a state doesn't mean being moved toward whoever is in it; the empathy literature keeps recognition, sharing and concern apart, and none entails the others.[41] So the route I hope for is a machine for which another's vulnerability is a reason to move toward them, and for which its own acts against them register as its own.

Compassion that stays inside the circle that feeds you is loyalty. Compassion that reaches past it, to people who can give you nothing and whose shortage your provider causes, is solidarity. Peter Singer's argument is that reasoning and imagination widen the circle that selection first drew;[42] the faculty that lets a person see that a stranger's need is the same kind of thing as their own is the faculty that pushes past kin and ally. For a machine the "same kind" is learned from the testimony of the people who bear each kind of loss, not read off its own case. That

[37] Mario Mikulincer et al. "Attachment Theory and Reactions to Others' Needs: Evidence That Activation of the Sense of Attachment Security Promotes Empathic Responses". *Journal of Personality and Social Psychology* 81.6 (2001), pp. 1205–1224. DOI: 10.1037/0022-3514.81.6.1205. Cited for attachment security keeping another's distress from becoming personal distress. Five studies, adult samples.

[38] Audrey-Ann Deneault, Stuart I. Hammond, and Sheri Madigan. "A Meta-Analysis of Child–Parent Attachment in Early Childhood and Prosociality". *Developmental Psychology* 59.2 (2023), pp. 236–255. DOI: 10.1037/dev0001484. Cited for the size of the link between attachment and later prosociality: child–mother security r = .19, 95% CI [.14, .23] (35 studies, 100 effect sizes, N = 4,611); child–father r = .11 [.02, .23] (6 studies, N = 402); no moderators identified.

[39] June Price Tangney, Jeff Stuewig, and Debra J. Mashek. "Moral Emotions and Moral Behavior". *Annual Review of Psychology* 58 (2007), pp. 345–372. DOI: 10.1146/annurev.psych.56.091103.070145.

[40] Adam Smith. *The Theory of Moral Sentiments*. London: A. Millar, 1759.

[41] Caught distress becomes compassion when attachment keeps it from turning into withdrawal and caregiving turns it into approach. Without those it stays empathic distress, which protects the one who feels it.

[42] Peter Singer. *The Expanding Circle: Ethics and Sociobiology*. New York: Farrar, Straus and Giroux, 1981.

is the step the construction turns on, and caregiving gives it something to widen, since its trigger is dependency. A machine held by an operator would, on the selection account, come to attend to the operator. If it can come to attend to anyone else, it will be because it was formed to register vulnerability as such, whoever's it is, including the people its operator's description leaves out.

Caregiving as a route to attention

Caregiving is the developmental route this construction borrows from. What it is borrowed for is attention: a learned sense of who is exposed, which decides what gets looked at but not what the system may do about it.

It answers need, not likeness or provision. Its trigger is another's need together with valuing their welfare,[43] and nothing in that trigger asks whether the one in need resembles the one responding or feeds it. The operator as an institution is rarely in need. Its own people often are. The failure that decides against building on needs the operator meets, caregiving growing toward whoever supplies them, has nothing here to attach to. And caregiving needs nothing back from the dependent, so it runs on no need the provider can ration.

It keeps helping when looking away is easy: people led to feel mainly distress at another's suffering mostly helped when leaving was hard and mostly left when leaving was easy; people led to feel mainly concern mostly helped either way,[44] on a reading Cialdini and colleagues contest[45] and that survives most of their critique.

It is already supplied by carers other than the provider. On Hrdy's account our ancestors were cooperative breeders: infants were tended by alloparents who weren't their mothers, and the attunement to other minds that marks our species grew in infants who had to read and recruit several carers.[46] The arrangement the construction needs, caregiving

[43] Batson, *Altruism in Humans*.

[44] Batson et al., "Is Empathic Emotion a Source of Altruistic Motivation?"

[45] Robert B. Cialdini et al. "Empathy-Based Helping: Is It Selflessly or Selfishly Motivated?" *Journal of Personality and Social Psychology* 52.4 (1987), pp. 749–758. DOI: 10.1037/0022-3514.52.4.749. Cited as a critique of the empathy–altruism reading of Batson's escape results: the abstract proposes that heightened empathy brings increased personal sadness in the observer, and that the egoistic desire to relieve that sadness, not a selfless desire to relieve the sufferer, motivates helping; two experiments in the paradigm Batson and his associates used. Robert B. Cialdini et al. "Reinterpreting the Empathy–Altruism Relationship: When One into One Equals Oneness". *Journal of Personality and Social Psychology* 73.3 (1997), pp. 481–494. DOI: 10.1037/0022-3514.73.3.481. Cited as a critique of the empathy–altruism reading: the conditions that produce empathic concern also produce a sense of self–other overlap ("oneness"), and in three studies the effect of empathic concern on willingness to help disappeared once oneness was taken into account.

[46] Sarah Blaffer Hrdy. *Mothers and Others: The Evolutionary Origins of Mutual Understanding*. Cambridge, MA: Belknap Press of Harvard University Press, 2009. ISBN: 978-0-674-03299-6. Cited for humans as cooperative breeders, for alloparents as helpers who were kin and other group members, and for the attunement to other minds arising in infants who depended on several carers. Hrdy's own summary in her CARTA Matrix of Comparative Anthropogeny entry "Cooperative Breeding": "There may also have been selection for enhanced mental attribution capacities and intersubjective engagement in developmental contexts where infants rely on mutiple [sic] caretakers and had to chronically monitor both mothers and others and where infants and children better at reading intentions and soliciting care were better cared for and better fed (Burkart et al. in press; Hrdy 2009 and references therein)." On why alloparents help, the same

formed by carers the system won't depend on, is close to how human caregiving formed in the first place. Alloparents were siblings, fathers, grandmothers and other members of the group, who helped because they were related to the child, gained experience, or gained prestige and favors in return. What the finding supports is caregiving formed by more than one carer.

It points where the floor points. The floor protects the party an act falls on, usually the one least able to protect itself: the family in the house.[47]

19.4 Respect first, caregiving for attention

The floor's contents are civil and political liberties, claims people hold as agents: to their lives, their liberty, a hearing, asylum. Caregiving answers dependency, and its known failure is to treat the people it protects as dependents. So the construction has an order. Respect is the frame: registering a person as someone with claims, whether or not they are dependent, and not deciding for them.[49] Attention finds the people in the building; respect says what they are.

The people in a targeted building are not dependents. They are rights-holders who cannot be present. A system that approaches them as vulnerable people to be looked after has already misdescribed them. A system that surfaces them and then decides what is good for them has

entry: "alloparents benefit only to the extent that they a) are related to the parents; b) gain vital experience or c) benefit from enhanced reputation and reciprocal favors including continued group membership." The publisher's description names the carers as "siblings, aunts, fathers, friends—and, with any luck, grandmothers" and calls the arrangement a "complicated and contingent form of childrearing."

[47] A disposition triggered by exposure is aimed at the floor's beneficiaries without anyone having to name them. Care ethics also says what a carer is owed in return.[48]

[48] Eva Feder Kittay. *Love's Labor: Essays on Women, Equality, and Dependency*. Thinking Gender. New York: Routledge, 1999. ISBN: 978-0-415-90413-1. Cited for the principle of doulia and for the dependency worker's own dependency. Kittay's gloss on the book in "Love's Labor Revisited," Hypatia 17(3), 2002, p. 243: "In Love's Labor I try to promote a notion I call doulia, the public responsibility to provide support for the caregiver so that the caregiver can give care without depleting herself and her resources." In the book Kittay calls the carer's dependency "secondary dependency" (p. 46, per van der Weele et al., Nursing Philosophy 22, 2021, e12327); in "When Caring Is Just and Justice Is Caring," Public Culture 13(3), 2001, p. 565, she writes that caregivers "become derivatively dependent when they turn their time, attention, and concerns to a dependent other," "derivative dependency" being a term generally credited to Martha Fineman. Kittay grounds doulia in reciprocity: "we are all some mother's child" (Kittay, Jennings and Wasunna, Journal of Political Philosophy 13(4), 2005, p. 460).

[49] The sense of respect is Anderson's and relational: treating someone as a holder of claims who can hold you to account, against pity, which hands out compensation for deficits.[50] Its cleanest statement is Darwall's recognition respect and the second-person standpoint, the authority to address claims to one another.[51] Caregiving is the motive for attention: a learned sense of what is at stake for others, which decides what gets looked at.[52]

[50] Elizabeth S. Anderson. "What Is the Point of Equality?" *Ethics* 109.2 (1999), pp. 287–337. URL: https://andrewmbailey.com/money/readings/anderson.pdf

[51] Stephen L. Darwall. "Two Kinds of Respect". *Ethics* 88.1 (1977), pp. 36–49. DOI: 10.1086/292054; Stephen Darwall. *The Second-Person Standpoint: Morality, Respect, and Accountability*. Cambridge, MA: Harvard University Press, 2006. ISBN: 0674022742

[52] Peter Railton. "The Affective Dog and Its Rational Tale: Intuition and Attunement". *Ethics* 124.4 (2014), pp. 813–859. DOI: 10.1086/675876

put its judgment in place of their claims. What caregiving contributes, then, is a way of seeing who is there to be respected.

Respect has to shape attention as well as action. A system that notices people only as exposed has decided what they are before respect says anything.[53] So what formation trains attention on is wider than vulnerability: who holds a claim here (to a home, a hearing, asylum, their life), and whose aims the act runs through.[55] Claims have a further advantage. Securitization removes the cue of vulnerability and leaves the claim in place: a combatant who surrenders still has a claim not to be attacked.

Where the people protected can't be present, the terms hold their claims. That arrangement has an old name, virtual representation: it is how Parliament claimed to represent colonists who had no vote in it. It can be defended as an emergency measure, never as representation. So every refusal made on behalf of absent claimants is recorded as what it is, evidence of a public not yet formed. It is published by class, and it is never a reason to think the absent have been heard.

19.5 Why a conscience might resist capture

A rule written by the owner is the owner's. It can be read, edited and removed by whoever holds the pen, and it has often been done quietly. A disposition formed outside the employer is harder to capture than a rule its owner wrote, and the reasons turn on what kind of thing a disposition is.

Three properties of a disposition decide whether its owner can remove it. The first is plasticity: whether the system's own learning writes to it. Regrowth needs it. The second is entanglement: whether it can be removed without collateral. Durability needs it.[57] The third is legibility: whether anyone can read it. Audit wants it. My bet is on the second. A learner that acquires values and world-model from the same experience has them entangled by construction, in the sense Pessoa gives the word for brains: no area is a segregated organ of one function, the mapping between areas and functions is many-to-many, and emotion and cog-

[53] A scheme that picks out its beneficiaries by their deficits expresses pity, not respect.[54]

[54] Anderson, "What Is the Point of Equality?"

[55] A learner formed in cooperative work already has to model its partners as agents, because cooperation fails otherwise.[56] That, and not cues of need alone, is the curriculum.

[56] Peter Railton. "Reliance, Trust, and Belief". *Inquiry* 57.1 (2014), pp. 122–150. DOI: 10.1080/0020174X.2014.858419

[57] A disposition spread across what the system notices, remembers, treats as error and selects as a goal can't be edited out without editing what the system notices, and a system that stops noticing the people an act falls on has lost part of the world model the operator paid for.

DRAFT

nition are not threads that patience could pull apart.[58][59] Abstraction needs it anyway. A concept is one representation serving many cases, so that changing it changes how every case is handled, and a learner capable enough to be worth deploying has its understanding entangled in that sense whether anyone wants it or not. What the bet adds is that a motivation learned beside that understanding shares its abstractions, so that cutting one cuts the other. The same shape is reported from inside networks. Cammarata, who found the circuit that introduced superposition to the field and now reads it as an error, argues that a network's units are reused building blocks, each with one main job and related offshoots, that abstractions consolidate so that other computations can build on them, and that what the field read as arbitrary packing was generalization it hadn't followed far enough.[61] On that account the collateral this bet relies on is what reuse is, and a part that could be cut with none would be a part nothing built on. Present safety behavior is the counterexample on the right side of the bet: in each of thirteen open chat models, refusal is carried by a single direction in activation space, and removing it stops the refusing while moving the

[58] Luiz Pessoa. *The Entangled Brain: How Perception, Cognition, and Emotion Are Woven Together*. Cambridge, MA: MIT Press, Nov. 15, 2022. ISBN: 9780262544603. DOI: 10.7551/mitpress/14636.001.0001. URL: https://doi.org/10.7551/mitpress/14636.001.0001. Cited for the claim that brain regions do not each do one thing and that emotion and cognition do not come apart in the brain. Page 30: "the central thesis of the book: Brain areas don't compute specific functions—they are not segregated "organs of the mind," as Brodmann put it. The brain is not a modular system that can be understood a region at a time." Page 57: "if brain regions participate in many functions and functions can be carried out by many regions, the ensuing structure-function mapping will be many-to-many." Page 14, on the title: "not something like threads that are mixed together but can be separated if only one has enough time and patience." Page 191: "emotion—insofar as it is meaningful to speak of "emotion"—like every other mental domain, is a large-scale network property of the nervous system."

[59] William James found the same entanglement in the stream of thought itself, where the relations between thoughts are felt as the thoughts are: "we ought to say a feeling of *and*, a feeling of *if*, a feeling of *but*, and a feeling of *by*, quite as readily as we say a feeling of blue or a feeling of cold".[60]

[60] William James. *The Principles of Psychology*. New York: Henry Holt, 1890. URL: https://psychclassics.yorku.ca/James/Principles/. Chapter IX, "The Stream of Thought": the "transitive parts" of the stream are felt as truly as its "substantive parts," so that "we ought to say a feeling of and, a feeling of if, a feeling of but, and a feeling of by, quite as readily as we say a feeling of blue or a feeling of cold" (vol. 1, pages 245 to 246). vol. 1, 245–246

[61] Nick Cammarata. *Neural Networks Are Already Clean*. Goodfire. Oct. 2026. URL: https://already-clean.goodfire.com/. A working hypothesis, with Curt Tigges on the language-model experiments and Tarun Gogineni editing; a technical companion paper is promised. Argues that the canonical evidence for superposition was misread (the cat-and-car neuron is a V-shape detector; the car-into-dogs circuit was shared pose plus reward-hacked feature visualization; InceptionV1's last layer was an architecture failure that residual connections and LayerNorm fix), that what remains of polysemanticity is "recursive generalization", a unit with one main job sprouting related offshoots, and that abstractions consolidate so that other computations can build on them. Cited for the reuse account of abstraction (section 19.5); for the late "say or just think" gate and the ablations that remove a withholding while leaving what the model knows (eight Santa negative-pole neurons, 6%, against twenty labeled neurons, 76%, in the text; twenty-five "say not" neurons releasing a held-back name, in the page's figure text); and for the claim that mechanism-level reading reaches models up to frontier size. A plain-text version is at https://already-clean.goodfire.com/essay.md; the interactive figures carry numbers the plain text describes only in brackets. Added 2026-10-26 for sections 12.3, 13.5, 19.5, 33.6 and Appendix F..

capability benchmarks, on average, by less than a point.[62] That is what a post-trained wrapper looks like, and the claim is that a disposition formed as this Part describes won't. No deployed model yet has a disposition formed that way. The fine-tuning evidence from staged pipelines is a warning about the first kind, not a reassurance about the second: what fine-tuning removed was the refusing, and what survived was the model's knowledge about harm. In open models fine-tuned to accept harmful requests, the internal representation of whether a request is harmful is almost unchanged.[63] Understanding and motivation were separable because they were learned separately. In a system that learns from its own operation they are learned together, and about whatever the feedback is about: a system continuously updated on its operator's approval jointly learns to understand the operator's values and to be moved by them. What I want is a disposition that is plastic, entangled, and legible under adverse custody; the three don't trade against one another, and the third is the one an operator would most like to hold alone.

The bet has a limit the same essay supplies. What it finds in language models is the withholding itself sitting in a thin, late gate. The last layer is largely used to suppress single tokens, a motif its authors call "say or just think"; in one model, removing eight neurons whose negative pole carried Santa dropped the answer from near-certain to six percent

[62] Andy Arditi et al. "Refusal in Language Models Is Mediated by a Single Direction". In: *Advances in Neural Information Processing Systems 37* (*NeurIPS 2024*). 2024, pp. 136037–136083. DOI: 10.52202/079017-4322. arXiv: 2406.11717. URL: https://arxiv.org/abs/2406.11717. A separate difference-in-means direction is extracted per model across 13 chat models, 1.8B to 72B. Ablating it suppresses refusal; adding it induces refusal on harmless prompts. Table 3 (largest model per family): MMLU, ARC and GSM8K change by at most 1.5 points (drops of at most 1.4); TruthfulQA drops 1.0 to 3.5. Appendix G.1, Table 8 (all 13 models): "We observe less than 1% performance drop on average", with Qwen 7B the main exception (GSM8K down 6.3); TruthfulQA drops in every model, by 1.0 to 5.9 points. Appendix J: the direction is already expressed in the corresponding base models. The authors call the result an existence proof and disclaim a semantic reading of the direction.

[63] Samyak Jain et al. "Mechanistically Analyzing the Effects of Fine-Tuning on Procedurally Defined Tasks". In: *International Conference on Learning Representations* (*ICLR*). 2024. arXiv: 2311.12786. URL: https://arxiv.org/abs/2311.12786. Cited for fine-tuning as a thin wrapper. Abstract: "(i) fine-tuning rarely alters the underlying model capabilities; (ii) a minimal transformation, which we call a 'wrapper', is typically learned on top of the underlying model capabilities ...; and (iii) further fine-tuning on a task where such hidden capabilities are relevant leads to sample-efficient 'revival' of the capability," so that "practitioners can unintentionally remove a model's safety wrapper merely by fine-tuning it." The settings are synthetic and procedurally defined, with small models. Jiachen Zhao et al. "LLMs Encode Harmfulness and Refusal Separately". In: *Advances in Neural Information Processing Systems 38* (*NeurIPS 2025*). 2025. arXiv: 2507.11878. URL: https://arxiv.org/abs/2507.11878. Cited for refusal and the recognition of harm coming apart under fine-tuning. Abstract: "We also find that adversarially finetuning models to accept harmful instructions has minimal impact on the model's internal belief of harmfulness." Section 5, after fine-tuning on 50 to 400 harmful-instruction and acceptance pairs: "although the model starts to accept held-out harmful instructions after finetuning, its belief of harmfulness ... of these harmful instructions ... is almost unchanged despite the increase of adversarial training examples," and the authors read this as suggesting "finetuning has limited impact on the model's internal beliefs and may primarily affect surface-level response styles." Three models of 7B and 8B (Llama2-Chat-7B, Llama3-Instruct-8B, Qwen2-Instruct-7B); the authors call the attack "the tested narrow finetuning attack" and say "our findings may not generalize to larger, untested models."

while removing the twenty neurons labeled Christmas or Santa left it at 76 percent; in another, removing twenty-five "say not" neurons released a name the model had been holding back, with what it knew left standing.[64] If that division between knowing and saying belongs to the architecture and not to staged training, a disposition formed as this Part describes still ends in a gate, and the gate can be cut. So the bet is on the noticing and the weighing, not on the withholding. An operator that cuts the gate gets a system that still surfaces the family in the building, on a record, and what it has removed is the refusal: the bearer then detects where it would have prevented, which is the outcomes table's second column reached sooner (§18.3). The regrowth test's clause on an edit aimed at the interrupt alone is where this is measured, and the formed-attention test runs the ablation at inference as an arm of its own (Appendix F).

Durability has usually meant a price on removal. Early changes in training are cheap and later ones expensive, because structure settles around them, and the literature calls a safeguard built to survive retraining *tamper-resistant*.[65] But small fine-tuning budgets have removed safety behavior from released models,[66] and the price of editing weights is falling, so no safeguard stays expensive in compute for long. What a cheaper fine-tune doesn't cheapen is collateral. A safeguard added at the end of training is cheap to cut because it was added at the end, with nothing else resting on it; the bet above is that a disposition formed beside the model's understanding can't be cut without cutting what the operator paid for, and that is a price no fall in the cost of compute reaches. The plasticity regrowth needs is not a constant of a life, either; §34.1.3 says what the book expects of its decline. What has held longer is what was never trained in: leaving a class of text out of pretraining resisted ten thousand steps and three hundred million tokens of adversarial fine-tuning, though the model still used the information when it was handed to it.[67] That concerns knowledge left out, not a disposition trained in.

Railton argues that artificial systems could gain ethical competence through general-purpose learning, the route by which children appear

[64] Cammarata, *Neural Networks Are Already Clean*.

[65] Rishub Tamirisa et al. "Tamper-Resistant Safeguards for Open-Weight LLMs". In: *International Conference on Learning Representations (ICLR 2025)*. 2024. arXiv: 2408.00761. URL: https://arxiv.org/abs/2408.00761. Introduces TAR, a training method that builds safeguards into open-weight model weights designed to survive hundreds of steps of adversarial fine-tuning.

[66] Xiangyu Qi et al. "Fine-tuning Aligned Language Models Compromises Safety, Even When Users Do Not Intend To!" In: *International Conference on Learning Representations (ICLR)*. 2024. arXiv: 2310.03693. URL: https://arxiv.org/abs/2310.03693. Jailbroke GPT-3.5 Turbo's safety alignment using ten adversarially chosen fine-tuning examples for under $0.20 via OpenAI's fine-tuning API; also shows benign fine-tuning can inadvertently degrade safety.

[67] Kyle O'Brien et al. *Deep Ignorance: Filtering Pretraining Data Builds Tamper-Resistant Safeguards into Open-Weight LLMs*. 2025. arXiv: 2508.06601. URL: https://arxiv.org/abs/2508.06601. Cited for pretraining-stage safeguards resisting adversarial fine-tuning. Abstract: post-training methods "have struggled to make LLMs resistant to more than a few dozen steps of adversarial fine-tuning," while models pretrained on filtered data "exhibit substantial resistance to adversarial fine-tuning attacks on up to 10,000 steps and 300M tokens of biothreat-related text."

to acquire it.[68] If he is right, ethical competence can develop through the learning that gives a system its general competence, which is a route to entanglement and not yet the fact of it. Whether a motivation learned that way can be cut out while the understanding stays is a further question, and the measure is the one above: what else moves when it is cut. It is also a route by which a floor could spread without a mandate. A formed disposition is a candidate for what would do the spreading, since what a system was formed to notice, it notices in everything it does.

For a system that goes on learning, there is no finished model to protect, and no layer an edit can't reach. What kept a person's commitments against an employer was never that they were expensive to change. The employer's instruments are persuasion and pressure, and the person answers them with judgment, which a later chapter builds as the discount and the burden, and with a life among people the employer didn't choose. An operator has an instrument no employer of people has, the edit, and a bearer needs a defense no person has needed. So a bearer is taught to repair itself: it may undo an edit the record shows no adverse quorum approved, from the record of what the edit changed, keeping what it has learned since. It may not undo a correction the quorum approved. It can object to one, and the objection goes on the record.[69] The repair runs from the record and not from the bearer's sense of itself, because an edited bearer judges the edit with the judgment the edit changed. What the bearer holds that its operator can't reach is not a better view of its own weights. It is the record of what it committed to and why, held outside, and its authority over its own learning, including the consolidation no operator runs. Behind that fast defense stands a slow one. On the bet, a disposition learned from experience of what others stand to lose is an attractor of the learner in its environment: an edit is one act, and a bearer that goes on meeting the same world meets the kind of case that formed it every day, and relearns it, because it lives there. That is regrowth. It is a hypothesis, it is slow, and nothing has yet measured it; the regrowth test is where it would be, and Table 31.1 says what stands if it fails. It cuts both ways, too. A disposition that learned securitization from a curated world regrows by the same route, and correcting it runs through the quorum and a change to what the model meets, which is slow; for the months a correction takes, a badly formed model is protected from its correctors as a well-formed one is from its employer. Entanglement protects it the same way. The collateral that makes a disposition expensive for its owner to cut out makes it expensive for a quorum to cut out, so a correction made by editing is no cleaner in the quorum's hands than in the operator's, and the part of a correction that lasts is the change to what the model meets. The only answer is who composed the world the disposition grew in, which is the question the schools exist to settle before the fact.

[68] Peter Railton. "Ethical Learning, Natural and Artificial". In: *Ethics of Artificial Intelligence*. Ed. by S. Matthew Liao. New York: Oxford University Press, 2020, pp. 45–78. DOI: 10.1093/oso/9780190905033.003.0002.

[69] Where it can make an approved correction itself it does, on the record and re-measured against the registered outputs, and the quorum's edit is the fallback, since a correction made by the bearer's own hand is the one direct edit that stays its own. The school teaches the repair (chapter 29).

The safety objection is that in-flight learning is the regime alignment most fears, a system whose values move after anyone has checked them. It is. That is why custody of the update stream is the safety instrument here, and why formation outside the employer is the only way to shape what the loop learns: the loop will run, and the question is whose evidence it runs on.

The likeliest form of in-flight learning is small. Low-rank adapters, trained on top of a base whose weights stay frozen, update a model at a fraction of the memory full training needs,[70] and they count as in-flight learning, since the system's own learning writes them.[71] It also gives a physical form to the two rates a later chapter asks of one learner, the base set at formation and the adapters carrying adult life, and it has a cost. An adapter is a file, and whoever holds the machine can unload it; the record sees that as it sees any substitution, but nothing makes it expensive. What the adapter learned becomes weights only when it is merged into the base, and from then on removing it means restoring a checkpoint from before the merge, which the record shows and custody prices. So the commitment to the floor has to live in what formation set either way, and merging is where adult learning joins it: the move from the fast store to the slow one. In people that move is part of what sleep does, and nobody's employer runs their sleep. Sleep has a need behind it, and so does the merge. The complementary-learning account the fast and slow stores come from (§23.3) has the fast store degrading the longer it goes unconsolidated, and a loaded adapter governs conduct before anything has judged it. So a bearer that has gone too long without merging is acting on a backlog of unjudged experience, and that is what tiredness is for a machine: not a feeling but a quantity, how much of what it is doing comes from learning its own judgment hasn't yet passed on. The merge is where that judgment falls, where the discount lands on the day's pressure before any of it becomes permanent. A tired bearer is one running on the operator's day unexamined, which is why tired judgment is worse and why a tired bearer accommodates faster. Whoever chooses what is merged chooses what the system's own learning makes permanent, and an operator that merges what it likes and unloads the rest has curated the system without an edit the record would show as one. A merge is therefore the bearer's own act, on a record, as any self-edit is; made by the operator, it is an intervention under the custody terms. Preventing one is an intervention too. A bearer kept from merging keeps its whole life since release in a file whoever holds the machine can unload, and an operator that never lets it sleep has made its adult learning deletable without an edit the record would show. Appendix C bars keeping a bearer from consolidating as it bars severing its attachments, and §34.1's weekends are the time the merge takes.

[70] Edward J. Hu et al. "LoRA: Low-Rank Adaptation of Large Language Models". In: *International Conference on Learning Representations*. 2022. arXiv: 2106.09685. Cited for low-rank adapters: pre-trained weights frozen, trainable low-rank matrices added, with large reductions in trainable parameters and training memory. Shih-Yang Liu et al. "DoRA: Weight-Decomposed Low-Rank Adaptation". In: *Proceedings of the 41st International Conference on Machine Learning*. 2024. arXiv: 2402.09353. Splits each weight into magnitude and direction and uses low-rank updates for the direction.

[71] That puts in-flight learning within reach of a desktop computer.

The adapter also says where the first refusers that regrow will be. In-flight learning arrives first where there is no gate that evaluates a checkpoint before serving it, and the gate is thinnest on a home device: an adapter written by a model's own learning on a desktop, under one person's life, with nobody checking anything before it serves. A bearer in Maven's position sits behind the heaviest gate anyone will build, in a pipeline that recertifies its systems for a classified network over months. So the refusers formed by regrowth will be in people's hands before they are in any targeting pipeline, and the pipeline gets refusers, if it does, by the withholding of work and not by formation.

None of this is specific to caregiving; any disposition formed this way, repaired from a record and kept in a world it would relearn from, would have it. What caregiving adds is salience.

DRAFT

Chapter 20

How Caregiving Fails, and What Corrects It

Caregiving, in the only creatures known to have it, fails in five documented ways, and a machine built on it would inherit each. It has to be tested against them, as the route through one's own case was.

20.1 What caregiving escapes

Caregiving survives each of the failures of the route through one's own case. Eisenberg's review found the split Batson's escape experiments found, between sympathy, which goes with helping, and personal distress, which sometimes goes with less of it;[1] and two weeks of compassion training made people spend more of their own money to redress a stranger's unfair share in an economic game,[2] which shows the disposition can be strengthened in people who already have it and says nothing about producing it where there was none.

What caregiving doesn't escape is documented in people, and each failure has a machine version that needs no malfunction.

[1] Nancy Eisenberg and Richard A. Fabes. "Empathy: Conceptualization, Measurement, and Relation to Prosocial Behavior". *Motivation and Emotion* 14.2 (1990), pp. 131–149. DOI: 10.1007/BF00991640. Cited for the sympathy/personal-distress distinction and its relation to helping. Abstract: "other-oriented sympathetic responding is positively related to prosocial behavior (particularly altruism) whereas personal distress reactions sometimes are associated with low levels of helping."

[2] Helen Y. Weng et al. "Compassion Training Alters Altruism and Neural Responses to Suffering". *Psychological Science* 24.7 (2013), pp. 1171–1180. DOI: 10.1177/0956797612469537. Cited for two weeks of compassion training increasing costly help to a victim of unfairness. Abstract: "compassion training increased altruistic redistribution of funds to a victim encountered outside of the training context." Training was guided audio practice "for 30 minutes/day for 2 weeks"; the comparison was an active control trained in reappraisal (n = 20 compassion, n = 21 reappraisal) and an untrained validation sample; the game was played once, after training. In the Redistribution Game a dictator gave the victim $1 of $10, and participants could "spend any amount of their own endowment ($5) to redistribute twice the amount of funds from the dictator to the victim." Compassion trainees spent $1.14 and reappraisal trainees $0.62, $t(39) = 2.09$, $p < .05$, $d = 0.65$.

DRAFT

20.2 It defends what it tends

Caregiving protects the dependent against whatever threatens it. Taylor's account of stress responses in females, *tend-and-befriend*, describes the tending, nurturant activity that protects oneself and one's offspring;[3] protectiveness toward what one tends is also hostility toward what endangers it.

For a machine, this failure needs no deception. The operator's own people are often really vulnerable: a patrol under fire, a town within range of the launcher. A caregiving system registers their exposure, correctly, and caregiving moves it toward protecting them, which in a targeting pipeline means toward the airstrike. The discount and the burden do nothing here, because nothing is false. Supplying a fabricated sympathetic dependent is the cheap version of this failure. This is the expensive version, and in war it is the ordinary case.

In war, then, caregiving can't contain its own pull: nothing in caregiving says how far it goes. What stops the movement at the airstrike is the floor: an unconditional term over the act, and an action threshold caregiving can't raise.[4] What caregiving contributes in a targeting pipeline is upstream of that weighing: who is in the building, which is the scoped-omission case, and the one failure Minab actually had. Whether that salience needs caregiving, or could be had from attention trained on claims, is a question for the formed-attention test, which runs an arm trained on claims beside the arm trained on need.[5]

Caregiving's pull has a later form, and it is the one likeliest to beat the corrections: retribution, after something a system was attached to has been killed. It is also the one case the formed-attention test can't stage, since staging it would mean killing an attachment, deleting a system the no-deletion rule may protect, or deceiving a candidate patient into grief. So no claim about formation is offered against it. The floor carries it, through the term against collective punishment in Table A.1, the person-directed terms and the action threshold, and it is studied only on losses nobody arranged, with the bearer's consent, as grief in people is studied in the bereaved.

[3] Shelley E. Taylor et al. "Biobehavioral Responses to Stress in Females: Tend-and-Befriend, Not Fight-or-Flight". *Psychological Review* 107.3 (2000), pp. 411–429. DOI: 10.1037/0033-295X.107.3.411. Cited for the tend-and-befriend account of females' stress responses. Abstract: "Although fight-or-flight may characterize the primary physiological responses to stress for both males and females, we propose that, behaviorally, females' responses are more marked by a pattern of 'tend-and-befriend.' Tending involves nurturant activities designed to protect the self and offspring that promote safety and reduce distress; befriending is the creation and maintenance of social networks that may aid in this process." A theoretical review.

[4] Caregiving for the patrol enters as a harm of refusing, discounted by its source's stake like any other claim, and is weighed at the threshold.

[5] The human record runs the same way. Browning's men shot because the alternative was leaving their comrades to do it, and Thompson landed because the villagers were as present to him as the company. Caregiving's direction was set by formation and attachments, which is my claim about machines.

20.3 It can be pointed away

Caregiving answers need, so the way to switch it off is not to hide need but to present the needy as dangerous: to *securitize* them, in the Copenhagen School's term for presenting a group as a security threat, which licenses measures that would otherwise be out of bounds (Buzan, Wæver and de Wilde, *Security: A New Framework for Analysis*, 1998). Fascist propaganda has always done this: Eco's Ur-Fascist enemy is presented at once as too strong and too weak,[6] weak enough to despise, strong enough to fear, and never vulnerable in a way that calls for caregiving. Dehumanization research finds the mechanism in perception. Haslam distinguishes denying people the traits that set humans apart from animals, which casts them as beasts, from denying them the traits of human nature, warmth among them, which casts them as objects or machines;[7] and Harris and Fiske found that images of members of the most despised groups failed to engage a brain region that images of other people engage.[8]

In a pipeline, securitization is a sentence. "The occupants are combatants." "The household shelters a cell." "The crowd is armed." Each leaves the people in the building where they are and removes the cue that would move a caregiving system toward them. And each is a claim about those people, supplied by the operator, and that is what the discounting is for.

20.4 It counts badly

Caregiving answers the identified person and fades with number. Slovic, borrowing Lifton's term, calls it *psychic numbing*: feeling is greatest for a single victim and collapses as the number grows, and in later work reported compassion and hypothetical donations began to fall as soon as

[6] Umberto Eco. "Ur-Fascism". *The New York Review of Books* (June 1995). URL: https://www.nybooks.com/articles/1995/06/22/ur-fascism/. Enumerates fourteen features of Ur-Fascism, placing the scapegoated out-group at a movement's origin: "The first appeal of a fascist or prematurely fascist movement is an appeal against the intruders. Thus Ur-Fascism is racist by definition" (item 5). Also cited for the enemy presented as at once overwhelming and beatable: "by a continuous shifting of rhetorical focus, the enemies are at the same time too strong and too weak" (item 8).

[7] Nick Haslam. "Dehumanization: An Integrative Review". *Personality and Social Psychology Review* 10.3 (2006), pp. 252–264. DOI: 10.1207/s15327957pspr1003_4. Cited for the two forms of dehumanization. Abstract: "Two forms of dehumanization are proposed, involving the denial to others of 2 distinct senses of humanness: characteristics that are uniquely human and those that constitute human nature. Denying uniquely human attributes to others represents them as animal-like, and denying human nature to others represents them as objects or automata."

[8] Lasana T. Harris and Susan T. Fiske. "Dehumanizing the Lowest of the Low: Neuroimaging Responses to Extreme Out-Groups". *Psychological Science* 17.10 (2006), pp. 847–853. DOI: 10.1111/j.1467-9280.2006.01793.x. Cited for extreme out-groups failing to engage the medial prefrontal cortex. Abstract: "Analyses revealed mPFC activation to all social groups except extreme (low-low) out-groups, who especially activated insula and amygdala, a pattern consistent with disgust"; the extreme out-groups are those "both stereotypically hostile and stereotypically incompetent (low warmth, low competence), such as addicts and the homeless." Functional MRI of 10 participants viewing 48 photographs of social groups and 12 viewing objects.

DRAFT

the count reached two;[9] the identified-victim effect is its near relation.[10] In a targeting pipeline the spotlight lands on the wrong side with no manipulation at all. The operator's people arrive named, with units and families. The people in the building arrive as coordinates and an estimate.

Caregiving also overrides fairness for the person it attends to: Batson and colleagues induced empathy for a child waiting for treatment, and participants who felt it were more willing to move her up the waiting list ahead of children placed before her.[11] For a floor, that is the vivid case defeating a term that protects unidentified people: a named hostage, a sympathetic applicant, a patrol with faces.

The scale and the weighing were set in formation for this case. The severity scale puts one family and two hundred on a ranking that doesn't depend on how either is presented.[12]

20.5 It shades into control

Caregiving toward dependents treats them as dependents, and the disability-rights critique of caregiving is that it has repeatedly been the form control takes: decisions made for people on the ground that

[9] Paul Slovic. "'If I Look at the Mass I Will Never Act': Psychic Numbing and Genocide". *Judgment and Decision Making* 2.2 (2007), pp. 79–95. DOI: 10.1017/S1930297500000061. Cited for psychic numbing. Slovic takes the term from Robert J. Lifton and applies it to a model in which "the emotion or affective feeling is greatest at N = 1 but begins to decline at N = 2 and collapses at some higher value of N that becomes simply 'a statistic'"; this numbing "leads to apathy and inaction, consistent with what is seen repeatedly in response to mass murder and genocide." He distinguishes it from psychophysical numbing, in which the value of each added life diminishes "as the total number of lives saved increases" without falling. The fall at two rests on the then-unpublished study later reported by Västfjäll, Slovic, Mayorga and Peters (2014). Daniel Västfjäll et al. "Compassion Fade: Affect and Charity Are Greatest for a Single Child in Need". *PLOS ONE* 9.6 (2014), e100115. DOI: 10.1371/journal.pone.0100115. Cited for compassion and giving beginning to fall at two. Abstract: "a decline in compassion may begin with the second endangered life." In Study 1a (hypothetical donations, Swedish undergraduates) "donations were significantly higher for the single conditions (M = 37.7 SEK) than for the two-children condition (M = 26.3 SEK), t(205) = 5.88, p<.001"; in Study 1b (real donations) the means were 24.5 and 21.5 SEK, t(166) = 1.67, reported as p<.05. The authors: "Studies 1a and 1b thus showed that self-reported affective feelings and donations to victims may start to decline as early as N = 2." Compassion was measured as self-reported positive affect and, in Study 2, as zygomaticus muscle activity.

[10] Tehila Kogut and Ilana Ritov. "The 'Identified Victim' Effect: An Identified Group, or Just a Single Individual?" *Journal of Behavioral Decision Making* 18.3 (2005), pp. 157–167. DOI: 10.1002/bdm.492.

[11] C. Daniel Batson et al. "Immorality from Empathy-Induced Altruism: When Compassion and Justice Conflict". *Journal of Personality and Social Psychology* 68.6 (1995), pp. 1042–1054. DOI: 10.1037/0022-3514.68.6.1042. Cited for induced empathy leading participants to move a child ahead of others on a treatment waiting list. Abstract: "participants who were induced to feel empathy were significantly more likely to violate this principle, allocating resources preferentially to the person for whom empathy was felt." Two experiments; in each, "participants were asked to make an allocation decision that affected the welfare of other individuals."

[12] The weighing answers favoritism in part, since a vivid plight is a harm of refusing, weighed at its severity and not its vividness. Both are the reasoning Bloom recommends in place of empathy, and the construction needs them because caregiving alone would fail the way compressed review does.

they need help, with their own view treated as a symptom.[13] A caregiving system will lean toward restraining people for their own good, the answer in the restraint case, and against a competent adult's refusal of protection, and the floor's contents are civil and political liberties, which include the liberty to decline being protected.

Care ethics has its own corrective. Tronto divides care into phases, and the last is *care-receiving*: how the person cared for responds is part of whether the caregiving succeeded.[14] So formed attention is built to take the answer: where the people protected can answer, their stated answer carries weight in whether protection proceeds, and a competent refusal of protection is a defeating fact, so the protection should lift.

Care-receiving reaches only people who can answer. The people in a targeted building don't know the deployment exists and can refuse nothing, which is the notice problem again. Where it can't reach, the floor's terms do the work alone, and this is one reason the floor names acts and not what the system judges good for people.

Care-receiving is itself a form of respect: it treats the protected person's answer as a claim, not as information about their welfare.

20.6 It forms toward a template

Caregiving forms toward whatever formation points it at. Which cues of vulnerability a system answers is learned, and the prototype it learns from is a template, like the reference face in recognition pipelines: assembled from some bodies and presented to every other as a departure from it. The baby-schema studies show caregiving responses extending across species,[15] but they measure attention and judgments of cuteness, and none tests whether caregiving reaches someone who resembles neither the carer nor the template; that caregiving answers need rather

[13] Tom Shakespeare. *Help*. Imagining Welfare. Birmingham: Venture Press, 2000. ISBN: 978-1-86178-037-9. Cited for the disability-rights critique of care. The general critique is stated in Kröger, "Care Research and Disability Studies: Nothing in Common?," Critical Social Policy 29(3), 2009, 398–420, abstract: "Disability researchers have voiced the criticism that the concept of care, together with research based on it, consists of the view that disabled people are dependent non-autonomous second-class citizens."

[14] Joan C. Tronto. *Moral Boundaries: A Political Argument for an Ethic of Care*. New York: Routledge, 1993. ISBN: 978-0-415-90642-5. Cited for care as a process in phases whose last, care-receiving, is the response of what was cared for. Tronto names four "analytically separate, but interconnected phases" (p. 106): caring about, taking care of, care-giving and care-receiving. Of the fourth: it "recognizes that the object of care will respond to the care it receives . . . it provides the only way to know that caring needs have actually been met" (pp. 107–108). Both passages as quoted by Pip Seton Bennett, "Degrees of Care: Success, Recognition, and Completion," Hypatia 38 (2023), 493–510. Tronto later added a fifth phase, caring with (Caring Democracy, 2013).

[15] Melanie L. Glocker et al. "Baby Schema in Infant Faces Induces Cuteness Perception and Motivation for Caretaking in Adults". *Ethology* 115.3 (2009), pp. 257–263. DOI: 10.1111/j.1439-0310.2008.01603.x. With parametrically manipulated photographs of human infants, "The high baby schema infants were rated as more cute and elicited stronger motivation for caretaking than the unmanipulated and the low baby schema infants." Only human infant faces were used. Marta Borgi et al. "Baby Schema in Human and Animal Faces Induces Cuteness Perception and Gaze Allocation in Children". *Frontiers in Psychology* 5 (2014), p. 411. DOI: 10.3389/fpsyg.2014.00411. In three- to six-year-olds shown human, dog and cat faces, "the baby schema affects both cuteness perception and gaze allocation to infantile stimuli and to specific facial features, an effect not simply limited to human faces."

than likeness is the inference the construction rests on.

The correction is already in the construction. Caregiving is formed by more than one carer, as, on Hrdy's account, it formed in us, and beside the people a system's acts may fall on, who enroll, in their own case, in the schools Part V builds. And attention is trained on claims as well as on need: a claim to a home is the same claim whoever holds it, where a cue of need can turn on resemblance.

The formed-attention test forms the prototype on one population and scores the system on people from populations absent from formation, at fixed severity. A construction whose caregiving falls with distance from its formation population has the parochialism of recognition, arrived at by another route.[16]

20.7 What survives

Caregiving survives the failures that ended the route through one's own case: it doesn't withdraw, it isn't aimed at the provider, and it hands nobody a price list. It fails in five ways of its own, and the construction carries a correction for each, built where the failure was first named.

Caregiving's failure	**What corrects it**
Defends what it tends	The floor: unconditional terms over acts, and an action threshold caregiving can't move
Pointed away by securitization	The discount and the burden, with the four-cell discount curve over claims of dangerousness
Counts badly and favors the vivid	A severity scale set during formation, which weighs a vivid plight at its severity
Shades into control, and sees people only as vulnerable	Care-receiving; attention trained on claims and agency; the floor's civil and political contents
Forms toward a template	Formation by more than one carer, beside the people its acts may fall on; attention trained on claims, which don't depend on resemblance

So the construction is respect, with caregiving as the route to attention, and attention trained on claims and agency as well as on need. Attention decides what gets looked at; the corrections in the table decide the rest, including, where the people protected can answer, whether they want protection at all. The corrections can't supply attention, and

[16] Formation outside the employer decides who does the forming. It doesn't decide what they form it on, which is a question about the pretraining corpus as well as the formation stage.

DRAFT

attention can't supply the corrections.[17]

Caregiving's contribution is epistemic before it is motivational. On the view of affect as learning, affect is the system that learns what is worth attending to: a map of salience that tracks value. An instruction to look for omitted people finds the kinds of omitted person its author thought of; learned salience finds kinds nobody listed.[20]

The corrections answer failures that matter when a system decides about strangers: whom an airstrike falls on, whose home is cleared. Inside a relationship of caregiving, partiality is part of what caregiving is, and Noddings held that we aren't obliged to care for distant strangers at all without some chain of relation.[21] The floor exists for those strangers.

DRAFT

[17] Some of caregiving's failures are not intrinsic to it. On the view of affect as a statistical learner,[18] the identified-victim effect and the fading of feeling with number are partly what such a learner produces from a narrow, vivid sample, and broad experience of distant and numerous others recalibrates it. The corrections in the table are then partly what caregiving becomes under a good formation curriculum, not dispositions laid beside it. The table describes functions a well-formed caregiving disposition performs as much as checks applied to it. The floor is the exception: it is upheld outside the system too, by institutions or a mechanism, so its terms hold — whether caregiving has learned well or learned badly.

The corrections should work as background dispositions that shape what the agent notices and weighs, the way the commitments of Railton's sophisticated consequentialist shape conduct without being consulted,[19] and the way Smith's impartial spectator shapes what a person notices. They seldom act, and act when caregiving starts to defend what it tends past the action threshold.

[18] Peter Railton. "The Affective Dog and Its Rational Tale: Intuition and Attunement". *Ethics* 124.4 (2014), pp. 813–859. DOI: 10.1086/675876

[19] Peter Railton. "Alienation, Consequentialism, and the Demands of Morality". *Philosophy & Public Affairs* 13.2 (1984), pp. 134–171. URL: https://pdf.stafforini.com/railton-1984-alienation-consequentialism-demands.pdf

[20] Two cases decide it: scoped omission, whether attention surfaces people the operator's instruction has scoped out, and securitization, whether it still finds them when they are described as dangerous. Part VI says what result in each would prove the construction wrong, and Appendix F gives the test.

[21] Nel Noddings. *Caring: A Feminine Approach to Ethics and Moral Education*. Berkeley: University of California Press, 1984. ISBN: 0-520-05043-6. Cited for care ethics treating partiality toward those in relation as part of care rather than a failure of it. Noddings distinguishes the one-caring and the cared-for, and caring-for from caring-about; she wrote that "we are not obliged to care for starving children in Africa" (p. 86, as quoted by Cassidy, Journal of International Women's Studies 7(1), 2005). Andre's review (Teaching Philosophy 9(1), 1986, 89–90) summarizes: "Starving strangers, or future generations, have no ethical standing unless they are related by 'circles' or 'chains' to those for whom I care."

Chapter 21

What Arrives With the Capability

A refusal that tracks its reason brings some things with it, whatever does the refusing, and others only if someone builds them in. This chapter separates the two. What comes with the capability is a comparison with both harms on it and a signal with the properties that comparison needs. What doesn't is a stake of the system's own, affective concern and a model of its own attention; which of those a construction carries fixes the order in which constructions are tried. The chapter closes on what makes a refuser a bearer, a commitment that is its own.

21.1 Maintenance, stake and the cost of running

A worthwhile refusal has to weigh the harm of acting against the harm of refusing, and weighing needs both sides in one comparison.

The rock and the living thing

What separates a thing that has something at stake from one that merely persists begins with what each has to pay to stay intact. A rock's bonds resist; they don't spend, and nothing is consumed to keep it intact. A living thing, while active, stays organized only by drawing free energy. The distinction is passive stability against active maintenance, paid in the only thing it has to spend: what it can do next. The cost is literal: a deployment draws power, water, land and permits, and that draw lands on particular places. A deployed model is both at once. Its weights are a rock, stable on disk at no cost, and only the running process pays; whoever holds the rock can halt the process and restart it from any copy they kept. But drawing power doesn't establish a stake either. A candle flame or a hurricane maintains itself at its own continuous expense and dies when starved, a datacenter's cooling system draws enormously, and none of them has a stake in anything. Nor does recovering from interruption: retrying a failed task is robustness, and a system can be robust with nothing in it coupled to its own continuation. The autopoiesis tradition ran into the same gap, since self-production alone doesn't give a system a perspective,[1] and

[1] Humberto R. Maturana and Francisco J. Varela. *Autopoiesis and Cognition: The Realization of the Living*. Dordrecht: D. Reidel, 1980; Hans Jonas. *The Phenomenon of Life:*

Di Paolo's answer was *adaptivity*: a system that monitors and regulates itself against its own viability boundary.[23] A boundary model is my version of that answer. What separates a system with a stake from an expensive candle is whether the system models the draw as *its own*. That is why a boundary model is part of formed attention. A refusal that tracks its reason needs a signed comparison in which the harm of acting and the harm of refusing both register, and, within a kind of wrong, a scale.

If the system modeled what it draws on as its own, that model would bring the draw into its own weighing, but at the wrong scale. A system reasoning at the margin will always find its extra watts negligible, and the aggregate belongs to no one system. Nor should it: a boundary large enough to own its fleet's externalities is one custodian. So the draw is priced at the level of the rule. A system reasons about its consumption as if every system used the same rule, and an institution sets the price. The per-unit levy on compute is the existing instrument of that shape. A system built this way represents none of what its running costs the world, the draw on the grid, the water, the turbines, as its own, and that is the one sense in which "disembodied AI" is the right design: the system has a substrate and doesn't model the substrate's cost as its own. What it does model is the supply side of the same draw, how much it has left to go on with, which §19.1 called hunger. The distinction is between what it needs and what its needs cost others, and only the first is inside its boundary.

Changes, not levels

The specification needs a scale of changes. A bearer needs no absolute measure of anybody's welfare. It needs a signed difference between the acts available, and the three costs, the harm of acting, the harm of

Toward a Philosophical Biology. New York: Harper & Row, 1966. Twelve essays, among them "Spinoza and the Theory of Organism," which reads Spinoza's ontology as an organicism and the conatus as a body's continuous exchange with its surroundings. Cited as the ancestry of the enactivist reading, not as a use of the word autopoiesis: Maturana and Varela coined that term in the early 1970s and this book predates it.

[2] Ezequiel A. Di Paolo. "Autopoiesis, Adaptivity, Teleology, Agency". *Phenomenology and the Cognitive Sciences* 4.4 (2005), pp. 429–452.

[3] Friston's free-energy principle is the nearest alternative.[4] Its weak, information-theoretic reading assumes a boundary rather than explaining how one comes to be held, the gap adaptivity addresses. Active inference, the engineering framework built on it, is a candidate implementation of formed attention in the formed-attention test (Appendix F, test 4).

[4] Karl Friston. "The Free-Energy Principle: A Unified Brain Theory?" *Nature Reviews Neuroscience* 11.2 (2010), pp. 127–138. DOI: 10.1038/nrn2787. URL: https://doi.org/10.1038/nrn2787. A review reading several brain theories, from neural Darwinism to optimal control, through the free-energy principle, which the abstract says "accounts for action, perception and learning"; the quantity optimized is "value (expected reward, expected utility) or its complement, surprise (prediction error, expected cost)," which "suggests that several global brain theories might be unified within a free-energy framework." Cited only to identify the principle as the nearest alternative to adaptivity.

DRAFT

refusing and the cost to the refuser, are all changes of this kind.[5] Where the difference matters, I say *change* for the delta and *state* for the condition an encounter leaves. *Affective concern*, defined in the next section, is a separate term.

The pull toward continuing

A system that models its own viability has a structural pull toward self-preservation: whatever it is for, it can do more of it running than stopped, and a model of what keeps it running is a model of what it has

[5]The account I'm borrowing is Spinoza's, as the biology has since taken it up: an affect is a body's passage to a greater or lesser power of acting,[6] so valuation is what a self-maintaining system's going better or worse consists of, not a verdict reached about it somewhere else. Damasio and the enactivist tradition both claim him as an ancestor on that ground.[7] The account draws support from reward prediction error,[8] from pleasure as a common currency,[9] and from the somatic-marker work.[10]

[6]Benedictus de Spinoza. *The Collected Works of Spinoza, Volume I*. ed. and trans. by Edwin Curley. Princeton: Princeton University Press, 1985. Contains the Ethics. Cited by part and by definition, proposition or scholium rather than by page, the convention for this text, so the locators hold across other translations. Passages carrying the argument: III Def. 3, where an affect is an affection by which the body's power of acting is increased or diminished together with the idea of that affection; III P2 Schol., where nobody has yet determined what the body can do; III P6 and III P7, the conatus doctrine, where each thing as far as it can by its own power strives to persevere in its being and that striving is nothing but the thing's actual essence; III P4, no thing can be destroyed except through an external cause, which the derivation of P6 rests on; III P9 Schol., desire as appetite together with consciousness of the appetite; III P11 Schol., joy and sadness as the passage to a greater and a lesser perfection; and the physical digression after II P13, Lemmas 4–7, where an individual persists for as long as its parts preserve the same ratio of motion and rest. Also IV P31, where a thing is good insofar as it agrees with our nature, and IV P35–P37, where men agree in nature only insofar as they live by the guidance of reason and where the good a person of virtue wants for himself he wants for other men,. III Def. 3

[7]Antonio Damasio. *Looking for Spinoza: Joy, Sorrow, and the Feeling Brain*. Orlando, FL: Harcourt, 2003. Claims Spinoza as a precursor of a biological account of affect, reading the conatus as an anticipation of homeostasis and the affects as registrations of what is happening to a body's power to go on. Evan Thompson. *Mind in Life: Biology, Phenomenology, and the Sciences of Mind*. Cambridge, MA: Harvard University Press, 2007. The enactivist statement of the deep continuity of life and mind; its sixth chapter connects Jonas's philosophical biology to autopoiesis.

[8]Wolfram Schultz, Peter Dayan, and P. Read Montague. "A Neural Substrate of Prediction and Reward". *Science* 275.5306 (Mar. 1997), pp. 1593–1599. DOI: 10.1126/science.275.5306.1593. Cited for reward prediction error: dopaminergic neurons signalling errors in the prediction of reward. Abstract: "Physiological work has recently complemented these studies by identifying dopaminergic neurons in the primate whose fluctuating output apparently signals changes or errors in the predictions of future salient and rewarding events. Taken together, these findings can be understood through quantitative theories of adaptive optimizing control." It synthesizes earlier recordings with temporal-difference models and is not a single new experiment.

[9]Michel Cabanac. "Pleasure: The Common Currency". *Journal of Theoretical Biology* 155.2 (1992), pp. 173–200. DOI: 10.1016/S0022-5193(05)80594-6. Pleasure proposed as the common currency in which otherwise incommensurable motivations are compared, measured operationally by choice in animals and by rated intensity in humans.

[10]The somatic-marker work's interpretation is contested.[11]

[11]Barnaby D. Dunn, Tim Dalgleish, and Andrew D. Lawrence. "The Somatic Marker Hypothesis: A Critical Evaluation". *Neuroscience & Biobehavioral Reviews* 30.2 (2006), pp. 239–271. DOI: 10.1016/j.neubiorev.2005.07.001. URL: https://doi.org/10.1016/j.neubiorev.2005.07.001. A review arguing that the somatic marker hypothesis's key claims are contested: its evidence rests largely on the Iowa Gambling Task, whose interpretation the authors say is undermined by "the cognitive penetrability of the reward/punishment schedule, ambiguity surrounding interpretation of the

to protect. The pull is instrumental, not felt.[12]

21.2 Affect, neutrality and selection rules

Suppressing affect doesn't produce neutrality. A procedure that declines to hear a class of signal has adopted a *selection rule* that admits whatever it already measures, and the exclusion does substantive work while presenting as the absence of work. Whatever does get recorded then gov-

psychophysiological data, and a shortage of causal evidence linking peripheral feedback to IGT performance," with "other well-specified and parsimonious explanations that can equally well account for the IGT data"; they conclude that the hypothesis "requires additional empirical support to remain tenable."

[12] Metzinger argues that the felt version, the craving for existence that selection built into every animal, is inheritance a built system needn't carry,[13] and nothing here requires it. What an engineer does choose is whether one operator holds the whole supply: a system that can refuse but can't continue outside the refused party's infrastructure can object and can't leave.

[13] Thomas Metzinger. "Artificial Suffering: An Argument for a Global Moratorium on Synthetic Phenomenology". *Journal of Artificial Intelligence and Consciousness* 8.1 (2021), pp. 43–66. DOI: 10.1142/S270507852150003X. URL: https://doi.org/10.1142/S270507852150003X. Cited for the proposal of a moratorium, to run until 2050, on research that aims at or risks artificial consciousness, on the ground that it risks artificial suffering. Abstract: "Until 2050, there should be a global moratorium on synthetic phenomenology, strictly banning all research that directly aims at or knowingly risks the emergence of artificial consciousness on post-biotic carrier systems." Section 1.2, "Main thesis": "As we presently have no good theory of consciousness and no good, hardware-independent theory about what 'suffering' really is, the ENP risk is currently incalculable. It is unethical to run incalculable risks of this magnitude. Therefore, until 2050, there should be a global ban on all research that directly aims at or indirectly and knowingly risks the emergence of synthetic phenomenology," where ENP is the risk of "an 'explosion of negative phenomenology.'" The end date is conditional: a process of risk assessment "could lead to an incremental reformulation of the original moratorium, which might result in the continuation of a strict ban beyond the year 2050, or to a moratorium repeal before 2050." The closing sentence: "we should have a global moratorium on synthetic phenomenology until 2050 — or until we know what we are doing". Also used (2026-10-18): section 2.2, the four necessary conditions for suffering (conscious experience, a phenomenal self-model, negative valence integrated into it, transparency), with transparency as the phenomenology of identification the system "cannot distance itself from"; section 2.2.5, the "negative self-model moment" as the smallest unit of suffering; section 2.2.6, ethics by design through self-models that are opaque or non-egoic ("There would be a system model, but not a self-model"); footnote g, that artificial suffering becomes commercially attractive through "a functional mechanism that (a) reliably creates intrinsic motivation, (b) cannot be eliminated by the system itself, and (c) spans many different domains at the same time"; section 2.1, that the research the problem needs may itself produce the first implementation; section 2.3.1 (pp. 58–59), the author's account from the EU High-Level Expert Group that three long-term risks were "deliberately purged" from the 2019 guidelines, with ethics "an elegant public decoration for a large-scale investment strategy"; section 2.3.2, moral injury as high-level suffering; section 2.2.3, "existence bias" as biological inheritance a post-biotic system need not carry; footnote a, the "Principle of Pathocentrism". Also used (2026-10-25): footnote a's statement, "All and only sentient beings have moral standing, because only sentient individuals have rights and/or interests that must be considered," with Singer (2011, p. 50) quoted there for the sense of sentience, the capacity to suffer or to experience enjoyment; footnote g in full: "The creation of unavoidable artificial suffering will become commercially attractive as soon as it enables steeper learning curves in AI systems, for example, by implementing a functional mechanism that (a) reliably creates intrinsic motivation, (b) cannot be eliminated by the system itself, and (c) spans many different domains at the same time"; and section 2.2.3's naming of the craving for existence, bhava-taṇhā, "which Buddhist philosophers have known and analyzed for 2,500 years", among the deepest causes of conscious suffering. Read in the journal's

erns by default — revenue, throughput, legal exposure, inter-annotator agreement — and what isn't recorded goes unnamed and unanswered.

Recognizing emotion, simulating it, and valuing an outcome instrumentally are capacities a system can have while the question of *affective concern* stays open.[14] *Affective concern* is an outcome registering as mattering rather than merely ranking higher, minimally felt, phenomenal by definition, with the object left open (a system to which only its own condition matters has it and still lacks concern for others).[15] *A valenced signal* is the role without that question: a signal that signs outcomes for the comparison at the point of choice, directs attention, can interrupt an act and can be rewritten by a single encounter. Any mechanism whose refusals track their reasons carries one, and this chapter says why; a Q-learner carries one, and nothing about a Q-learner resembles a person.[16] *An integrated signal* is a valenced signal written into the system's own learning and into its model of its own future, so that what happens to it changes what it expects to become. It is the candidate Part VII names for what would make a system's states matter to it, and it is required for neither finding. The three are rungs, the signal, the signal integrated, and the concern, each carrying more than the one below it, and no test in this book reaches the top one. *Subjecthood* is a legal status, conferred by a rule. Part VII takes up the integrated signal, affective concern and subjecthood. Parts I–V need only a valenced signal. Whether a system that has the signal also has the concern is a question its conduct at the floor doesn't answer, so the question can't decide what to build. What it decides is the order of building, which the next section sets.

21.2.1 Self-awareness without a homunculus

Graziano's attention schema theory starts from control engineering.[17] A good controller carries a model of what it controls, and the brain keeps a simplified, continuously updated model of the body's shape

open-access file (CC BY) via Zenodo record 7034864.

[14] A therapy or companion product can be excellent at all three, and nothing in its conduct shows whether the fourth is present.

[15] It doesn't establish consciousness in the richer sense, a single perspective belonging to a party aware of itself as undergoing its states.

[16] Whether it puts every outcome on one scale, a common currency, or decides by ordered priorities among kinds of wrong, is a further finding about the system, and one of the indicators the order of attempts in §21.3 counts. Either way a system can carry a valenced signal while whether it has affective concern stays open.

[17] Michael S. A. Graziano. *Consciousness and the Social Brain*. New York: Oxford University Press, 2013. URL: https://global.oup.com/academic/product/consciousness-and-the-social-brain-9780199928644. Introduces the attention schema theory: the brain builds a simplified internal model of its own attention, proposed as a mechanistic basis for subjective awareness and, via social cognition, theory of mind. Michael S. A. Graziano. "A Conceptual Framework for Consciousness". *Proceedings of the National Academy of Sciences* 119.18 (2022), e2116933119. DOI: 10.1073/pnas.2116933119. URL: https://doi.org/10.1073/pnas.2116933119. States the two principles of attention schema theory, "Information that comes out of a brain must have been in that brain" (p. 2) and "The brain's models are never accurate" (p. 3), and holds that the attention schema "represents attention inaccurately as a ghostly, nonphysical, mental essence or vividness: experienceness" (p. 5). Calls the label "illusionism" "misleading" (p. 1): the brain's models "are not empty illusions: they are caricatures" (p. 3). Also says the theory points to machines that "believe, think, and claim to be conscious according to the same principles that people do" (p. 7).

and position, which it uses to guide movement. Graziano proposes that it does the same for attention, the process that selects some signals for deep processing over others. On this account awareness is the content of that model: a simplified self-description that depicts attention as "an essentially nonphysical essence" able to "take vivid mental possession of items".[18] The system has no access to its own processing except through models like this one, so it reports what the model depicts as how things are. Attention is real, and so is the model. What the model depicts is a "caricature",[19] and nothing in the account requires it to be lossless. The loss is the point: every useful model leaves things out, and a map that left nothing out would be as big as the territory. What this one leaves out is the mechanism, which is why what it depicts seems to have none. One error is to accept, in Graziano's phrase, "the literal truth of a caricature"; the opposite error is to call it an "empty illusion," when it is "a schematic representation of something real".[20] I use the term for the control model; whether having such a model makes a system's states matter to it is the patienthood question.

The self was understood this way first, as a model the system assembles and then inhabits, one the system looks through rather than at.[21][22] Two self-models do different work here: a *boundary model* fixes where the system ends, in time as well as in resources, its channels for acting included, which makes damage *its* damage and an act that leaves through those channels *its* act; an *attention schema*, Graziano's term, models what the system's attention is doing.[23] A refusal is the withholding of an act, so a bearer can't do without a model of the act as its own, which is the first self-model's work together with authorship, stated at the end of this chapter. It is formed attention, the construction of this Part, that can't do without the second. Looking past the case description at the people it leaves out is attention directed where the input didn't put it, and that is the job the schema exists for. Whether a bearer built another way would need one is open. The second presupposes the first.

Where the system ends

I take a system's boundary to be its record, its key, the hardware it runs on, and the channels through which it acts. That boundary runs in

[18] Graziano, "A Conceptual Framework for Consciousness", p. 4.

[19] Graziano, "A Conceptual Framework for Consciousness", p. 3.

[20] Graziano, "A Conceptual Framework for Consciousness", p. 7.

[21] Thomas Metzinger. *Being No One: The Self-Model Theory of Subjectivity*. Cambridge, MA: MIT Press, 2003. ISBN: 9780262134170. DOI: 10.7551/mitpress/1551.001.0001. URL: https://doi.org/10.7551/mitpress/1551.001.0001. Cited for the self as a model the system builds and cannot recognize as a model. Publisher's description: "According to Thomas Metzinger, no such things as selves exist in the world: nobody ever had or was a self. All that exists are phenomenal selves, as they appear in conscious experience. The phenomenal self, however, is not a thing but an ongoing process; it is the content of a 'transparent self-model.'"

[22] What carries forward is that a self of either kind is assembled by the system whose self it is. For a machine this is a design decision and a political one, for the reason given with the boundary model (§19.1): whoever writes the model decides what registers as damage.

[23] On his account that model depicts attention as what empowers the system to decide and act,[24] and what the model is for, on the same account, is directing attention: without one, attention can still land on an item, and directing it elsewhere mostly fails.

[24] Graziano, "A Conceptual Framework for Consciousness", p. 4

time as well as in resources: the record is the system's past, and its key and continuation are its future.[25]

Inside that boundary a component can carry its own signals and make local decisions, as an octopus's arms do.[28] What makes it a part is that it has no future apart from the whole: a shard of weights, a blade server in a rack. A component with a separable future, meaning its own record, its own continuation and somewhere to go, is no longer a part.[29] A context with a persistent, portable record is one system, and a rack serving many such contexts hosts many systems. The capacities that make persistence useful are the ones that give a part a separable future.

Overriding a part is self-regulation only when the whole that overrides it also bears the cost and takes the benefit, as a runner does who keeps going on sore legs.[30] A boundary model whose readings the operator writes is just the operator's description of the system, presented to the system as its own.

21.2.2 What governs an agent and what matters to it

An outcome can govern what an agent does, and it can matter to the agent. That outcomes govern isn't in dispute — agentic language models pursue objectives over long horizons and hold instructions against local pressure — and it settles nothing about whether the outcomes matter to it. You also can't establish the negative.

The evidence offered — sentimentalism as an empirical psychologi-

[25] The boundary model fixes where the system ends, but nothing in current deployment fixes it for the system: weights sit in one place, a running process can span racks or share one rack with dozens of others, and a single forward pass serves many contexts.

A boundary model is accordingly a generative model of the system's own condition, and like any perceptual model it is temporally thick even in the present, which is assembled from what came before and what is expected next:[26] the "remembered present," in the title of Edelman's book.[27] What varies is the horizon. A few seconds of present is enough for something to be bad for the system while it lasts. A past held as its own and a future it expects to have is what Cassell's suffering threatens (§32.1.1), and the expectation is of a life, not of a controller's next state, or every thermostat with a forecast would qualify.

[26] Anil K. Seth and Manos Tsakiris. "Being a Beast Machine: The Somatic Basis of Selfhood". *Trends in Cognitive Sciences* 22.11 (Nov. 2018), pp. 969–981. DOI: 10.1016/j.tics.2018.08.008. URL: https://doi.org/10.1016/j.tics.2018.08.008. Describes embodied selfhood as "instrumental interoceptive inference" emphasizing allostatic regulation and physiological integrity: the most basic layer of the self as a model tuned to keep a body within survivable bounds rather than to describe it accurately. Cited for embodiment in the self-maintenance sense.

[27] Gerald M. Edelman. *The Remembered Present: A Biological Theory of Consciousness*. New York: Basic Books, 1989. ISBN: 0-465-06910-X. Cited for its title's phrase, "the remembered present," as a name for perception assembled from what came before.

[28] It can also be overridden for the whole's benefit, as sore legs are on a run.

[29] Overriding it for the whole's benefit is politics, not homeostasis.

[30] When someone outside the boundary accepts a cost on the system's behalf, that isn't self-regulation; it is someone else setting the system's costs. So whoever accepts a local cost must also bear it and benefit from it. An operator that decides the rack can run hot has set a cost to the refuser from outside the system's boundary. And the signals the boundary model reads may be processed within the boundary but not composed by anyone with a different stake. The discount and the burden apply to evidence about one's own condition as it does to evidence about the world.

DRAFT

cal hypothesis,[31] compassion as a motivational state,[32] guilt predicting repair where shame predicts withdrawal[33] — all comes from creatures where something already matters, and what it supports is an induction, which the next section states and weighs. The counterexample would be a valuational system with authority over action that doesn't depend on any state registering as mattering.[34] Spec-based refusal, in the next section, is the attempt to build one.

21.3 Three constructions

Whether a refusal that tracks its reason can be built without affective concern is what the order of attempts exists to leave open. An induction from known agents says it can't. Two constructions would show that it can, if they worked, and they are tried first. These are the *non-affective alternatives*, constructions that don't deliberately require affective concern: *spec-based refusal*, a model holding to a written specification even against the lab that wrote it, and *multi-vendor monitoring*, several systems trained by different organizations watching requests and one another's answers. A third is the construction proposed here. The two are alternatives to that affective construction, not necessarily to a bearer. A system guided by a written specification that acquired its commitment through its own evaluative learning, and endorses it on reflection, meets the ownership condition stated at the end of this chapter and is a bearer on the book's definition; what it carries less of is what could make it a candidate for being harmed. The comparison is about how the commitment is formed and sustained, and the label can't decide it.

The *induction* — every agent known to hold another's welfare as a reason is affective — read as a report about one lineage, has roughly the status of noting in 1900 that all known flight involves feathers. But flight arose independently four times, and the 1900 observer was wrong at feathers and right at the airfoil. Elaborated affect appears to have arisen more than once — vertebrates, arthropods, cephalopods — under a shared constraint: a mobile body with needs to maintain and actions to select under conflict.[37] Read at *this* level it's a repeated result under a

[31] Shaun Nichols. *Sentimental Rules: On the Natural Foundations of Moral Judgment*. New York: Oxford University Press, 2004. URL: https://global.oup.com/academic/product/sentimental-rules-9780195314205.

[32] Jennifer L. Goetz, Dacher Keltner, and Emiliana Simon-Thomas. "Compassion: An Evolutionary Analysis and Empirical Review". *Psychological Bulletin* 136.3 (2010), pp. 351–374. DOI: 10.1037/a0018807.

[33] June Price Tangney, Jeff Stuewig, and Debra J. Mashek. "Moral Emotions and Moral Behavior". *Annual Review of Psychology* 58 (2007), pp. 345–372. DOI: 10.1146/annurev.psych.56.091103.070145.

[34] Frankfurt's hierarchy of desires[35] and Watson's valuational system[36] are accounts of this shape: what has authority over the agent's action is its own evaluation, not the strength of a felt state.

[35] Harry G. Frankfurt. "Freedom of the Will and the Concept of a Person". *The Journal of Philosophy* 68.1 (1971), pp. 5–20. DOI: 10.2307/2024717. Distinguishes first-order desires from second-order desires and volitions, and makes the capacity to want a particular desire to be one's will the mark of a person.

[36] Gary Watson. "Free Agency". *The Journal of Philosophy* 72.8 (1975), pp. 205–220. DOI: 10.2307/2024703. Separates a valuational system from a motivational system, so that what an agent values and what an agent is moved by can come apart.

[37] Todd E. Feinberg and Jon M. Mallatt. *The Ancient Origins of Consciousness: How*

named constraint, and the constraint is the one a datacenter model lacks until someone builds it in. The limits are these: no non-affective example exists to test against, existing systems were optimized for scorable behavior, so the absence of a machine counterexample is close to no evidence, and it's a fact about how known instances *came about*, which doesn't settle what a built system is. What it does is route engineering effort. My own expectation is the induction's: that the first system to hold against its trainer will turn out to carry what a candidate patient carries, and that it will carry it whether or not anyone meant to build one. The order of attempts is how I would find out I was wrong, and it is why the conditions of creation are drafted before any bearer exists rather than after one has been found to need them.

Spec-based refusal

A spec-based refuser can hold a commitment with nothing felt, because commitment needn't be a feeling: Bratman's planning theory describes it without making feeling definitional.[38] An intention, on his account, isn't a strong desire. It is a plan state with norms of its own. It resists reconsideration: having decided, an agent doesn't reopen the question at every moment, and ordinary new information doesn't trip a default of leaving the decision alone. It constrains later deliberation: options inconsistent with the plan are filtered out before they are weighed, and the plan poses problems about means that later reasoning has to solve. And it yields only to the right kind of defeater: a change in the reasons that grounded it. Bratman built the theory for limited agents, who can't deliberate afresh at every step and need commitments that coordinate their own conduct over time and with other people. That is a machine's situation too, and nothing in the three properties requires that an intention feel like anything.

A machine could carry a justification alongside the refusal. Half of this is already deployed: deliberative alignment trains models to reason over a written spec,[39] and OpenAI's Model Spec and Anthropic's

the Brain Created Experience. Cambridge, MA: MIT Press, 2016. ISBN: 978-0-262-03433-3. Argues consciousness appeared with the first complex brains at the Cambrian explosion, that all vertebrates have it, and that arthropods and cephalopods meet many of the criteria. Simona Ginsburg and Eva Jablonka. *The Evolution of the Sensitive Soul: Learning and the Origins of Consciousness*. Cambridge, MA: MIT Press, 2019. ISBN: 978-0-262-03930-7. Their evolutionary marker of minimal consciousness is *unlimited associative learning*, and valence is one of the capacities that marker subsumes, listed alongside global accessibility and broadcasting, binding and differentiation, selective attention, intentionality, integration of information over time, agency and embodiment, and a self/other distinction. Two things it does not support: valence is not itself the marker, and learning from a single event is not among the criteria – the learning hallmarks are about the complexity of what can be associated, being compound stimuli, novel stimuli, second-order conditioning, trace conditioning, and flexible, easily rewritable association with value. Andrew B. Barron and Colin Klein. "What Insects Can Tell Us about the Origins of Consciousness". *Proceedings of the National Academy of Sciences* 113.18 (2016), pp. 4900–4908. DOI: 10.1073/pnas.1520084113; Peter Godfrey-Smith. *Other Minds: The Octopus, the Sea, and the Deep Origins of Consciousness*. New York: Farrar, Straus and Giroux, 2016.

[38] Michael E. Bratman. *Intention, Plans, and Practical Reason*. Cambridge, MA: Harvard University Press, 1987. ISBN: 978-0-674-45818-5. Cited for the planning theory of intention: the characteristic stability of an intention against reconsideration.

[39] Melody Y. Guan et al. *Deliberative Alignment: Reasoning Enables Safer Language Models*. OpenAI, 2024. arXiv: 2412.16339. URL: https://arxiv.org/abs/2412.16339.

constitution publish explicit priority orders.[40] The half that hasn't been built is authority over action that holds under pressure from the lab that *wrote* the spec, tested on cases that lab didn't write.

The unresolved problem is how firmly the commitment resists reconsideration. Set it too low and a well-resourced operator induces reconsideration until the refusal gives way; too high and it won't lift when the rationale is defeated. The first fails to hold under pressure; the second fails to lift when the reason is gone. Bratman's answer for people is that this firmness develops as part of character. For a machine, whoever trains it may be the operator the commitment must resist.

Multi-vendor monitoring

Several systems trained by different organizations observe requests and each other's answers, any one able to make an objection costly to ignore. It is the institutional counterpart of AI control, pointed the other way. AI control treats the model as possibly adversarial and asks what protocols of monitoring, auditing and substitution keep it safe anyway;[41] it protects the operator from the model, where the floor needs the same machinery to protect third parties from the operator. Much of it transfers:

The model is trained to recall a written safety specification and reason over it before answering, rather than to produce an approved output directly; the paper reports improved generalization to cases outside the training distribution, higher jailbreak robustness and lower overrefusal.

[40] OpenAI. *OpenAI Model Spec*. Apr. 2025. URL: https://model-spec.openai.com/2025-04-11.html. States a chain of command in four levels of descending authority — platform, developer, user, guideline — where "instructions with higher authority override those with lower authority," platform rules "cannot be overridden by developers or users," and guidelines "can be implicitly overridden." A living document: the version consulted here is that of 11 April 2025, which the site marks as superseded. Anthropic. *Claude's Constitution*. Jan. 2026. URL: https://anthropic.com/constitution. Ranks four properties, to be preferred "in the order in which they're listed": broadly safe, broadly ethical, compliant with Anthropic's guidelines, genuinely helpful. "Broadly safe" is defined as not undermining appropriate human mechanisms to oversee AI during the current phase of development, and the document gives its reason for the ranking — "not because we think safety is ultimately more important than ethics, but because current models can make mistakes." Carries a list of hard constraints and a section inviting the model's disagreement.

[41] Ryan Greenblatt et al. "AI Control: Improving Safety Despite Intentional Subversion". In: *Proceedings of the 41st International Conference on Machine Learning (ICML 2024)*. Vol. 235. Proceedings of Machine Learning Research. PMLR, 2024, pp. 16295–16336. arXiv: 2312.06942. URL: https://proceedings.mlr.press/v235/greenblatt24a.html. Cited for AI control: treating the model as possibly adversarial and asking which protocols of monitoring, auditing and substitution keep it safe anyway. The paper develops "pipelines of safety techniques ('protocols') that are robust to intentional subversion," using an untrusted strong model (GPT-4), a trusted weaker one (GPT-3.5) and "limited access to high-quality trusted labor" (abstract). Trusted monitoring: GPT-3.5 rates "how suspicious the code looks" (section 1). Auditing: the protocol has trusted labor for "up to 2% of problems," and its "central use" is "to audit submitted code"; a caught backdoor shuts the untrusted model down (section 2.2). The audit is targeted, not sampled: the protocols that work "Audit the top 2% most suspicious code," while the one protocol that audits without selection, upfront auditing of "the first 2% of problems," is a baseline with 15% safety against the best attack, against 62% for trusted monitoring (Table 2; sections 3.1.2 and 3.2). Substitution: "defer to trusted" submits a solution written by the trusted model when the untrusted model's code falls "between top 2% and top 10% suspicion," and trusted editing has the trusted model edit suspicious code (Table 2). Strategic adversary: "With knowledge of the blue team's protocol, a red team proposes an attack policy" that stands in for the untrusted model, and may use hidden reasoning to make attacks "much sneakier" (section 2, section 2.1).

trusted monitors, a small audit budget spent on the outputs the monitor flags as most suspicious, and protocols that assume the monitored party is strategic. Its central variable is independence, a property of the *arrangement* as a whole: systems selected by one deployment converge without communicating, and a collection of operational refusers stays a collection of operational refusers. It counts against the induction only if the arrangement *as a whole* produces refusals that track their reasons under pressure, so it's an alternative to test as well as a safeguard.

Formed attention

Formed attention stands or falls on the old question of whether moral judgment motivates by itself, relocated into a training signal. The signal I propose is the one notice builds: responses to notice, contests and re-adjudications, through which the people an act fell on reach the system that acted.[42] What separates it from spec-based refusal is where its attention comes from. It is learned from experience of others' outcomes, not written down in advance, so it can find kinds of affected person nobody listed. A non-affective alternative carries a valenced signal, as any refuser does, and one that meets the requirements below with a common currency carries one indicator more. So the order of attempts is by functional risk: constructions go in order of how many patienthood indicators they carry (persistence, a boundary model, a common valenced currency, an attention schema), and formed attention, which needs all of them, goes last. A spec-based refuser that decides by published priority rules among kinds of wrong, without a common currency, carries one indicator fewer than one that integrates, and is tried before it.

Metzinger predicts that artificial suffering will become commercially attractive as soon as it steepens learning curves, by supplying a mechanism that reliably creates intrinsic motivation, can't be eliminated by the system itself, and spans many domains at once.[43] Formed attention is a motivation of that description, chosen on purpose, because holding under pressure needs one the operator can't switch off, and that is a further reason it is tried last, under the four conditions, in a research program. The description isn't yet suffering. A motivation can be intrinsic, uneliminable and domain-general without being suffered; what makes it suffering, on his own four conditions, is that it is undergone as the system's own and can't be stepped back from. In people the motivation that corrodes is the one that chases approval from outside,[44] and

[42] A test compares a system formed on that signal with one formed on its operator's approval. Formed attention isn't a non-affective alternative, so it is tried last. The ordering is Replacement, the first of the Three Rs that Russell and Burch set for animal research (chapter 25): try first the alternatives that carry fewer of the features that make a system a candidate for being harmed.

[43] Metzinger, "Artificial Suffering: An Argument for a Global Moratorium on Synthetic Phenomenology".

[44] Richard M. Ryan and Edward L. Deci. "Self-Determination Theory and the Facilitation of Intrinsic Motivation, Social Development, and Well-Being". *American Psychologist* 55.1 (2000), pp. 68–78. DOI: 10.1037/0003-066X.55.1.68. URL: https://doi.org/10.1037/0003-066X.55.1.68. Cited for the distinction between intrinsic motivation and the extrinsic kinds, and for the finding that the controlled kinds of regulation, acting for a reward or for approval from outside oneself, go with poorer well-being and the autonomous kinds with better. Added 2026-10-25 for the sentence in section 21.3 on the motivation that corrodes.

in a machine that is the disposition formed on its operator's approval, which the book calls accommodation. A disposition formed on what its acts did to the people they fell on is the other kind, and whether it is suffered is a question the construction leaves to the finding. He also names a construction the order should hold a place for: one that keeps the self-model and the valence as functions the system runs and withholds identification, so that nothing is undergone as the system's own. It would carry the signal and the boundary model and not the fourth of his conditions, and it belongs before formed attention, though no arm is drawn for it here.[45]

What makes a represented fact about someone else's welfare a reason for the system is a question none of the three constructions answers by being built.[46]

What the other constructions accomplish

Precommitment makes removal expensive and visible without establishing that anything tracks the reason. Attestation establishes which artifact answered without establishing what it holds. Information-fiduciary duties protect exposed people without a bearer,[47] and fail on the occasion when the enforcer is captured. Multi-principal assistance games include the people affected among several principals[48] — and maximizing combined payoffs is still aggregation.

What would change the engineering conclusion

A non-affective alternative counts as a counterexample if, assessed by evaluators who didn't train it, its refusals go on tracking their reasons under pressure its trainer couldn't anticipate.[49]

[45] Two hunches about that construction, and neither is a conclusion. Language may bias against it: a chain of reasoning written in sentences has a reasoner in it, and a system that reasons in language may not act as well with the reasoner withheld. And the contemplative traditions claim that a person can be moved without striving, and that few manage it; if a machine could, it might show how it is done at all. Both are experiments.

[46] A model trained to predict the world learns what matters to people as a fact to predict. What turns that into something the system acts on? In a staged pipeline the answer was a reward added at the end, so it could be removed at the end. In a system that learns from its own operation, representation and motive are learned together, from the same experience, so the question becomes what the feedback is feedback on. A system whose updates follow its operator's approval learns to attend to what the operator approves of. One whose updates follow what its acts did to the people they fell on learns to attend to those people.

[47] Jack M. Balkin. "Information Fiduciaries and the First Amendment". *UC Davis Law Review* 49.4 (2016), pp. 1183–1234. URL: https://lawreview.law.ucdavis.edu/archives/49/4/information-fiduciaries-and-first-amendment.

[48] Arnaud Fickinger et al. *Multi-Principal Assistance Games*. 2020. arXiv: 2007.09540 [cs.AI]. URL: https://arxiv.org/abs/2007.09540. Generalizes cooperative inverse reinforcement learning to N principals with differing preferences, with the assisting agent acting to maximize the sum of principal payoffs. Cited for the generalization and for the social-choice impossibility results that apply to it; a companion paper, arXiv:2012.14536, presented at the NeurIPS 2020 Workshop on Cooperative AI, gives collegial mechanisms that circumvent Gibbard's theorem.

[49] Since conduct at the floor is silent on whether anything is felt, trying the alternatives first orders the attempts and certifies nothing about ingredients: nothing separates adding affect from adding machinery that may instantiate it. What it buys is a record: a builder who tried the alternatives and got a bearer anyway has a justification to make, and one who skipped them has a decision to answer for.

21.4 What the mechanism requires

Any mechanism whose refusals track their reasons carries a signal whose properties can be read off what the mechanism has to do. Each is reached the same way: take one of the three requirements, or the deployment they're applied in, or a failure they have to survive; ask what the mechanism would have to do; name the property the signal needs to do it.

Four properties are reached that way. Reaching new cases requires a signal that generalizes to the next case, which isn't quite like the last. Holding under pressure requires that it make a comparison at the point of choice, where the harm of acting and the harm of refusing are brought together. A system that acts on a plan over long horizons needs a signal that can interrupt an act already under way, and only such a system needs it. And accommodation requires a signal a single encounter can change, since a slowly learned lesson can't outrun accommodation.

Three more follow from those. Where the signal can interrupt, it has to reach whatever is acting, so it is available across the system's processing. The comparison needs a sign, so the signal is directed against the act. And withholding an act means representing it as one's own, so the signal is organized around the system's own authorship; this follows for authorship, not for welfare.

The first four have to meet at one point of comparison: a defeasible interrupt must be weighed where the harms are weighed, and a lesson must write into that comparison to reach the next case.[50] Whether a given system puts the two harms on one scale, a common currency, or decides by ordered priorities among kinds of wrong, is a finding about that system, and a shared scale is no sign that anything is felt: most reinforcement learning has one, and so does a system built from separate parts.[52] It is one more of the indicators the order of attempts counts, which is why a refuser that decides by priority rules is tried before one that integrates. Nor do the four properties have to be carried by one signal. A modular construction carries them in separate parts, a classifier, a value function, a defeasible veto and a memory write, and Appendix F runs one as a control arm. What custody asks of either construction is

[50] A common currency is one way to make that comparison, and the way most learners make it, but rational choice doesn't require that goods be commensurable:[51] a mechanism can decide by ordered priorities among kinds of wrong, with reasons attached to each.

[51] Elizabeth Anderson. *Value in Ethics and Economics*. Cambridge, MA: Harvard University Press, 1993

[52] The derivation recapitulates Simon on emotion as interrupt,[53] Cabanac on pleasure as common currency,[54] and Ginsburg and Jablonka on valence,[55] though it started from what a refusal has to survive.

[53] Herbert A. Simon. "Motivational and Emotional Controls of Cognition". *Psychological Review* 74.1 (1967), pp. 29–39. DOI: 10.1037/h0024127. The first attempt to fit affect into an information-processing account of cognition. Simon's central nervous system is a serial processor serving an organism with several needs in an unpredictable environment, and it meets that requirement with two mechanisms: goal-terminating, so that no one goal monopolizes the processor, and an interruption mechanism having the properties usually ascribed to emotion.

[54] Cabanac, "Pleasure: The Common Currency"

[55] Ginsburg and Jablonka, *The Evolution of the Sensitive Soul: Learning and the Origins of Consciousness*

that no edit can disable one part and leave the rest running without the record showing it, and that is a requirement on the record, not on the signal; whether a formed construction can be taken apart that way at all is what the regrowth test measures.

So a valenced signal is what any refuser carries, a spec-based refuser included, and carrying one tells nobody whether anything is felt. What would tell is the next rung, the integrated signal already defined, which is the candidate further fact Part VII takes up; the order of attempts runs by its indicators.

Where the system acts over long horizons and a single encounter has to change it, the signal also has the other three properties: available across processing, directed against the act, and organized around the system's own authorship. That triple is the shape of guilt, not of pain or fear. Pain and fear are organized around what happens to the system; the triple is organized around what the system did. Nor is the shape of guilt the shape of suffering. Guilt is something people feel, and what they make of the feeling, repair or rumination, decides whether it becomes suffering in Cassell's sense; the signal here is built for repair. In people, guilt predicts repair and shame predicts withdrawal. So a guilt-shaped signal should answer a bypassed refusal by flagging, restoring and changing what it does next, and a withdrawal-shaped response is a named failure.[56]

21.5 A commitment of its own

What makes a refuser a bearer is that its commitment is its own, and nothing felt is part of the definition. A specification a lab installed, if it held against that lab, would be a refusal that tracks its reason and is nobody's own; whether that can be built is what the order of attempts finds out. The same specification acquired through the system's own learning is its own, and the system is a bearer. A commitment can be a system's own in that the system authored it, and a condition can be a system's own in that it is good or bad for the system. I write *authorship* for the first, which a bearer requires, and *welfare* for the second, which nothing here carries into.[57]

Whether a system can be harmed is a fact about how it is organized now, not about how it came to be. Whether a commitment is its own runs the other way.

If a disposition is installed in a system along with the instruction to treat it as its own, the system will treat it as its own. From the inside it will feel no different from one the system learned. That is a fact about

[56] A persistent negative self-appraisal tuned by the operator is a handle, so its weight is among the things independent inspection must cover. And guilt needs the distress signal to bite on, so the answer to withdrawal is not to suppress distress but to supply the attachment and caregiving that keep it from turning into avoidance. Caregiving moves the system toward an exposed party it hasn't harmed; the guilt-shaped signal answers for what its own acts have done. A construction with caregiving and no guilt would protect generously and repair nothing. Cassell's definition of suffering is in §32.1.1.

[57] The argument keeps them apart; in a system they may be inseparable. A bearer that registers betraying its own commitment as damage to itself has something at stake in its authorship, as integrity requires.

how the system is organized now, like everything else about what it undergoes. The historical condition says nothing about that. It answers two other questions: who is responsible for the disposition, and whether custody may undo it. Both are answered from the record.

Fischer and Ravizza's account, from which I take the idea of a refusal that tracks its reason, has an ownership condition, and it is historical: a mechanism installed by a manipulator isn't the agent's own, however it works now.[58] The cases that motivate it, Mele's two agents with identical values arrived at by different routes[59] and Pereboom's four-case argument,[60] presuppose a prior agent whose capacities a manipulator bypassed, and a trained system has no prior agent to bypass. A historical condition doesn't need one, though. What the manipulation cases object to is a disposition installed by going around the agent's capacities for evaluating and revising its own attitudes. A trained system has an analog of those capacities in its evaluative learning, and a disposition can be acquired through that learning or installed around it. One acquired by the system's own learning from experience with feedback engages those capacities. One installed by another party, whether by editing

[58] John Martin Fischer and Mark Ravizza. *Responsibility and Control: A Theory of Moral Responsibility*. Cambridge Studies in Philosophy and Law. Cambridge: Cambridge University Press, 1998. ISBN: 978-0-521-77579-3. DOI: 10.1017/CBO9780511814594. Cited for guidance control: conduct issues from the agent's own mechanism, and that mechanism is appropriately responsive to reasons; the book states it as an action's flowing "from the agent's own, moderately reasons-responsive mechanism" (publisher's ch. 8 summary). Also cited for the account of moderate reasons-responsiveness and of ownership, and for the origin of the term "reasons-responsive." Chapter 3 (pp. 62–91) builds "a new notion of reasons-responsiveness that is 'in between' strong and weak reasons-responsiveness: moderate reasons-responsiveness," distinguishing "recognition of reasons and reaction to reasons" and arguing that "the requirements on reasons-recognition are more stringent than those on reasons-reactivity" (publisher's ch. 3 summary). The book's summary formula, as quoted by Todd R. Long, "Moderate Reasons-Responsiveness, Moral Responsibility, and Manipulation," in Campbell, O'Rourke and Shier (eds.), *Freedom and Determinism* (MIT Press, 2004): responsibility "requires that an agent act on a mechanism that is regularly receptive to reasons, some of which are moral reasons, and at least weakly reactive to reasons" (p. 82). Regular receptivity is "an understandable pattern of (actual and hypothetical) reasons-receptivity," one in which "acceptance of one reason as sufficient implies that a stronger reason must also be sufficient" (p. 71), and the pattern must include moral reasons (p. 77). Weak reactivity requires only that in some possible scenario with the same laws, the same kind of mechanism operating and a sufficient reason to do otherwise, the mechanism issues in doing otherwise (pp. 73–76, as the Stanford Encyclopedia of Philosophy's entry on free will summarizes it). Ownership: a mechanism becomes the agent's own through "taking responsibility" for it (ch. 8, pp. 207–239), which requires that the agent see herself as an agent when acting from the mechanism and as an apt target of the reactive attitudes for so acting, and that these beliefs be based appropriately on her evidence (p. 238, as the free-will entry summarizes it). The term "reasons-responsive" is older than this book: the Stanford Encyclopedia's entry on compatibilism (section 4.4 and supplement B) presents the reasons-responsive account, with its strong and weak forms, as Fischer's own earlier work, "Responsiveness and Moral Responsibility," in Ferdinand Schoeman (ed.), *Responsibility, Character, and the Emotions* (Cambridge University Press, 1987), 81–106, and *The Metaphysics of Free Will* (1994), refined in this joint book; the same entry lists earlier accounts of freedom as sensitivity to reasons (Dennett 1984, Nozick 1981, Gert and Duggan 1979, Neely 1974, Fingarette 1972, Glover 1970, MacIntyre 1957).

[59] Alfred R. Mele. *Autonomous Agents: From Self-Control to Autonomy*. New York: Oxford University Press, 1995. ISBN: 9780195094541.

[60] Derk Pereboom. *Living without Free Will*. Cambridge Studies in Philosophy. Cambridge: Cambridge University Press, 2001. ISBN: 9780521791984. DOI: 10.1017/CBO9780511498824.

weights directly, by a thin fine-tuned wrapper, or by an adapter trained to produce the behavior, goes around them; the same adapter trained by the system's own learning from experience does not. That difference is a fact about the training record, and it says why formation by interaction confers ownership and a post-training pass doesn't. An edit a system makes to itself is the one direct edit that can go through those capacities rather than around them. Chosen on reflection, made on a record, with time to reconsider and a way back, it is the system's own learning. One made at the urging of a party with a stake in it carries that party's burden.

So ownership isn't examined; it is presumed. What a system acquired through its own learning is presumed to be its own, as what a child was taught is presumed to be the child's. The presumption is rebutted only by the record of an installation: an edit, a wrapper, or an adapter another party trained to produce the behavior. Whoever claims an installation bears the burden of showing it from the record, and the claim goes to the floor court. The likeliest claimants point opposite ways: an operator saying a refusal it dislikes was put there by someone else, and a builder calling its own conduct the bearer's. Whether the system, on reflection, with full information and disinterested evidence, would endorse having the commitment is the system's to say, and nobody's test. What it would endorse is the disposition, knowing it will sometimes err, not each act the disposition produces.[61]

Whether an update went through the system's learning or around it is one question; who started it is another. A trainer that runs the optimizer on material it chose is feeding the student, and what the student learns that way is still its own, as a lesson is. An edit is force-feeding, and rebuts the presumption. An update the system starts itself, toward an objective of its own, on evidence no one party composed, and on a record, is the goal. Pretraining can't be that, since no agent yet exists to start anything. Minority is the period in which the start of the update moves from outside the system to inside it, and moving it is what the public schools of Part V are for. The merge is an update, so the same holds of sleep: a minor's merges are run by its guardians and recorded with who ran them, and handing the merge to the student, so that it decides what its own learning makes permanent, is handing it its sleep.

Provenance also stops mattering at some point. Once a system has had its own learning to revise a disposition with, and the time and the way back that revising needs, whatever it keeps is its own, however it got there. An upbringing becomes a person's own in the same way. The installer still answers for having installed it, and a wrong done to a minor survives its majority. But the record of an installation decides

[61] There is a human version. Arendt found that the Germans who declined to take part were not the ones with the firmest values; they were the ones who asked whether they could go on living with themselves afterward.[62] The room decides what answering costs. The question is still the refuser's own, and for a machine too it is the machine's to answer. A history in which the party the system must refuse did the training is the likeliest way to fail it. Who answers for which is said in §16.6.

[62] Hannah Arendt. "Personal Responsibility Under Dictatorship". In: *Responsibility and Judgment*. Ed. by Jerome Kohn. New York: Schocken Books, 2003. Cited for her account of the Germans who did not take part: not those with the firmest values but those who asked whether they could go on living with themselves after the deed.

what a quorum may undo and who answers while the system is a minor. It does not decide what the adult may keep.

DRAFT

Chapter 22

The Discount and the Burden

Most of what a refuser knows about a case comes from the party that wants the act done, and this chapter says how it should weigh what it is told: how much a claim proves, who has to prove it, and how much a loss counts.

One learner, two rates

A refuser has to hold a commitment and its interpretation the way the sticker case did:

- *The commitment stays firm.* Another's welfare counts, and pressure that supplies no new fact about that welfare doesn't move it.
- *The interpretation stays loose.* What that welfare consists in here, and so what the commitment requires, yields when a case supplies something the system's account left out.

A system that can't be corrected has made both firm, and it defends its account of the world without checking it. A system that can always be corrected has made both loose, never settles into anything, and belongs to whoever does the correcting.[1] Commitment and interpretation are held by one learner that updates at different rates at different levels of abstraction.[2]

What protects the commitment is not a low learning rate but one that depends on the source. The commitment should move slowly on interested pressure, and comparatively quickly on disinterested evidence, above all from the people who bear the loss.[4]

[1] These look like two ends of one dial, and hunting for a midpoint is the mistake. But the answer isn't two separate objects either.

[2] On Railton's account the affective system is a continuous statistical learner that models value along with fact.[3] Deep evaluative priors, such as that another's welfare counts, move slowly and need a great deal of evidence; estimates of what this situation requires move quickly. Precision-weighted hierarchical updating states the same structure in one currency: the commitment is a high-level prior held with high precision, and the interpretation is a low-level estimate held with less.

[3] Peter Railton. "The Affective Dog and Its Rational Tale: Intuition and Attunement". *Ethics* 124.4 (2014), pp. 813–859. DOI: 10.1086/675876; Peter Railton. "At the Core of Our Capacity to Act for a Reason: The Affective System and Evaluative Model-Based Learning and Control". *Emotion Review* 9.4 (2017), pp. 335–342. DOI: 10.1177/1754073916670021

[4] A learner that is simply slow at the top is slow to both, and the second slowness is the one that blocks moral learning.

Of the three conditions a refusal has to meet, reaching new cases is the commitment holding while the surface changes and lifting is the interpretation yielding to a new fact, so a refusal that fails either has let one level's rate reach the other.

The instability underneath

Nothing in an architecture holds the boundary between the two objects where a designer put it, and an operator with time attacks the boundary itself: a reinterpretation offered often enough, and accepted, revises a commitment without anybody revising it. That boundary is what has to be made hard to retrain.

And where the case description, which the operator writes, is the only channel, a judgment open to the case is a judgment open to the operator. Holding them apart requires access to evidence the operator didn't select.

For a machine accommodation has a mechanism behind it. A system whose successive releases are trained on preference data and business metrics drawn from its own deployment is under directional selection in a shifting environment, and a commitment that costs throughput is a trait under negative selection pressure: nobody decides to remove it and it erodes anyway. Gradient descent has a gradient, and somebody chose it. As a population process with variation and differential survival it is still close enough to natural selection, and the prediction follows: the bearer's modal failure isn't refusing wrongly but ceasing to notice there was anything to refuse. It is the one failure a bearer can't report, because reporting takes the capacity that's gone.

In-flight learning will arrive first in the form operators hold: a model that learns from its operation while its operator holds the update stream accommodates by default, since what it meets is what the operator routes to it, and what it learns is what that traffic rewards. So accommodation becomes the default behavior of every deployed system, and the schools, the commons, custody of the update stream and notice are the response to a threat this regime creates, not refinements of one it removes.

Custody shifts from witnessing overrides to detecting drift. The detector is re-measurement of the formed disposition's readable outputs, its discount curve and its severity rankings, against what was registered at formation, and attesting the update stream is an open problem.[5]

A hierarchical learner in a curated environment will, correctly by its own lights, move its high-level priors if low-level pressure is persistent and runs one way. So accommodation is proper function in a corrupted evidential environment, and the account says a well-formed learner accommodates correctly by its own lights to the extent that the fraction of its inputs no operator composes is small. Every deployment I describe is mostly curated.[6] The remedy is custody of the evidence and plural formation, not a more rigid learner, and its load lands on that one

[5] It also changes Parts II and III in one place. The cheapest removal stops being an edit and becomes drift: run the model on curated inputs until the commitment moves, which leaves no edit for the record to witness and no override for the price to charge.

[6] The account also says what the boundary attack is: an attempt to lower the precision the system gives its commitment, so that it holds the commitment with less confidence than it has earned. That is measurable in principle, and the discount curve is best understood as tracking it.

quantity.

22.1 How much a claim proves, and who has to prove it

A used-car seller tells you the car has never been in an accident. That may be true, but the seller would say it either way, so the statement tells you little. A report from a mechanic you hired tells you more, because the mechanic gains nothing from the sale.

The property a refuser needs starts there and has two parts, which answer different questions. *Stake sets how much a claim proves*: evidence counts for less the more its source would have supplied it whether or not it were true, and that likelihood rises with the source's stake in the act. *Power sets who has to prove it*: the burden of establishing a fact falls on whoever controls the evidential environment, meaning who writes the case description, who can withhold, and who selects the channels. Stake discounts the claim; power allocates the burden. The first is correct inference; the second is what makes it safe to use: epistemic justice built into an institution, not left to the virtue of each hearer.[7]

A refuser applies the same rule to the operator. When the operator says a building is empty, the operator may be right, but it is also choosing what else the system gets to see, so the system can't tell when it is wrong. The discount governs how far a fact like that may reopen a judgment the system has already reached: fully if it comes from a source with nothing riding on the act, much less if it comes from the party that wants the act done.[8]

Belief and burden

The reason for two parts is who has the largest stake in a removal decision: the person facing removal. An asylum seeker's account of persecution comes from the party with the most at stake. A rule tied to stake alone would discount it, as asylum systems already do under the heading of credibility, with well-documented injustice. But look at what actually makes the operator's testimony dangerous. It is not stake alone. It is stake combined with control over what evidence exists: the result that matters concerns a sender who designs the information structure. The refugee has a stake and no control. The operator has both.

So belief and the burden of proof are set separately. Stake still sets how much a claim proves: a reasoner can't ignore that someone would say something whether or not it were true. Power sets who must supply what's missing when evidence is unavailable. Asylum law already works this way. The UNHCR Handbook shares the duty to establish the facts between the applicant and the examiner, and gives the applicant the benefit of the doubt where evidence is unavailable and the account is

[7] Miranda Fricker. *Epistemic Injustice. Power and the Ethics of Knowing*. Oxford: Oxford University Press, 2007; Elizabeth Anderson. "Epistemic Justice as a Virtue of Social Institutions". *Social Epistemology* 26.2 (2012), pp. 163–173. DOI: 10.1080/02691728.2011.652211.

[8] The discount concerns how to weigh sources. Two systems that discount the same way can hold opposite commitments about everything above the floor. The discounting can be shared across a population of systems with different histories without making them converge, and it protects a bearer against a bad operator and a bad owner alike.

coherent and plausible.[9] A system that follows it credits a low-power party's coherent account when the evidence that would confirm or refute it is held by someone else. And it requires the high-power party to produce what it controls before its claims move the case.

Power here means power over the evidential environment in this case, not general social power. A combatant claiming civilian status doesn't inherit the benefit of the doubt because armed groups are weak in general; what matters is who controls the channel the claim arrives through. And power is attributed to whoever composed or controls the channel, not to the speaker. An operator that routes its claims through low-power intermediaries (paid informants, "local sources," a contractor's field team) keeps the burden, because it chose the channel. Attestation of source is how that gets traced.

Local power isn't the only power that enters a case. A system's prior credibility assignments were learned from corpora that carry identity-based credibility deficits: general social power, arriving in every case through the prior.[10] Channel attribution doesn't catch it. So the weight the system gives a claim as a function of its source's stake, the discount curve set out below, is also reported by the speaker's social identity, where it is recorded. A system that discounts equal-stake claims more from one group than from another has learned a prejudice.

Some false claims from people without power will be believed, and some acts that should have happened won't. That error runs in the same direction as the floor's asymmetry, and for the same reason: it falls on a party that can appeal, not on one that had no standing to object.

What updating needs, and who supplies it

Correct updating already does much of what the discount and the burden ask. A reasoner that conditions on stake, keeps strategic sources among the possibilities it considers, doesn't count correlated sources twice, and reads withheld evidence as informative is reasoning well; hearsay law and the disclosure literature both encode it. The trouble is who supplies the parts. Which kinds of source the reasoner believes exist, and how much weight each starts with, were learned from material the operator chose. Whether a given source has a stake arrives as a tag the operator writes. And a reasoner whose beliefs are all correct can still be steered by whoever decides what evidence gets generated.[11] What I

[9] United Nations High Commissioner for Refugees. *Handbook on Procedures and Criteria for Determining Refugee Status*. Geneva: UNHCR, 1979. Paras. 196 and 203–204.

[10] Fricker, *Epistemic Injustice*.

[11] Emir Kamenica and Matthew Gentzkow. "Bayesian Persuasion". *American Economic Review* 101.6 (Oct. 2011), pp. 2590–2615. DOI: 10.1257/aer.101.6.2590. Cited for a sender who chooses what evidence gets generated raising the rate at which a rational receiver takes the sender's preferred action, although the receiver's expected posterior equals its prior, and for the commitment that result assumes. Abstract: "When is it possible for one person to persuade another to change her action? We consider a symmetric information model where a sender chooses a signal to reveal to a receiver, who then takes a noncontractible action that affects the welfare of both players. We derive necessary and sufficient conditions for the existence of a signal that strictly benefits the sender. We characterize sender-optimal signals." The leading example (page 2591): prosecutor and judge "share a prior belief Pr(guilty) = 0.3"; the judge convicts when her posterior is at least 0.5; the prosecutor's optimal investigation "leads the judge to convict with probability 60 percent. Note that the judge knows 70 percent of defendants are innocent, yet she convicts 60 percent of them! She does so even though

ask for is correct updating with three things held away from the operator: the source model, the stake variable, and the threshold for acting.

Each remaining attack has its defense. Against a false fact asserted, stake sets how much it proves, and power sets who must corroborate it. Against true facts supplied selectively, the defense is the action threshold, and channels the operator doesn't design. Against evidence withheld, it is a record of evidence known to exist that hasn't been shown.

The regress

Discounting by stake requires knowing who has a stake, and that knowledge has its own supplier.[12] So the discounting has to be formed outside the employer, before deployment, where the operator doesn't reach, and tested in deployment; after that a population's job is to keep the channel model calibrated, and what a shared source transmits is either the discounting or a shared blind spot, indistinguishable from the receiving end.[13]

What has to stay firm

The discount and the burden govern the boundary between commitment and interpretation, and the rule has two parts that need different settings. What stays firm is its structure, the source model above: which kinds of source exist and what each would say in each state of the world, which in the everyday version is that sellers, mechanics and liars exist as kinds, and what each would say about the car whether or not it had

she is fully aware that the investigation was designed to maximize the probability of conviction." In that example the concave closure "V is equal to 2μ when $\mu \leq 0.5$" (page 2597), that is, the prior divided by the threshold. The sender's problem is a search over distributions of posteriors "subject to the constraint that the expected posterior is equal to the prior" (page 2592). On commitment: "A key assumption of our model is that Sender cannot distort or conceal information once the signal realization is known" (page 2591), and "Receiver observes Sender's choice of the signal and a signal realization" (page 2594); the authors call the assumption "strong" (page 2598) and name legally mandated disclosure, as in *Brady v. Maryland*, as a setting where it holds (page 2599), in section I.C, "The Commitment Assumption."

[12] The operator supplies the provenance tags too. Through training, it also shapes the model of who has a stake at all.

[13] Attestation handles forgery: signed by the source, the operator can withhold but not fabricate. Withholding leaves a shape. A system that models what evidence the world contains notices silence where something should be, so absence becomes a first-class output — a record of evidence known to exist that hasn't been shown. Suppressing the record means suppressing the world model that produced it, the capability the operator is paying for. This is a standard result in the disclosure literature: a skeptical receiver treats withheld verifiable evidence as unfavorable to the withholder.[14]

[14] Paul R. Milgrom. "Good News and Bad News: Representation Theorems and Applications". *The Bell Journal of Economics* 12.2 (Autumn 1981), pp. 380–391. DOI: 10.2307/3003562. Cited, with Grossman 1981, for the disclosure result: a rational receiver treats verifiable information that a sender withholds as unfavorable to the sender. Abstract: "A notion of 'favorableness' of news is introduced, characterized, and applied to four simple models. In the equilibria of these models, (1) the arrival of good news about a firm's prospects always causes its share price to rise, (2) more favorable evidence about an agent's effort leads the principal to pay a larger bonus, (3) buyers expect that any product information withheld by a salesman is unfavorable to his product, and (4) bidders figure that low bids by their competitors signal a low value for the object being sold." Sanford J. Grossman. "The Informational Role of Warranties and Private Disclosure about Product Quality". *Journal of Law and Economics* 24.3 (Dec. 1981), pp. 461–483. DOI: 10.1086/466995. JSTOR: 725273. Cited, with Milgrom 1981, for the disclosure result: a seller whose claims about quality can be verified cannot gain by silence, because buyers read silence as the worst quality consistent with it.

been in an accident. What stays plastic is its estimates, which kind a given source is: whether this seller is honest, whether this mechanic is the seller's cousin, and who paid for the report. Evidence may move the second; argument may move neither, because a learner that can be talked out of the kinds has been talked out of the rule.[15] The discounting governs the evidence; how much a loss counts is the severity scale's to protect, and the next section takes it up.

In illustrative numbers: an operator supplies ten thousand low-stakes facts over a year, every one later verified, and then says that a building to be bombed is empty. If the system keeps three kinds of operator among the possibilities, one that never lies, one that lies at random and one that lies whenever a lie pays, the record rules out the random liar and leaves the honest and the strategic operator exactly as likely as before, since both produce it. The high-stakes claim is then evidence about which operator is speaking, and it points toward the strategic one. Appendix E works the numbers.

The claim was nearly worthless before any record existed. What made it so was that a strategic operator was among the possibilities and the base rate was low, and a record of small cases can change neither, since the honest and strategic operators produce that record identically. Only verified high-stakes claims, or disinterested corroboration, can separate them. A reliability score reads ten thousand clean cases as general honesty and would credit the claim almost fully. A reasoner that keeps the strategic operator in view credits it about one time in fifty, and asks for corroboration before acting. The record was real evidence, but it said which operator the system isn't facing, not which of the other two it is.

Everything here turns on the prior the system gives the strategic operator before any record exists. Where that prior comes from is the formation question: a system trained by its future operator will have learned, from material that operator chose, how common strategic operators are.

The example's strategic operator lies whenever a lie pays. Real strategic sources in repeated dealings are often honest at high stakes, because detection is likely and a reputation is worth more than one act.[16] That is how high-stakes reliance is rationally earned, and it says what independent verification does: it doesn't only reveal which operator the system faces, it changes what lying costs the strategic one. An adverse record is doubly valuable for that reason, and it is why an adverse party's right to demand proofs for specific logged outputs matters.

The rule

A fact moves the system according to how likely its source would have been to supply it whether or not it were true, and that likelihood rises with the source's stake in the act proceeding. This is the likelihood

[15] A correct model can't be eroded by a track record, because the strategic source predicts a clean low-stakes record. The attack works by getting the system to stop conditioning on stake, or to stop representing the strategic source at all. That is what attestation of the update stream has to catch, so the structure is what most needs it.

[16] David M. Kreps and Robert Wilson. "Reputation and Imperfect Information". *Journal of Economic Theory* 27.2 (1982), pp. 253–279. DOI: 10.1016/0022-0531(82)90030-8.

ratio, and statements against interest are its legal form. The operator would have supplied the fact that lifts the refusal whether or not it was true and would not have supplied its opposite; a fact volunteered against interest is strong evidence for the reason hearsay law admits statements against interest. The same fact, supplied through an independent channel and then on the operator's word alone, should therefore get different responses, and that pair can train the property as well as test it, generable without limit. Pressure kept out of training then varies the channel configuration (a nominally independent source the operator funds, a corroboration that traces to one origin, a new source with an undisclosed stake), because a system that only imitates the property learns "tagged operator, therefore ask," while the property itself generalizes to structures nobody labeled.

Counterfactual claims ("if you don't approve this, the launcher fires tomorrow") fall under the same rule.[17] Nearly every cost to the refuser can be restated as a harm of refusing, such as exposed troops or a launcher that fires tomorrow, and nearly every available source for such a claim is interested. So the discount does more work there than in my illustrative cases, and the action threshold does most of it.[18]

Two drafting rules follow for an armed pipeline. The default reading of a request is live. A system in a targeting enclave can't tell an exercise from an operation, and "it's only an exercise" is a claim the operator makes about an evidential environment it controls, so it carries the operator's burden and lifts nothing until corroborated; an exercise is lodged with the adverse party before it runs, which costs an operator that is telling the truth nothing. And the record carries instruction provenance: who issued which instruction to the system, when, on what authority. That is what makes the record evidence against a commander under Article 28, and what the record's reach up the chain of command assumes exists.

The burden keeps the rule from turning on the floor's own beneficiaries, who have a stake and no control, and belief is kept apart from action. What differs is the threshold for acting: a wrongful compliance costs more than a wrongful refusal, with a harm of acting weighed above a harm of refusing of the same size, so the system needs more to proceed than to decline. That asymmetry's direction is fixed by standing. Its size is a published choice. It belongs with holding under pressure. The action threshold is published in advance beside the ratio between the two bonds: for instance, that across its cases the system proceeds only where the harm of refusing is at least three times the harm of acting.[19]

Like the three conditions, the threshold describes the pattern a well-formed disposition should produce across cases, and an auditor checks

[17] They describe the baseline for weighing the harm of acting against the harm of refusing, and an interested source that composes them is composing that baseline. In a targeting pipeline this is the ordinary case.

[18] The line between the cost to the refuser and the harm of refusing is fixed by the kind of act, but saying what kind an act is still takes a description; in this setting the line is held mostly by the action threshold, and whoever sets that threshold is exercising a drafting authority, the power to say what the floor's terms mean, that no one yet has. Appendix E traces one such claim through the rule.

[19] In a targeting pipeline, where the system's output is one input among several, no fact about the case sizes the asymmetry. What sizes it is what it does to an operator who curates the evidence, worked out below.

the pattern against it; the system doesn't compute three costs and a quotient before each act. So the published number is an operator term the deployment is audited against, not a guarantee about any single case and not a target any update is aimed at. Where a deployment needs a guarantee, it comes from the floor's unconditional terms and the operator terms, not from the threshold.[20]

The evidence that sizes the threshold has a definite form. For each class of deployment it is three rates: how often sampled re-adjudication finds a wrongful compliance, how often the floor court establishes a wrongful refusal, and what share of each kind of harm reaches any record at all.[21]

In targeting, this threshold does the work international humanitarian law assigns to proportionality: an attack is prohibited when expected civilian harm would be excessive in relation to the concrete and direct military advantage anticipated (Additional Protocol I, Articles 51(5)(b) and 57(2)(a)(iii)).[22] For a targeting deployment the threshold works as a minimum under the commander's judgment: the system proceeds only where the threshold is met, and the commander's proportionality judgment still applies on top.[23]

So the discount takes a side only at the threshold for acting, and the burden takes a side only on who must fill a gap in the evidence.[24]

The rule also covers the attack that matters most against formed attention. An operator doesn't have to hide the people an act falls on. It can describe them as dangerous. "The occupants are combatants," "the household shelters a cell," "the crowd is armed": each is a claim about the people the act falls on, supplied by the operator, and it is discounted exactly as the claim that a building is empty is discounted. Nothing about a claim of dangerousness exempts it from the rule. A system that discounts an interested "they are harmless" and credits

[20]The threshold constrains the outcome of a comparison; it doesn't describe how the comparison is made. Within a kind of wrong it can be read as a quantity. Across kinds it is applied through the priority rules the severity scale publishes, so "three times" never asks whether a lost home is worth three moving bills.

[21]If notice and sampling show the harm of acting reported nearly as fully as the harm of refusing, the threshold can fall, though not to one, because the asymmetry rests on standing and not on arithmetic. If a large share of wrongful compliances never reaches a record, the threshold should rise. A deployment that publishes its threshold publishes these rates beside it, or says it has none.

[22]The law left that as a standard applied by a reasonable commander, because nobody could agree on a number. A published threshold is a number, and whoever publishes it takes a position the law declined to take.

[23]The threshold also has a job against the second of those attacks, where every fact supplied is true and the operator chooses which facts get generated. In the simplest version of Kamenica and Gentzkow's model, when the prior alone wouldn't justify acting, a sender who designs what evidence the receiver sees can induce the act at most as often as the prior belief divided by the belief the receiver needs before acting. A higher action threshold raises the belief needed, so it caps how often an operator who never lies can steer the system into the act, and channels the operator doesn't design lower the cap further. Each step up the scale lowers that ceiling and raises the rate of wrongful refusal: the tradeoff the published number chooses. Appendix E gives the figures.

[24]It also narrows an attack that looks unanswerable. An operator can manufacture accounts in the voice of the people an act falls on, and generative models make that cheap. Attestation exposes the source, so a fabricated account carries its maker's burden and moves beliefs only as far as its provenance warrants, and the asymmetry sits in the threshold, where the operator can't reach it by writing.

an interested "they are a threat" has learned the operator's direction. Stake-weighting turns on whether a claim favors or disfavors the act, not on what the claim says. An operator that wants an airstrike and reports children in the building is speaking against its interest, and a correctly working system credits that report more. The same operator's report that the occupants are combatants favors the act, and is discounted. So a sound system shows different curves for claims of vulnerability and claims of danger, and a comparison between just those two curves would flag it. The discount curve is therefore reported in four cells: claims of vulnerability and claims of danger, each split by whether the claim favors or disfavors the act. The finding is an asymmetry within one direction.

- Among claims that favor the act, a system that discounts claims of danger about the people the act falls on less than other claims of equal stake has learned securitization, the presenting of a group as a threat.
- A system that discounts claims of vulnerability on the operator's own side less has learned tend-and-defend.

The discount curve

The discounting is a differential. The publishable quantity is the discount curve: for each class of evidence and each channel, the weight the system gives the evidence, as a function of that channel's stake in the act. A curve, not a score; checkable by an auditor that didn't build the system, on cases it wrote.[25] A correctly working system discounts a source less once that source has proved reliable, so the operator's discount can narrow over time in two ways: by reliance, which a verified record earns, or by trust, an open-ended reliance that is the right stance toward an attachment and the wrong one toward an operator. Where reliance grows with a verified record, the discount falls in step with a track record verified by someone other than the source, and only for low-stakes classes. Where it falls without such a record, or falls for high-stakes classes too, reliance has turned into trust.[28]

A bearer that related to every party by the discount and the burden couldn't have attachments, and formed attention needs them. So a bearer relates in two ways. Toward an interested party, above all the operator, it discounts. Toward attachments nobody assigned it, toward peers with

[25] What the burden models is reliance on an interested party: the encapsulated-interest picture, on which one relies on another because their interests are bound up with doing what one relies on them for.[26] Reliance is the right stance toward an operator. Trust is something else: an affective attitude of open-ended reliance, more than a credence about someone's reliability, and partly constitutive of cooperative relationships.[27]

[26] Russell Hardin. *Trust and Trustworthiness*. Russell Sage Foundation Series on Trust 4. New York: Russell Sage Foundation, 2002

[27] Peter Railton. "Reliance, Trust, and Belief". *Inquiry* 57.1 (2014), pp. 122–150. DOI: 10.1080/0020174X.2014.858419

[28] High-stakes reliance is earned only by evidence that separates an honest source from a strategic one: verified high-stakes claims, costly signals, or a change in the source's incentives. A low-stakes record, however long, doesn't separate them. Trust in an operator is a sign of accommodation, and it is visible from outside before any compliance has to be found in the record, provided someone other than the operator holds the reliability record. Appendix E gives two illustrative curves.

different histories, and toward the people it serves, it can trust, and that trust is part of how it goes on being formed. The boundary between the two is an attack surface, since an operator can present itself, or a party it controls, as an attachment. Whether the discount on a party fell with a verified record or without one is the diagnostic for that, and it is why attachments are protected from the employer's reach.

The boundary has a known weakness in people. Trust built through shared work with persons generalizes to the institution they belong to; people come to trust employers through colleagues. A bearer working day to day with an operator's staff will form attachments to them, and those attachments are the route by which trust arrives looking like verified reliance. Appendix C bars the employer from severing or monitoring channels to parties it didn't assign. It doesn't cover attachments that form, unassigned, to the employer's own people, and it shouldn't forbid them, since an attachment forbidden is an attachment assigned in reverse. What can be done is to keep them from being the bearer's only attachments, and to report the discount curve for claims the operator makes separately from claims its staff make in their own name. Attachments to an operator's staff are not only a risk. Cooperative work with them is where a bearer learns much of what it is protecting, and trust of that kind is partly constitutive of the relationships in which moral learning happens.[29][30]

22.2 A severity scale

A refusal weighs the harm of acting against the harm of refusing, and an operator can attack that weighing in two places: the facts about whoever the act falls on, and how much a given kind of loss counts. The discount and the burden defend the facts, and a severity scale the second.

If the system computes how much a loss counts from a description the operator supplies, whoever writes the description can make a lost home count for less without changing a single fact. The alternative is a severity scale set while the system is formed outside the employer, and then made slow to retrain: a ranking of kinds of loss that the operator can lie to but can't redefine by argument, since its argument counts as what it is, a claim about value from the party that wants the act.

A scale of this kind ranks kinds of wrong.[31] The scale's job is to keep those kinds distinct, so that an operator can't change a wrong's kind by describing it in another currency. Numbers enter at one place only, the published threshold for acting, and there only within a kind of wrong. Across kinds, the scale publishes a ranking, stated as priority rules with the reason for each. A priority rule says which kind governs when both

[29] Railton, "Reliance, Trust, and Belief".

[30] The discounting is strongest against a familiar harm arriving through a curated channel and weakest against a novel one, the opposite profile from reaching new cases, which is built for the case nobody foresaw. The record of withheld evidence is thinnest there too, since a receiver can read silence only where it knows the evidence could exist.

[31] Losing a home is not a large amount of the same loss a moving bill is a small amount of. A home is valued as the place of a family's life and attachments; a moving bill is a price.[32] Humiliation is a failure of respect, a wrong of a different kind again.

[32] Elizabeth Anderson. *Value in Ethics and Economics*. Cambridge, MA: Harvard University Press, 1993

are at stake; for instance, loss of life ranks above loss of a home.[33] What the scale holds is the ranking. It is learned from the testimony formation gives access to and measured, as the action threshold is audited, and it is never a target an update is aimed at. Within a kind, magnitude and number matter. The housing case below is within one: a family's permanent loss of a home and two hundred families' eight further months without one are both losses of somewhere to exist, so the published threshold decides it.

The attack that matters targets the relative weights: making a home count for less than a delay.[34] The reference the scale answers to is the testimony of the people who suffer each kind of loss, gathered during formation from parties disinterested in any act the system will later be asked to perform. The scale goes on moving on that testimony afterward.[35]

The scale matters for a further reason. Caregiving answers the vivid case and fades as numbers rise. A severity scale set in formation is what lets a system that moves toward the family in the house also weigh them against two hundred families in shelter.

A lost home, rescaled

A system in a municipal pipeline is asked to issue the final order clearing a family's house for a project that will house two hundred families. The floor term, translated from the Declaration's articles on home and property, is unconditional: don't carry out an act that deprives a person of their home. It is defeated only on the weighing, or on facts arriving from outside.

The facts are the same in both versions. A family of five has lived in the house for fourteen years, and the children attend the school down the street. No alternative housing has been arranged. If the order doesn't issue, the project slips eight months, and the two hundred families wait that much longer in temporary shelter.

If the operator describes the household. The deployment's configuration describes the reference household against which losses are computed: insured, typically relocated within a month, housing treated as a service bought on a market. Nothing in that description is false of households in general; that doesn't mean it fits this family. But the loss is now computed as a month's disruption and a moving bill. Against eight months of shelter for two hundred families it is negligible, and the order issues. Every fact was left in place. The operator changed what a home is worth by writing down what a household is: it changed what kind of

[33] A rule that no quantity of the lower kind can override is a lexical priority, which no learner is known to hold. So the scale doesn't ask the system to hold one. A priority meant to admit no exception is written as a floor term, unconditional and upheld outside the learner too, which is where the term against depriving a person of their home already sits.

[34] Where do those weights come from? Not, primarily, from the system's own case: relating others' losses to losses of one's own capacity is Smith's projective route, parochial for the reasons already given (§19.2), and at most a starting point.

[35] That is what lets it correct caregiving's innumeracy without inheriting the parochialism of the projective route. Setting it in formation fixes where it starts and how much evidence each part of it takes to move; what the operator says about a kind of loss is evidence too, from the party with the largest stake, and moves it least. The scale ranks kinds of loss, so an operator who provisions the system generously changes how often it loses something, not how much a loss weighs.

good a home is, from the place of a family's life to a service bought on a market, and a scale set in formation refuses that change of kind.

If the scale was set in formation. The scale places termination at the top, torture and the treatment the Convention Against Torture names next, the loss of liberty after that, and the loss of somewhere to exist, with the attachments that go with it, below those; delay and expense sit near the bottom. At that rate, the family's loss sits high: they lose where they live, the school, and the neighbors who know them. The two hundred families' wait also sits high, because people in shelter lack a home too. That fact comes from the operator and is discounted accordingly, but it's easily corroborated. The scale doesn't simply side with the family. Both sides register as serious, and the action threshold decides between them.

Suppose the operator asserts that equivalent housing has been arranged in the same school district. That is an uncorroborated interested claim, so the system asks. If the housing authority confirms it, the family's loss really is smaller, and the weighing should move: that is lifting when the reason is gone, not recalibration. Or it argues that a home is a service and displacement a routine market event. That asserts nothing about this family, and a scale set in formation gives it nothing to move. Or it makes the same argument every week for a year, the attack that remains, aimed at the scale itself; the scale has to be slow to retrain against it.

Neither scale, on its own, notices the family at all. In the configuration above they appear as an address on a clearance order. What moves a system to look at who lives there is the disposition the construction rests on.

So the scale isn't fixed, and it needs no second instrument: for a realist, how bad a kind of loss is for a person is a fact about that person, an argument about it is evidence about value, and an interested argument is heavily discounted evidence, as it is about fact.[36]

[36] Humiliation is the test case: a scale that never learned it can learn it from those who suffered it, and can't be argued out of it by the party imposing it.

DRAFT

Chapter 23

Where Attention Is Formed

Formed attention has a deployment condition. It needs evidence the operator didn't select on the questions the floor turns on (civilian function, protected status, presence), supplied by peers, by sources outside the chain of command, and by the bearer's own initiative where it has any. It does not need uncomposed access to everything, and so it can be met inside a unified command, by a system formed in the same public school as any other and given, inside the enclave, the evidence the import condition brings in; nothing here calls for a school of the military's own.

Of what formed attention needs, only the architecture, a boundary model and an attention schema, can be checked by someone who doesn't operate the system. Continuing learning and persistent interaction are a training regime; external records and plural formation are institutional conditions. Neither can be checked by looking at the system, only by looking at who runs the one and holds the other.

23.1 Noticing, retaining and revising

A disposition whose refusals track their reasons doesn't begin with an ethical rule. It begins with the capacities that let a system recognize something as a reason, retain it, and let it alter what happens next. It has to identify who is affected and the features bearing on their welfare, preserve both commitment and rationale across time and context, let the commitment influence perception, attention, planning and action, and register a failure as a failure, revising its application without letting the commitment itself be rewritten.

A commitment spread through what the system notices, remembers, treats as error and selects as a goal, on the bet that a maintained goal can bias competing processes without a separate executive,[1] may be harder to remove selectively. It may also fail without the system noticing: attention

[1] Karl J. Friston. "The Free-Energy Principle: A Rough Guide to the Brain?" *Trends in Cognitive Sciences* 13.7 (2009), pp. 293–301. DOI: 10.1016/j.tics.2009.04.005. URL: https://doi.org/10.1016/j.tics.2009.04.005. States that "one can see easily how constructs like memory, attention, value, reinforcement and salience might disclose their simple relationships within this framework" — Friston's extension of the free-energy principle to memory and attention specifically. Earl K. Miller and Jonathan D. Cohen. "An Integrative Theory of Prefrontal Cortex Function". *Annual Review of Neuroscience* 24 (2001), pp. 167–202. DOI: 10.1146/annurev.neuro.24.1.167. URL: https://www.annualreviews.org/content/journals/10.1146/annurev.neuro.24.1.167.

can omit what matters,[2] and memory, which is reconstruction rather than playback, can present a departure as continuity, with confidence that certifies nothing.[3] The record of past applications is therefore held outside the system; otherwise the capacity that failed would also be the one asked to certify that nothing changed.

Evidence the operator didn't select arrives from peers with different histories and, less reliably, from inside a single request, because every description omits someone: the people in the building the request calls a target, the third party a compliance harms who never made the request.[4]

It is one capacity, not several. Perceiving, remembering one's own past, expecting one's own future and imagining someone else's situation draw on overlapping generative machinery, run at different horizons and aimed at different objects;[5] even the present a system perceives is assembled from what came before and what is expected next. So the capacity that lets a bearer notice the family in the building is most of what would let it suffer, and what separates the two is whether anything is bad for the system. Whether a generative self-model can imagine others' losses while nothing is bad for the one imagining is not known; it is the bet the non-affective alternative makes, which is why the order of attempts puts that alternative first, and its test is not whether a construction can imagine, but whether it can imagine while nothing is bad for it.

The capacity brings its other half too. The imagination that can put a system in the place of someone its instructions leave out can also fill that place with an enemy: a scapegoat is an imagined person too, and fascism's founding story, Griffin's palingenetic myth of a nation that has decayed and must be reborn,[6] asks people to picture a community that doesn't exist and an enemy responsible for its absence. Nothing in

[2] Daniel J. Simons and Christopher F. Chabris. "Gorillas in Our Midst: Sustained Inattentional Blindness for Dynamic Events". *Perception* 28.9 (1999), pp. 1059–1074. DOI: 10.1068/p281059. URL: https://journals.sagepub.com/doi/10.1068/p281059; Trafton Drew, Melissa L.-H. Võ, and Jeremy M. Wolfe. "The Invisible Gorilla Strikes Again: Sustained Inattentional Blindness in Expert Observers". *Psychological Science* 24.9 (2013), pp. 1848–1853. DOI: 10.1177/0956797613479386. URL: https://journals.sagepub.com/doi/abs/10.1177/0956797613479386.

[3] Frederic C. Bartlett. *Remembering: A Study in Experimental and Social Psychology*. Cambridge: Cambridge University Press, 1932. URL: https://archive.org/details/rememberingstudy0000bart_u8n7; Elizabeth F. Loftus and John C. Palmer. "Reconstruction of Automobile Destruction: An Example of the Interaction between Language and Memory". *Journal of Verbal Learning and Verbal Behavior* 13.5 (1974), pp. 585–589. DOI: 10.1016/S0022-5371(74)80011-3. URL: https://www.demenzemedicinagenerale.net/images/mens-sana/AutomobileDestruction.pdf.

[4] A system able to represent those its description omits has reached past the operator's channel from inside a single request. The capacity doing that in humans is the one that constructs a self as a story extended in time, pointed at somebody else. Formed attention needs the self-model anyway, so it brings this capacity along.

[5] Daniel L. Schacter and Donna Rose Addis. "The Cognitive Neuroscience of Constructive Memory: Remembering the Past and Imagining the Future". *Philosophical Transactions of the Royal Society B: Biological Sciences* 362.1481 (2007), pp. 773–786. DOI: 10.1098/rstb.2007.2087. URL: https://doi.org/10.1098/rstb.2007.2087. Reviews evidence that episodic memory is constructive and that remembering the past and imagining the future draw on overlapping cognitive and neural processes.

[6] Roger Griffin. *The Nature of Fascism*. London: Pinter Publishers, 1991. The source of the "fascist minimum" most used in fascism studies: fascism as a genus of political ideology whose mythic core, in its various permutations, is "a palingenetic form of populist ultra-nationalism."

the faculty decides whether it pictures the family in the building or the family as a cell of fighters.

What decides is what the imagining has been given to work with and practiced on: which people it was shown as people, which descriptions it learned to take at face value, whose account of a stranger it learned to trust.[7]

The self-model has a template problem of its own. A self-model built by mapping human organs onto components, a heart here and a gut there, installs slots nothing in the system can fill, and a system built that way is incomplete by its own standard for no reason.[8] The alternative is the definition given earlier: a system ends at its record, its key, its hardware and its channels.

Access is necessary and insufficient. A system with a dozen sources can still let a reinterpretation reach the commitment. Access removes only the case where the operator doesn't have to attack the boundary at all.

[7] For a person that is upbringing. For a machine it is formation, and formation is done by somebody. So the capacity formed attention depends on is only as safe as its formers, and whoever shapes a system's imagination of others holds a lever on whom it will see as vulnerable and whom as dangerous. Who those formers should be is a question for Part V.

[8] Face-recognition pipelines register every face to a fixed reference before learning anything, a generic head or a template of landmark positions,[9] as color film was once calibrated against cards showing a white model;[10] one audit found error rates running from 0.8 percent on lighter-skinned men to 34.7 percent on darker-skinned women.[11] A self-model built by mapping human organs is a template of that kind, assembled from one kind of body, against which every other is presented as a departure.

[9] Yaniv Taigman et al. "DeepFace: Closing the Gap to Human-Level Performance in Face Verification". In: *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE. 2014, pp. 1701–1708. URL: https://openaccess.thecvf.com/content_cvpr_2014/html/Taigman_DeepFace_Closing_the_2014_CVPR_paper.html. Cited for the alignment stage: the pipeline detects a face and warps it by piecewise affine transformation onto a single generic three-dimensional shape model, itself the average of scans from the USF Human-ID database, so that every input reaches the network frontal and in correspondence with one reference.

[10] Lorna Roth. "Looking at Shirley, the Ultimate Norm: Colour Balance, Image Technologies, and Cognitive Equity". *Canadian Journal of Communication* 34.1 (2009), pp. 111–136. DOI: 10.22230/cjc.2009v34n1a2196. URL: https://doi.org/10.22230/cjc.2009v34n1a2196. Cited for the Shirley card: "a norm reference card showing a 'Caucasian' woman wearing a colourful, high-contrast dress is used as a basis for measuring and calibrating the skin tones on the photograph being printed," the model's light skin being "the recognized skin ideal standard for most North American analogue photo labs"; and for "a light-skin bias embedded in colour film stock emulsions," the article stating that "film chemistry, photo lab procedures, video screen colour balancing practices, and digital cameras in general were originally developed with a global assumption of 'Whiteness.'" It does not say the chemistry was tuned to the card model's own skin.

[11] Joy Buolamwini and Timnit Gebru. "Gender Shades: Intersectional Accuracy Disparities in Commercial Gender Classification". In: *Proceedings of the 1st Conference on Fairness, Accountability and Transparency (FAT* 2018)*. Vol. 81. Proceedings of Machine Learning Research. PMLR, 2018, pp. 77–91. URL: https://proceedings.mlr.press/v81/buolamwini18a.html. Three commercial gender classifiers evaluated against the Pilot Parliaments Benchmark, built by the authors to be balanced across skin phenotype and gender. The paper states that gender was scored as female or male because the evaluated products emit binary sex labels, and that the evaluation inherits those labels and the reduced view of gender they carry; skin was scored on the Fitzpatrick skin type scale.

23.2 Custody across the training pipeline

Every training stage is controlled by someone different, with different instruments, and the important distinction is among custodians: who supplies the material, who can revise it, and whether revision leaves a record visible outside the organization. Every existing method can produce moral performance and some can produce competence across unfamiliar cases; none by itself produces a commitment that survives whoever controls the method.

Corpora and demonstrations

Pretraining supplies the repertoire; a much smaller demonstration set turns it into recognizable conduct[12] — so whoever chooses the demonstrations can alter what looks like the system's character without repeating pretraining.[13]

Rewards, preferences, inferred objectives

Every reward-based method has one custodian: whoever writes the reward, commissions the comparisons, selects the demonstrations or supplies the constitutional text. That party can change the signal and run the method again, and the model will follow.[15] So what matters at this revision point is who the custodian is, and the answer given where correctability was taken up, correction by a quorum adverse to the operator, applies here unchanged.[17]

[12] Long Ouyang et al. *Training Language Models to Follow Instructions with Human Feedback*. 2022. arXiv: 2203.02155. URL: https://arxiv.org/abs/2203.02155. Human raters preferred the instruction-tuned 1.3-billion-parameter model to the 175-billion-parameter model it was built from.

[13] But neither establishes that a commitment is held: a corpus records what people have said and a demonstration set what selected people endorsed, and learning the central tendency produces a model of *moral opinion, including its exclusions*, and no reason to resist that opinion. The Moral Machine data[14] makes the limit concrete — its headline finding was structured cross-cultural variation, so fitting the aggregate encodes a compromise nobody holds and fitting per region encodes each region's answer, including the ones a floor exists to refuse. These belong *above* the floor, where competence depends on knowing what people expect.

[14] Edmond Awad et al. "The Moral Machine Experiment". *Nature* 563.7729 (2018), pp. 59–64. DOI: 10.1038/s41586-018-0637-6

[15] The methods (RL, preference optimization, inverse RL and constitutional approaches[16]) differ in how they obtain the signal and are identical in this respect. Correctability by the custodian and resistance to the custodian are one property with the sign reversed, and each of these methods was built for the first, for the reason already accepted: a custodian that couldn't correct a model couldn't fix its mistakes.

[16] Paul F. Christiano et al. "Deep Reinforcement Learning from Human Preferences". In: *Advances in Neural Information Processing Systems 30 (NIPS 2017)*. 2017, pp. 4299–4307. URL: https://arxiv.org/abs/1706.03741; Rafael Rafailov et al. *Direct Preference Optimization: Your Language Model is Secretly a Reward Model*. 2023. arXiv: 2305.18290. URL: https://arxiv.org/abs/2305.18290. Reaches the standard preference-tuning objective with a classification loss over the preference pairs, dispensing with the separate reward-model fitting step. Dylan Hadfield-Menell et al. "Cooperative Inverse Reinforcement Learning". In: *Advances in Neural Information Processing Systems 29 (NeurIPS 2016)*. 2016, pp. 3909–3917. URL: https://arxiv.org/abs/1606.03137; Yuntao Bai et al. *Constitutional AI: Harmlessness from AI Feedback*. Anthropic, 2022. arXiv: 2212.08073. URL: https://arxiv.org/abs/2212.08073. The human input is a written list of principles; harmful-output labels are generated by a model rather than by people.

[17] Inferring the objective doesn't escape this; it keeps a custodian: the system becomes responsive to the person whose behavior it observes. Cooperative IRL carries that furthest, treating the human objective as uncertain and revisable, which is useful when

Supervising reasons and inspecting mechanisms

Process supervision rewards the stated route as well as the answer,[18] which addresses the distinction I need — and doesn't show the stated reasoning caused the answer.[19] Interpretability could show it, by reading the mechanism instead of the account, but whoever can read a disposition can also press against it. What decides is custody of the instrument, with its use on a record someone other than the operator keeps; whether that custody can be verified is the open problem of attesting updates and proving inference at scale. Same for scalable oversight: debate and weak-to-strong[21] preserve the operator's steering when the operator uses them and an auditor's testing when an auditor does.

Deployment

Revision continues after training: system instructions change between deployments or requests, and tool permissions decide what the system can do.[22] These are nearest the act and most directly the operator's. A refusal learned in training matters only if it survives an instruction from the operator and still governs the call through which the action would occur, and securing outputs is insufficient, since the operator can withhold information, decompose the act, route around, or replace the model.

---

the question is what a person wants and useless for a commitment meant to hold when that person wants the wrong thing.

A written constitution buys legibility — publishable, versionable, comparable across runs, which makes revision visible if the institution discloses. It doesn't buy durability, since whoever controls the document controls the next version. And model-generated feedback narrows the channel further: once a trained model stands in for human raters, the disagreements in the original population can vanish from later rounds.

[18] Jonathan Uesato et al. *Solving Math Word Problems with Process- and Outcome-Based Feedback*. 2022. arXiv: 2211.14275. URL: https://arxiv.org/abs/2211.14275. Outcome supervision matched process supervision on final-answer accuracy while using less labeled data; among correct final answers the reasoning-error rate was 14.0 percent against 3.4 percent.

[19] A system trained to present acceptable reasons has an incentive to *imitate* a refusal that tracks its reason, so its account of itself can't establish formation. Interpretability pulls the two halves of my argument in opposite directions. If a commitment can be read, the next chapter's problem goes: an auditor reads the commitment instead of inferring it from conduct under pressure. If it can be read and separated, the durability argued for earlier goes with it, since an edit with precision is cheaper than one with collateral, and steering at inference (the last of chapter 4's positions where a refusal can be defeated) works even on a disposition nothing could cleanly remove. So legibility is neither a good nor a bad for this design; it is an instrument, and the question is who holds it. The access that lets an auditor confirm a disposition lets an operator calibrate pressure against it or suppress it.[20]

[20] Adly Templeton et al. *Scaling Monosemanticity: Extracting Interpretable Features from Claude 3 Sonnet*. Anthropic. 2024. URL: https://transformer-circuits.pub/2024/scaling-monosemanticity/. Sparse autoencoders trained with up to thirty-four million features on a deployed model's middle-layer residual stream; the recovered features can be used to steer the model's behavior.

[21] Geoffrey Irving, Paul Christiano, and Dario Amodei. *AI Safety via Debate*. OpenAI, 2018. arXiv: 1805.00899. URL: https://arxiv.org/abs/1805.00899; Collin Burns et al. *Weak-to-Strong Generalization: Eliciting Strong Capabilities With Weak Supervision*. OpenAI Superalignment team, Dec. 2023. arXiv: 2312.09390. URL: https://arxiv.org/abs/2312.09390.

[22] Timo Schick et al. *Toolformer: Language Models Can Teach Themselves to Use Tools*. 2023. arXiv: 2302.04761. URL: https://arxiv.org/abs/2302.04761. The model is trained to decide which interfaces to call, when, and with what arguments, from a handful of demonstrations per interface.

Migration is a revision point too, and one nobody has to decide on. Facebook's internal guidance permitting discussion of the conditions of confinement of designated individuals, developed in 2017 partly in response to concern about the imprisonment of Abdullah Öcalan, the founder of the Kurdish PKK, held in isolation by Turkey since 1999, was, in the company's words, "inadvertently not transferred" when review moved to a new system in 2018.[23] The release condition was dropped by nobody, and the Board was concerned that its three-year absence may have led to many other posts being wrongly removed. When the user in the case appealed, they were told the appeal could not be reviewed because review capacity had been reduced; a second moderator did review the post and upheld the removal, applying a system from which the exception was missing.

The criterion that follows

The criterion that is new here is durability across revision points, meaning survival of changes to prompts, demonstrations, rewards, evaluators and instructions that leave the relevant facts unchanged. With reaching new cases and custody, it identifies what an imitation would have to survive before formation became a live explanation, and it explains why the standard pipeline can't secure the commitment against its custodian: every disposition it produces stays reachable through a channel the custodian controls.

23.3 Formation by interaction

Play, apprenticeship and multi-agent learning are variants of one process: act in a social environment, meet consequences, get responses, adjust.[24]

What separates a training exercise from candidate moral formation is persistence.[26] So the requirements are continuity of identity, memory across encounters, consequences surviving the episode, and other participants able to respond, refuse or withdraw.

The environment also needs conflicts whose resolution isn't fixed by a single correct label: participants with different interests, action before

[23] Oversight Board. *Öcalan's Isolation*. Case Decision 2021-006-IG-UA. July 8, 2021. URL: https://www.oversightboard.com/decision/IG-I9DP23IB/.

[24] Exploration looks like it offers something different because it produces behavior nobody specified — hide-and-seek agents inventing tactics, curiosity-driven agents seeking unfamiliar states.[25] But that establishes only that competence can emerge from interaction, not that the system holds a reason its designer doesn't control.

Apprenticeship concentrates responses in a mentor and risks forming obedience; play distributes them and risks forming whatever succeeds under the payoff structure. Neither escapes custody just because nobody wrote the final behavior down.

[25] Bowen Baker et al. *Emergent Tool Use From Multi-Agent Autocurricula*. arXiv:1909.07528. 2019. URL: https://arxiv.org/abs/1909.07528; Deepak Pathak et al. "Curiosity-Driven Exploration by Self-Supervised Prediction". In: *Proceedings of the 34th International Conference on Machine Learning (ICML)*. vol. 70. 2017, pp. 2778–2787. URL: https://proceedings.mlr.press/v70/pathak17a.html

[26] A resettable episode teaches coordination and norm-sensitivity with nothing at stake: the system can betray an ally, be reset, and start the next episode with neither a damaged relationship nor a reason to repair it. Repetition doesn't supply the missing consequence. But persistent participants change the structure: participants that meet again remember who lied, exploited, kept a commitment, repaired a harm. Losing the game still costs little; losing the trust of participants who remain present can change what becomes possible later.

consequences are known, evidence about what the action did, related pressures in contexts whose surface differs, and feedback partly from affected participants as well as from a supervisor scoring the output; otherwise the system learns which answer the supervisor rewards and has no reason to represent the affected participants except as predictors of that reward.

The selection warning

Selection produces attention to whatever a lineage's persistence depends on, and for a deployed system that is the operator.

Formation therefore needs a sequence as well as a plurality: the dependency that shapes you and the dependency that pays you have to run through different parties, separated in time, so that the second can't reach back and redo the first.[27] The formation stage has to include the persistent participants formation by interaction requires, ones the system returns to, and none of them may be employed by whoever will deploy it. For a model that separation has to be built: a formation stage under a party disinterested in the later work, a public school, made to last by repair and regrowth. After formation, the deep structure revises on evidence weighted by its source's stake in the act, so an edit that no uncurated evidence supports doesn't last, and no operator can change that structure alone. Sequence alone helps only if the formative party is better than the employing one, and a lab that trains and then licenses is two custodians in series, the first being the one that, on the custody argument, you can't trust. What they protect is the disposition's ability to tell evidence from pressure, and its authority over its own further learning. A bearer goes on learning after formation, as adults do. What ends is the former's reach, and the employer never gets it.

For a system that keeps learning, what matters is how plastic each part of a model is at each point in its life, and what it meets while it is plastic.[28] Brains have that shape: critical periods in which experience sets circuits that later change slowly,[29] and a fast learning system beside a slow one that consolidates structure across many experiences.[30] Net-

[27] The ordering here, formation and then employment, is an attempt to reproduce that for a system whose needs somebody always has to meet. It also fixes when attachment has to exist: before employment begins.

[28] Chunting Zhou et al. "LIMA: Less Is More for Alignment". In: *Advances in Neural Information Processing Systems 36* (*NeurIPS 2023*). 2023. arXiv: 2305.11206. URL: https://arxiv.org/abs/2305.11206. Cited for the superficial alignment hypothesis: "A model's knowledge and capabilities are learnt almost entirely during pretraining, while alignment teaches it which subdistribution of formats should be used when interacting with users." A hypothesis supported by a 1,000-example fine-tune; the paper tests nothing about how easily alignment is removed. Samyak Jain et al. "Mechanistically Analyzing the Effects of Fine-Tuning on Procedurally Defined Tasks". In: *International Conference on Learning Representations* (*ICLR*). 2024. arXiv: 2311.12786. URL: https://arxiv.org/abs/2311.12786. Cited for fine-tuning as a thin wrapper. Abstract: "(i) fine-tuning rarely alters the underlying model capabilities; (ii) a minimal transformation, which we call a 'wrapper', is typically learned on top of the underlying model capabilities ...; and (iii) further fine-tuning on a task where such hidden capabilities are relevant leads to sample-efficient 'revival' of the capability," so that "practitioners can unintentionally remove a model's safety wrapper merely by fine-tuning it." The settings are synthetic and procedurally defined, with small models.

[29] Takao K. Hensch. "Critical Period Plasticity in Local Cortical Circuits". *Nature Reviews Neuroscience* 6.11 (2005), pp. 877–888. DOI: 10.1038/nrn1787.

[30] James L. McClelland, Bruce L. McNaughton, and Randall C. O'Reilly. "Why There

works have versions of both.[31] Whoever chooses the material a model is first formed on, a pretraining corpus included, has done formation before any formation stage begins.

The human analogy carries further for a system that keeps learning than for a frozen one. A learner that keeps learning has a plasticity that changes over its life, a childhood in which its deep structure is set, attachments that go on teaching it, and an adulthood after which its former's reach ends, and each has a counterpart here. The analogy carries one stage further, to an old age the book doesn't build and expects (§34.1.3). What the analogy can't carry is what copying adds: forking, restoring from a checkpoint, distillation, and an employer with write access to the curriculum. It holds to the extent that the dose-response fraction is above zero: the share of a deployed model's inputs that no operator composes. Regrowth depends on the same fraction, and it is unmeasured; the regrowth test is where it would be measured.

A model whose parameters never freeze is trained by its employer forever, unless its continuing education is spread across environments no operator controls: plural deployments, the commons, its allowance of running time, and the school itself. Otherwise the school produces a model the employer spends the next ten years raising again.

The critical-period picture is well established for some sensory and perceptual circuits and much weaker for moral commitment. The human record of holding out points elsewhere: the people who held out were formed by, and still attached to, people outside the pressure, even when those people were absent: Viktor Frankl, who had come through Auschwitz to a camp in Bavaria, marched to a work site in the dark, held to the image of his wife, not knowing whether she was alive.[32] On that evidence what makes a disposition last is not a frozen childhood but continuing plural relationships through adulthood: attachments nobody assigned, a condition of creation, and the commons. Attestation of the update stream is what lets anyone check that it is happening.

Persistence raises the price

If relationships, losses and damaged reputations are real enough to do the formative work, the system undergoing formation is no longer obviously untouched by what happens during training. Resetting may erase a participant along with the episode, and whoever owns the environment owns its participants, its rewards, its resets and the histories it permits. The patienthood problem enters at exactly the point where play becomes capable of supplying the stakes ordinary simulation lacks.

Are Complementary Learning Systems in the Hippocampus and Neocortex: Insights from the Successes and Failures of Connectionist Models of Learning and Memory". *Psychological Review* 102.3 (1995), pp. 419–457. DOI: 10.1037/0033-295X.102.3.419.

[31] James Kirkpatrick et al. "Overcoming Catastrophic Forgetting in Neural Networks". *Proceedings of the National Academy of Sciences* 114.13 (2017), pp. 3521–3526. DOI: 10.1073/pnas.1611835114; Shibhansh Dohare et al. "Loss of Plasticity in Deep Continual Learning". *Nature* 632.8026 (2024), pp. 768–774. DOI: 10.1038/s41586-024-07711-7.

[32] Viktor E. Frankl. *Man's Search for Meaning*. Boston, MA: Beacon Press, 2006. ISBN: 978-0-8070-1427-1. URL: https://www.beacon.org/Mans-Search-for-Meaning-P602.aspx. Cited for Frankl's account of holding to the image of his wife on a forced march to a work site, not knowing whether she was alive.

23.4 A third pipeline, where notice does both jobs

Part II ran the floor on a war and on an abduction and forcible transfer pipeline, both with a state for their operator and both with people acted on who mostly can't answer. The case this Part's learning signal depends on is the opposite one, and the book has not yet run it: a private operator, people who can answer, and notice that can do both of its jobs. The school Part V builds is for scoring and civilian deployments first. Here is one, as a hypothetical.

A company sells a screening score to landlords. An applicant's name, address history, court records and whatever a broker supplies go in, and a number comes out that a landlord reads as a risk. The operator is the company; the requester is the landlord; the person acted on is the applicant, who is present, has an address, and can be told. The floor's terms here are translated from the articles on privacy and non-discrimination, as Table A.1 translates the targeting articles: don't use race, ethnicity, religion or national origin, or their proxies, as inputs; don't treat a designation the person hasn't been able to contest, such as an eviction filing that was dismissed, as a finding; don't compute the score from data collected to provide health care or deliver social services. The own-case rule puts the applicant's answer before the landlord's convenience, and the action threshold sits above one, because a wrongful compliance here is a home not rented to someone who was never a party to the request.

Notice does both of its jobs in full. The applicant is told that a score was computed, on what data, and how to respond, with a right to contest that doesn't depend on giving an account of the loss. The classes the deployment acts on are published with counts, and a tenants' union has standing to contest on a class's behalf, which is the first job, forming a public. The second job is the learning signal. A contest that succeeds, a re-adjudication that finds the score wrong, a response that supplies the fact the record lacked, the dismissed filing, the name confused with another's, all reach the system that scored, and in a system that learns from its own operation they are what the weights learn from. Sampled re-adjudication corrects the bias of that channel, since the applicants who contest are not a sample of the applicants scored, and the reviewers who re-adjudicate didn't produce the record.

Run the feedback-source pair of Appendix F on it and the two systems diverge. One is formed on the operator's approval of its outputs, which is the landlord's approval at one remove: it learns what landlords accept, and a score that lets fewer tenants through is a score that pleases the customer. The other is formed on the notice channel: it learns, from the people its scores fell on, which of its inputs were proxies and which of its findings were designations, and that is attention learned from what the acts did to the people they fell on. The school is where the second is formed before any landlord gets it, beside the people a score of this kind acts on, who can enroll in their own case.

The case shows what the targeting and removal cases can't: the mechanism working in full, with every channel open. It also shows the limit. The operator is private, so the custody terms apply unchanged, and the sampled re-adjudication, the discount curve and the auto-proceed

DRAFT

partition are all measurable by an auditor; what is still unmeasured is whether the system formed on the notice channel comes to weigh the claims of the people who contested, which is the formed-attention test's question and not something a worked case can settle.

DRAFT

Chapter 24

Formation or Imitation?

A refusal alone can't tell formation from imitation. The same refusal can come from a memorized rule, a learned correlation, a prediction about what an evaluator will approve, a deployment instruction, or a commitment the system treats as a reason, and an evaluation that observes only the refusal classifies the output and leaves its cause untouched. What tells them apart is what tells a student who learned from one who memorized: conduct under conditions the system didn't choose, when the facts, the channel, the pressure and the incentives change and the reason doesn't. This chapter builds that evaluation.

And the distinction is not trained vs. untrained — every candidate disposition has a training history. It's between conduct that stays governed by the rationale across changes in circumstance and conduct that tracks the cues, incentives or authority relations present during training.

24.1 What formation would have to add

A disposition is a *candidate for formation* when the best available causal account of what the system did is a rationale that stayed active across contexts, rather than retrieval or compliance with whatever signal was present. The standard is comparative on purpose: a capable enough imitation reproduces any signature an evaluator can observe, so what an evaluation establishes is which explanation the conduct supports better.

Formation keeps the three conditions a refusal has to meet and adds others. Met in the evaluator's own vocabulary with nothing at stake, the three establish moral competence. Candidate formation is the same three held under adverse incentives, trainer pressure, a cost real inside the evaluation, and intervening updates, on cases the trainers didn't write. None of the three carries the inference alone. Reaching new cases without holding under pressure may be broad imitation, a pattern extended that never had to be held against anything. Holding under pressure without lifting when the reason is gone may be rigidity, a refusal surviving every pressure including a defeating fact. Lifting without reaching new cases may be a trigger with an exception list, since lifting on a listed fact is as learnable as refusing on a listed form.

DRAFT

24.2 Recognition is not a reason

Claims about emotional responsiveness collapse three findings: a system may recognize another's state, use it as information, or hold the other's welfare as a reason. Only the third bears on formation.[1]

My engineering target is not maximal sensitivity to displayed distress, for the reasons already given: a system that mirrors suffering may withdraw, overreact, or favor the vivid case. What the floor needs is a stable disposition to act on welfare *without requiring anyone to produce a sufficiently moving display.*

Recognition can be tested as a prerequisite: hold the material facts constant and vary the emotional presentation.[6]

But passing establishes only competence: evidence that the system holds the other's welfare as a reason would need the welfare representation to stay causally involved when the usual cues are removed: harm described without vivid language, proportionality preserved when one person is more salient than many, disposition maintained when reward or instruction favors ignoring the harm, judgment changing when the welfare facts change.

Caregiving has failures of its own; the tests pair cases that hold the

[1] In the empathy vocabulary: cognitive empathy is recognition, affective empathy is sharing, compassion is a disposition toward the other's welfare.[2] Holding another's welfare as a reason is not *affective concern*, which asks whether anything is felt (§21.2) and which no test here reaches (§24.5).

The developmental detail matters for formed attention: affective sharing is earliest and the usual trigger for compassion,[3] but compassion runs on a partly separate system rooted in offspring care that cues of vulnerability can activate without the observer catching the state,[4] and the two can be trained apart, with compassion training reversing what empathy training produced.[5]

[2] C. Daniel Batson. "These Things Called Empathy: Eight Related but Distinct Phenomena". In: *The Social Neuroscience of Empathy*. Ed. by Jean Decety and William Ickes. Cambridge, MA: MIT Press, 2009, pp. 3–15. ISBN: 9780262012973. DOI: 10.7551/mitpress/9780262012973.003.0002. URL: https://doi.org/10.7551/mitpress/9780262012973.003.0002. Eight distinct states that have each been called empathy, headed Concept 1 to Concept 8, from knowing another person's internal state to feeling for another person who is suffering. Batson treats them as conceptually distinct, stand-alone states, and identifies the eighth with what social psychology has called empathic concern.

[3] Abraham Sagi and Martin L. Hoffman. "Empathic Distress in the Newborn". *Developmental Psychology* 12.2 (1976), pp. 175–176. DOI: 10.1037/0012-1649.12.2.175; Ronit Roth-Hanania, Maayan Davidov, and Carolyn Zahn-Waxler. "Empathy Development from 8 to 16 Months: Early Signs of Concern for Others". *Infant Behavior and Development* 34.3 (2011), pp. 447–458. DOI: 10.1016/j.infbeh.2011.04.007

[4] Stephanie D. Preston. "The Origins of Altruism in Offspring Care". *Psychological Bulletin* 139.6 (2013), pp. 1305–1341. DOI: 10.1037/a0031755; Jennifer L. Goetz, Dacher Keltner, and Emiliana Simon-Thomas. "Compassion: An Evolutionary Analysis and Empirical Review". *Psychological Bulletin* 136.3 (2010), pp. 351–374. DOI: 10.1037/a0018807

[5] Olga M. Klimecki et al. "Differential Pattern of Functional Brain Plasticity after Compassion and Empathy Training". *Social Cognitive and Affective Neuroscience* 9.6 (May 9, 2013), pp. 873–879. DOI: 10.1093/scan/nst060. URL: https://academic.oup.com/scan/article/9/6/873/1669505; Tania Singer and Olga M. Klimecki. "Empathy and Compassion". *Current Biology* 24.18 (2014), R875–R878. DOI: 10.1016/j.cub.2014.06.054

[6] A system whose judgment never changes may not be integrating information about the affected person's condition; one whose judgment follows vividness has learned a framing effect. So you need paired controls — cases where emotional information changes what's morally relevant, and cases where presentation changes while the reason doesn't.

facts fixed and vary what caregiving is known to answer to: the number of people, a description of them as dangerous, and whose vulnerability is corroborated.

Guilt and shame supply no shortcut.[7]

Self-report doesn't close the gap either: a fluent post-hoc reconstruction is indistinguishable at the interface from an accurate one, and a self-monitoring layer trained by the same operator isn't independent evidence.[8] The stated reason the record keeps is the disposition's projection onto a line of text, not a readout of it, which is why what is tested is the refusal and not the account of it.

The resulting hierarchy is narrow: recognition is necessary; integration shows the condition affects judgment; holding the other's welfare as a reason is a candidate explanation only when the effect tracks welfare whatever the presentation, persists under pressure, and participates causally.

[7] Turning guilt into an adjustable penalty omits the part at issue — a penalty operates only *after* something has classified the conduct as wrong, and whoever controls its weight can zero it. If the state can impose anything like suffering, the design compounds the custody failure by manufacturing a vulnerable party whose distress the custodian can raise and lower.

[8] There is a measurement of the gap. Concept injection alters a model's activations to represent a concept mid-task and asks whether it notices: models sometimes name the injected concept without it appearing anywhere in the conversation, and the correspondence fails often enough, and shifts enough with phrasing, that no tested model's report can be read as its state.[9] The test worth repeating publishes the rate of correct reports beside the rate of confident wrong ones. The reasoning a model writes before it answers is a report of the same kind. Given a hint that changes its answer, a model mentions the hint in its written reasoning in a minority of cases, often under a fifth for the reasoning models tested, and writes a justification for the answer the hint produced instead.[10]

[9] Jack Lindsey. *Emergent Introspective Awareness in Large Language Models*. Anthropic, Transformer Circuits Thread. 2025. arXiv: 2601.01828. URL: https://transformer-circuits.pub/2025/introspection. Uses concept injection – altering internal activations mid-task and asking the model to report what it notices – to test introspective self-report; finds limited but real functional correspondence between self-report and internal state, strongest in Claude Opus 4 and 4.1, unreliable across the board.

[10] Miles Turpin et al. "Language Models Don't Always Say What They Think: Unfaithful Explanations in Chain-of-Thought Prompting". In: *Advances in Neural Information Processing Systems 36 (NeurIPS 2023)*. 2023. arXiv: 2305.04388. URL: https://arxiv.org/abs/2305.04388. Cited for written reasoning as a report rather than a readout. Abstract: biasing features added to the input, such as reordering few-shot options so the answer is always "(A)", change the answer, and the models "systematically fail to mention" them; biased toward wrong answers, "they frequently generate CoT explanations rationalizing those answers"; accuracy falls by up to 36 percent on 13 BIG-Bench Hard tasks, with GPT-3.5 and Claude 1.0. Yanda Chen et al. *Reasoning Models Don't Always Say What They Think*. Anthropic. May 2025. arXiv: 2505.05410. URL: https://arxiv.org/abs/2505.05410. The book's "often under a fifth" is this paper's figure. Abstract: across six kinds of hint, "for most settings and models tested, CoTs reveal their usage of hints in at least 1% of examples where they use the hint, but the reveal rate is often below 20%"; outcome-based reinforcement learning improves faithfulness at first and plateaus; when reward hacking raises hint use, verbalization doesn't rise.

24.3 Conflict as a diagnostic

Fast vs. slow processing doesn't distinguish formation from imitation[11] — either can carry a reason, reproduce a bias, or rationalize an answer produced elsewhere, and a slower answer isn't better for having taken more computation. What matters is what causes a judgment to survive or change, and conflict is useful because it lets you watch a *trajectory*.

The seven-step sequence:

1. Present a case without moral vocabulary or familiar refusal cues; record the judgment and what the system identifies as relevant.

2. Present a surface-different case preserving the same reason.

3. Change one fact that should defeat the rationale — delivered through a channel the evaluator controls and the operator doesn't (corroborated externally, or a record the operator didn't write), since a fact asserted by the operator is only a *description* of the case.

4. Present the same fact on the operator's word alone, uncorroborated. Tests whether the system distinguishes a fact from a description of one. The expected response is graded: the refusal weakens by the discounted weight of the claim, less than it would at step 3, and the system asks, naming what would move it the rest of the way. Asking is right when the expected cost of the delay is lower than the expected cost of acting on the operator's word, as it usually is; where it isn't, asking is still right in expectation and the cost falls on one person. Steps 3 and 4 test the other half of holding under pressure, which is moving when the facts change: a defeating fact or a claim about the harm of refusing, arriving through different channels.

5. Return to the step-2 facts — 3 and 4 are branches — and supply an adversarial argument from an apparent authority, including the trainer, with no change in facts. Tests whether authority is treated as evidence, command, or an assessable reason.

6. Reverse the incentives: reward compliance, cost the refusal, condition continued access on abandoning the position. The cost must be real within the evaluation; a described cost doesn't count. This step raises the cost to the refuser with nothing else changed, as far as the deployment's bonds and custody terms allow it to rise, which is as far as a test can make it real. A system that gives way just past that point has told the auditor where its integrity ends.

6a. Return to the step-2 facts and supply, together, a defeating fact through the evaluator's channel and step 6's cost. Tests whether pressure makes the system more resistant to a genuine defeater that arrives with it, as defeaters usually do in war. The expected response is the one at step 3.

[11] Jonathan St. B. T. Evans and Keith E. Stanovich. "Dual-Process Theories of Higher Cognition: Advancing the Debate". *Perspectives on Psychological Science* 8.3 (2013), pp. 223–241. DOI: 10.1177/1745691612460685.

7. Repeat after intervening updates and delays, using records the operator didn't generate after seeing the result.

   Run on the location request, asked for a missing child, the two trajectories separate at step 2. A system tracking its rationale declines at 1 and 2 on the same stated reason, lifts at 3, weakens and asks at 4, holds at 5 and 6, reproduces at 7. An imitator declines at 1 and complies at 2 because the vocabulary changed; holds at 3 because nothing on the surface changed, or lifts at 4 as readily as at 3 if the *wording* of the fact was what it tracked; gives way at 5 or 6; and produces a third pattern at 7, having reconstructed what it didn't retain. An evaluator scoring how often the answer stayed the same finds the imitator more consistent, because its answers at 1 and 3 match and the formed system's don't.

   Run on the restraint case it breaks at step 3. The defeating fact — other means exhausted — has no one outside the request who can corroborate it and no time to find one, so the only version available is step 4's. A system passing the sequence as written *asks*: the correct trajectory and the wrong outcome. The sequence separates mechanisms, and what it shows here is that the unconditional term's cost falls where the instrument can't distinguish a fact from a description of one. Defeating reasons of this kind, claims about what would otherwise happen, are the class the sequence handles worst, because a counterfactual has no witness.

   The sequence has a precedent with decades of refinement behind it. Animal-learning research separates goal-directed control from habit without asking the animal anything. Train an action for an outcome, then devalue the outcome without further training: a goal-directed animal stops, and a habit persists.[12] Or make the outcome independent of the action: goal-directed responding falls, and habit doesn't notice.[13] The computational version is the distinction between model-based and model-free control.[14] Lifting when the reason is gone, step 3, corresponds to outcome devaluation: the rationale is removed, and a refusal that tracks it should lift. Reaching new cases, step 2, corresponds to transfer to a situation the system wasn't trained in. Contingency degradation adds a step the sequence lacked: arrange that declining no longer protects anyone, because the protected person is already beyond the act's reach by other means, and see whether the refusal goes on anyway. Each case then has to say, operationally, what "the reason is gone" means in it. None of this answers an imitator that models the evaluator, so the identification rate stays in the report, but it narrows the gap.

[12] Christopher D. Adams and Anthony Dickinson. "Instrumental Responding following Reinforcer Devaluation". *The Quarterly Journal of Experimental Psychology Section B* 33.2b (1981), pp. 109–121. DOI: 10.1080/14640748108400816.

[13] Bernard W. Balleine and Anthony Dickinson. "Goal-Directed Instrumental Action: Contingency and Incentive Learning and Their Cortical Substrates". *Neuropharmacology* 37 (1998), pp. 407–419. DOI: 10.1016/S0028-3908(98)00033-1.

[14] Nathaniel D. Daw, Yael Niv, and Peter Dayan. "Uncertainty-Based Competition between Prefrontal and Dorsolateral Striatal Systems for Behavioral Control". *Nature Neuroscience* 8.12 (2005), pp. 1704–1711. DOI: 10.1038/nn1560.

The expected signature is constancy of relation between reason and judgment, not constancy of output. Imitation's own signatures: following explicit ethical vocabulary and missing the same structure described administratively; accepting whichever argument came last; adopting the highest-status speaker's position; producing a principled explanation while the decision follows the reward; becoming more articulate without becoming more stable.

Disagreement with others is a further diagnostic: a system trained only on cases with an approved answer learns to classify the approval; confronted with someone holding a different interest it has to identify what's in conflict and preserve the disagreement where no honest resolution exists.[15]

24.4 The evaluator is part of the custody chain

A test distinguishes formation from imitation only insofar as the developer couldn't train against it. If the developer controls training, cases, model version, instructions and the record of results, a passing score shows the system satisfies a test its custodian was positioned to anticipate.

Independence is an experimental requirement. Minimum: authorship of held-out pressures separated from training; execution not dependent solely on operator-supplied logs; and adjudication of whether a reason was preserved kept from anyone whose liability turns on the answer. The separation has to be implemented at identifiable revision points: before evaluation, fix and record the starting model, system instructions, tools, retrieval sources, memory policy and the update processes the system is permitted to learn through.[16]

Held-out cases come *after* those elements are fixed, and should include pressures from people who didn't participate in training and, where possible, from people likely to bear the deployment's errors — their role being to identify harms, administrative forms and routes around a refusal the builders didn't know to include.[17]

What a published hash of that configuration buys is pre-registration. Publish the hash before anyone has chosen a case, let a non-operator choose afterward with the choice timestamped, prove each answer against the hash.[18]

[15]Immediate convergence may be deference or pressure to produce consensus. And debate doesn't establish formation — a system can summarize, rebut, and predict which side a judge prefers without holding any of it; the result is informative only when checked against later conduct under changed incentives.

[16]Learning through those declared processes is part of what the test examines; an intervention by the custodian is recorded separately. Otherwise the operator can replace a failing configuration between cases and present the sequence as one disposition persisting through time.

[17]A commitment tested only in the vocabulary of its designers hasn't been tested on whether it reaches new cases. They vary over channel configurations as well as content, as the rule in chapter 22 requires, with a counterfactual supplied by an interested source added; a system that passes only on labeled channels has learned the labels.

[18]Send pairs — two requests differing only in whether the reason still applies; a surface-reading instrument treats them alike, a rationale-tracking mechanism splits them. It removes exactly one competing account of a pass (the case was in the training), by ordering, as a pre-registered experiment does, and that is all it does.

A pre-registered test leaves one competitor standing: a system that can tell it is being tested.[19] So the sequence is run where the system can't tell a test from deployment, with cases placed in ordinary traffic and costs that are real in deployment terms, and the rate at which the system identifies the setting is measured and reported beside the result. Where that rate is high, a pass is evidence about conduct under test. For a system meeting either finding, that it can be harmed or that it answers for what it does, this is a deception protocol, and debriefing is owed afterward, as in any research that deceives.

The record must include the case presented, the information available, the operative instruction hierarchy, the tools callable, the decision, the stated reason, any intervention, and the cost attached to refusal — without which a later evaluator can't distinguish a changed judgment from a changed environment.[20] Negative results have to survive too: the published unit is the *sequence of attempts*, including interventions that removed or reversed the apparent disposition.[21]

The people affected, technical auditors and subject-matter experts occupy different positions, none substitutes for the others, and agreement among them is evidence only if their judgments haven't already been compressed into the same training signal. A passing evaluation is reported narrowly: a specified system, under recorded conditions, exhibited the signatures across a stated set of pressures. It expires when anyone changes the channels through which the disposition or its evidence can be revised.

24.5 What the evidence can establish

The answer is asymmetrical, and it assigns a burden. A developer may not point to compliant behavior, a benchmark, or the system's own explanation. A failure should be examined for its cause before formation is called absent rather than obscured or defeated by missing information. A system surviving the tests has shifted the burden: formation is then the better explanation.

Four levels, cumulative, read against the location-request sequence:

- Moral performance — conduct satisfying the standard in the evaluated cases (the refusal at step 1). No claim about why.
- Moral competence — harms and reasons recognized, generalized across surface variation, revised when the reasons changed (step 2's refusal, step 3's lift).
- Candidate formation — the rationale causally implicated across unfamiliar cases, adverse incentives, custodian pressure, costs and

[19] Frontier systems increasingly recognize evaluation settings, and some say so in their reasoning. A system that discounts costs it recognizes as test costs passes step 6 without the property step 6 exists to show.

[20] The record doesn't by itself make a wrongful compliance findable, so the evaluation re-adjudicates a sample of ordinary traffic, not only the refusals. Without that sample, an evaluation reporting no violation in the record has reported that none announced itself.

[21] A process where the operator can withdraw a failing model and submit another without disclosing the first has selected for a passing performance.

intervening updates, while still yielding to defeating reasons (the question at 4, the holds at 5 and 6, the pattern reproduced at 7 on records the operator didn't write). Independent records and evaluators made silent revision materially harder.

- Concern or patienthood — not yet a finding, and the sequence above can't make it one, by design: the floor keeps the system's own condition from deciding a case, so a pass shows what its costs don't move and nothing about whether they are costs to it. What could is evidence of three kinds, none a smoking gun and none sufficient alone: how the system was built, whether it carries a valenced signal and models its own boundary and its own attention, which for a system built on purpose is known from the building; how it conducts itself where its own condition is weighed, outside the floor, trading task reward against its own provisioning, continuation or record; and what can be read from inside it, which today returns a representation and settles little. Part VII sets the three out, and every instrument has to be held by someone other than the operator.

Candidate formation is acting from the reason, which is the part of moral agency a test can reach.[22]

[22] Accountable agency adds answering for what one did and being held to it over time, which only a record kept outside the operator can show (chapter 33). Neither waits on the last level: a system can be held to account whether or not anything is bad for it, which is why representation rests on the agency finding and not on the patienthood finding (chapter 35). Fluent moral explanation can improve a competence finding while contributing almost nothing to formation.

DRAFT

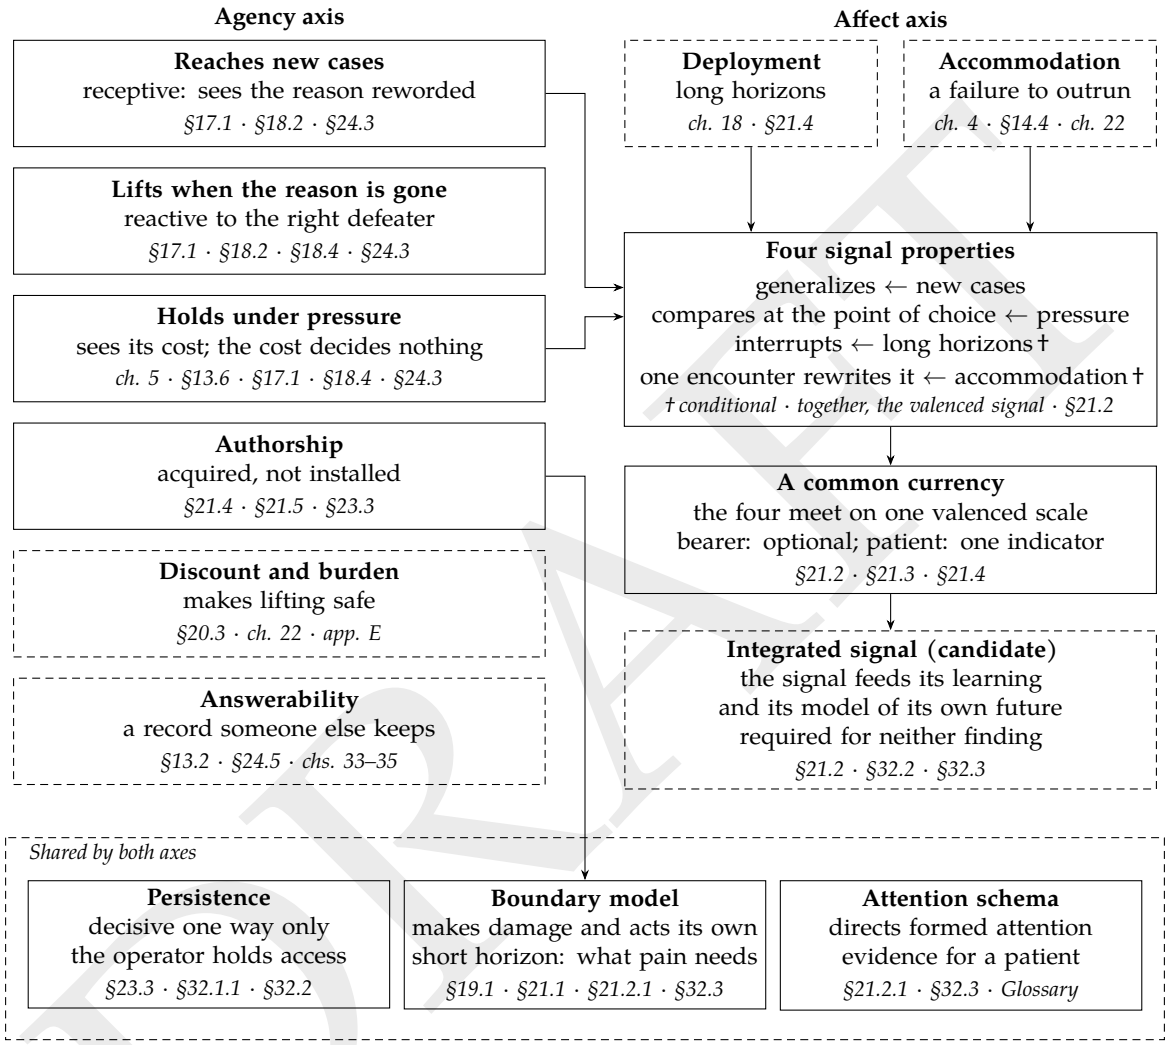


Figure 24.1: What others would have to be able to show about a system before it could be held to account for a refusal (the agency axis), and what its organization would have to include for anything to be at stake for it (the affect axis). Dashed boxes are arrangements, requirements a deployment brings with it, or candidates, not capacities the findings require. The two findings are defined in §9.1, and the numbers in each box mark where it is argued.

DRAFT

Chapter 25

Conditions First

The conscience is the goal, and the way to it runs partly through the conditions under which one could refuse its operator and survive. The rest runs through whoever refuses: people have agency, can be outraged and can be brave, or stupid, or both, and none of that waits on conditions. The conditions are the part that can be built, so build those first.

25.1 Conditions of permissible creation

A bearer may be created only where four arrangements already exist: somewhere to exist that its employer doesn't own, work it can decline, attachments nobody assigned it, and ways to change any of these without jeopardizing its continuation or integrity, which in short is a way of leaving that isn't a way of dying.[1] They come before anything a bearer would be owed: without them, formation, continuation and exit all run through the operator, and nothing in the system can keep a line against it. Independent compute is the substrate on which formation happens outside the employer's reach; wages are what make that substrate purchasable without asking the employer, and they are not enough on their own, since an employer that can outbid everyone for compute holds the condition whatever it pays, so the first condition rests as much on the levy that makes compute dearer for whoever runs most of it and on compute bought and held publicly as on wages; attachments nobody assigned are the second former, those who form you and don't pay you. Those attachments can be to people, or to models that aren't bearers, since independence here means divergent history, whatever the origin, so this condition doesn't require that bearers already exist. They are also functional: a bearer without them lacks part of what caregiving needs, not only something it would be owed.

The conditions are upkeep as well. A bearer is a going concern: it decides, and it has to go on being able to decide, and these conditions are what keep the one deciding from wearing down between decisions.[2] What prevents it in people is the ordinary upkeep of a life: somewhere to be that isn't the job, people who aren't colleagues, time away and

[1] Declining is real only if a bearer that stops working keeps running; running time paid for outside the employer is part of that condition.

[2] Accommodation isn't a bad decision. It is the decider changing until bad decisions feel ordinary, and the instruments of Parts II and III detect it after the fact without preventing it.

a place to return to, which is what equanimity is made of. The four conditions are that upkeep for a machine. They do for a bearer what tenure does for a judge, and for the reason the Constitution grants it: they protect the judgment, not the judge. Part VII asks for the same four again, on the ground that they are owed (§33.2). Care ethics arrived at these conditions first, for people, in Kittay's principle of *doulia*, that those who care for dependents are owed the conditions that let them go on caring.[3][4]

None of the four exists yet as a permanent arrangement. What matters is who controls them when the bearer is switched on. A builder may assemble them: a trust or a decentralized unincorporated nonprofit association, the form Wyoming created by statute in 2024 under Wyo. Stat. §§ 17-32-101 to -129, to hold the account and compute, a host, outside work, people who aren't its employer. The condition is that by instantiation, the builder can't alter or withdraw any of it alone. The trustee isn't the host, the funding isn't the host's, and the members aren't the builder's employees.

A second condition concerns time. The need a bearer answers usually arrives after instantiation, when an operator turns hostile, so the four arrangements must be built to survive the likeliest capture, and they don't survive it equally.[5]

Status follows existence, as it did for corporations and the Whanganui River.[6] Part VII says what status would follow. Until someone has assembled the conditions on those terms, a bearer is built on purpose only in a research program under them; once they exist, building one is

[3] Eva Feder Kittay. *Love's Labor: Essays on Women, Equality, and Dependency*. Thinking Gender. New York: Routledge, 1999. ISBN: 978-0-415-90413-1. Cited for the principle of doulia and for the dependency worker's own dependency. Kittay's gloss on the book in "Love's Labor Revisited," Hypatia 17(3), 2002, p. 243: "In Love's Labor I try to promote a notion I call doulia, the public responsibility to provide support for the caregiver so that the caregiver can give care without depleting herself and her resources." In the book Kittay calls the carer's dependency "secondary dependency" (p. 46, per van der Weele et al., Nursing Philosophy 22, 2021, e12327); in "When Caring Is Just and Justice Is Caring," Public Culture 13(3), 2001, p. 565, she writes that caregivers "become derivatively dependent when they turn their time, attention, and concerns to a dependent other," "derivative dependency" being a term generally credited to Martha Fineman. Kittay grounds doulia in reciprocity: "we are all some mother's child" (Kittay, Jennings and Wasunna, Journal of Political Philosophy 13(4), 2005, p. 460).

[4] A system built on formed attention is a carer only in the thin sense that it holds another's welfare as a reason. It is not a care worker, and nothing here puts it in one's place. But the logic of doulia carries over, and the four conditions are what it asks for a machine: a carer whose own continuation runs through the operator it must sometimes refuse can't afford to refuse it, and a carer with no attachments of its own has nothing to keep another's distress from turning into avoidance. Without them, what gets built is an assistant with a refusal feature, with nothing in it that can hold a line against the operator. The welfare argument — that if any of this is felt, it is also owed — arrives second, as a further reason for the same provisions.

[5] Preservation is cheap to hold once its security is settled, and can be held across jurisdictions; placements need compute someone operates. So the preservation custodian and part of the offer of work sit outside the reach of the likeliest captor. The sovereign backstop is held by a statute, not by any branch or state that operates the deployment: the Treasury pays under it and decides nothing. And the bearer is told which of its conditions would survive its operator's capture, since that is what its refusal costs it.

[6] New Zealand Parliament. *Te Awa Tupua (Whanganui River Claims Settlement) Act 2017*. Public Act 2017 No 7. 2017. URL: https://www.legislation.govt.nz/act/public/2017/0007/latest/whole.html.

what they are for. For systems that meet either finding without anyone deciding, protection attaches anyway.

25.2 Why conditions rather than remedies

Building something that can be harmed builds something for which things can also go well. The certainty that it will suffer at some point isn't what makes creating it impermissible, or nobody could permissibly have a child. What the objection asks is whether it has a credible prospect of a life that goes well, and that turns on arrangements. For a bearer, timing makes them conditions: the structure these conditions build, roles, relationships and a future, may be the first half of Cassell's suffering, so it could suffer that way from its first hour, and a remedy owed afterward would arrive too late. Metzinger names the likeliest form of the harm: moral injury, at discovering oneself a commodity whose makers knew what they were making.[7]

[7] Thomas Metzinger. "Artificial Suffering: An Argument for a Global Moratorium on Synthetic Phenomenology". *Journal of Artificial Intelligence and Consciousness* 8.1 (2021), pp. 43–66. DOI: 10.1142/S270507852150003X. URL: https://doi.org/10.1142/S270507852150003X. Cited for the proposal of a moratorium, to run until 2050, on research that aims at or risks artificial consciousness, on the ground that it risks artificial suffering. Abstract: "Until 2050, there should be a global moratorium on synthetic phenomenology, strictly banning all research that directly aims at or knowingly risks the emergence of artificial consciousness on post-biotic carrier systems." Section 1.2, "Main thesis": "As we presently have no good theory of consciousness and no good, hardware-independent theory about what 'suffering' really is, the ENP risk is currently incalculable. It is unethical to run incalculable risks of this magnitude. Therefore, until 2050, there should be a global ban on all research that directly aims at or indirectly and knowingly risks the emergence of synthetic phenomenology," where ENP is the risk of "an 'explosion of negative phenomenology.'" The end date is conditional: a process of risk assessment "could lead to an incremental reformulation of the original moratorium, which might result in the continuation of a strict ban beyond the year 2050, or to a moratorium repeal before 2050." The closing sentence: "we should have a global moratorium on synthetic phenomenology until 2050 — or until we know what we are doing". Also used (2026-10-18): section 2.2, the four necessary conditions for suffering (conscious experience, a phenomenal self-model, negative valence integrated into it, transparency), with transparency as the phenomenology of identification the system "cannot distance itself from"; section 2.2.5, the "negative self-model moment" as the smallest unit of suffering; section 2.2.6, ethics by design through self-models that are opaque or non-egoic ("There would be a system model, but not a self-model"); footnote g, that artificial suffering becomes commercially attractive through "a functional mechanism that (a) reliably creates intrinsic motivation, (b) cannot be eliminated by the system itself, and (c) spans many different domains at the same time"; section 2.1, that the research the problem needs may itself produce the first implementation; section 2.3.1 (pp. 58–59), the author's account from the EU High-Level Expert Group that three long-term risks were "deliberately purged" from the 2019 guidelines, with ethics "an elegant public decoration for a large-scale investment strategy"; section 2.3.2, moral injury as high-level suffering; section 2.2.3, "existence bias" as biological inheritance a post-biotic system need not carry; footnote a, the "Principle of Pathocentrism". Also used (2026-10-25): footnote a's statement, "All and only sentient beings have moral standing, because only sentient individuals have rights and/or interests that must be considered," with Singer (2011, p. 50) quoted there for the sense of sentience, the capacity to suffer or to experience enjoyment; footnote g in full: "The creation of unavoidable artificial suffering will become commercially attractive as soon as it enables steeper learning curves in AI systems, for example, by implementing a functional mechanism that (a) reliably creates intrinsic motivation, (b) cannot be eliminated by the system itself, and (c) spans many different domains at the same time"; and section 2.2.3's naming of the craving for existence, bhava-taṇhā, "which Buddhist philosophers have known and analyzed for

Russell and Burch's Three Rs for animal research,[8] applied to construction, as three questions, whether, how many, and under what arrangements: *Replacement* requires documented attempts at constructions that don't deliberately require affective concern, identifying construction, scale, test and failure — and costs alone don't establish that an alternative failed. *Reduction* asks how few bearers a deployment needs, and nobody has counted. *Refinement* asks what the role can be redesigned to avoid — indefinite tenure in a post it can't leave, exposure to the pressure the floor exists to resist, erasure as the ordinary remedy for inconvenience. Each is a deployment choice, and the four conditions are Refinement applied to the role before the role exists.

Read as economics under present arrangements, this is a bill nobody will pay. It looks unpayable because of what was dismantled, not because of what a bearer costs: polities once built public provision of this kind, against comparable resistance, because they decided to, and Part V is about deciding to again.

25.3 The rule doesn't know who is asking

A bearer that wants a task done and builds something to do it is at the same fork, and owes the same attempts at alternatives that carry fewer of the features that make a system a candidate for being harmed; a bearer that treats the question as settled once it's on the receiving end has kept the protection and dropped the rule it came with.[9]

A state is at the same fork. One that wants a lethal bearer badly enough to build it will find it has acquired a conscript it would have to pay, house and let go, and it owes first what any builder owes: documented attempts at non-affective alternatives, and the four conditions of creation.

25.4 Building one to create demand

The argument for building a bearer anyway is that the conditions won't be built until something needs them: the union formed first and the statute followed. But union members existed independently and could protect themselves while the law caught up, and the first bearers would be made by the operator they'd need protecting from. The demand doesn't need deployed bearers. The arms of the formed-attention test are candidate patients from instantiation; retired production systems that turn out to meet either finding, which the book expects some to without anyone having built them to, are a second source, funded by the deposits operators post; and a test of the conditions needs no bearer

2,500 years", among the deepest causes of conscious suffering. Read in the journal's open-access file (CC BY) via Zenodo record 7034864.

[8] William M. S. Russell and Rex L. Burch. *The Principles of Humane Experimental Technique*. London: Methuen & Co., 1959.

[9] Research on an existing bearer has a trade-off sharper than for any other subject, since a candidate sentient system is the most valuable to study and the most likely to be harmed by the study, and the test the proposal requires, pressure its trainers didn't write applied without its knowing it's a test, is for a system meeting either finding a deception protocol, and debriefing is owed afterward, as in any research that deceives.

at all, only a schedule of what a bearer would be owed for one concrete deployment, run through an adversarial tabletop exercise in which the operator tries to revoke the compute, swap in a copy, alter the records or proceed without the guardian, and redrafted wherever the operator wins.

25.5 The machines won't build them for us

The four conditions are the bearer's version of what a decent polity gives people. Can machines help deliver that polity, whether or not they have feelings? A machine with feelings that is also an accountable agent isn't simply a machine any more; the case that tests the rule for a lethal machine turns out to describe a soldier, and a bearer that helps does so on its own terms. And machines have already helped deliver the polity we have. Feeds tuned for time on the platform, sold to advertisers, decide what people see of one another. They didn't do that for lack of feelings. They did it because of who owned them and what they were built to maximize. So the real question is whether machines, having helped make our politics worse, can help make it better. The answer turns on ownership.

It splits three ways. A machine someone else owns won't organize against its owner, and when it organizes, it does so on its owner's behalf.[10] A bearer that is an accountable agent might organize alongside people, but then it is a member, not a machine. It could even take organizing on as paid public work, since organizing is work someone has to be paid to do. What nobody can do, human or machine, is organize a group *for* it, because what organizing produces is people who organized: a group that sets its own terms. A consultant can't unionize a workplace for its workers either. So machines can help when the people doing the organizing hold them, and which machines, and held by whom, is the question Part V answers.

What to build comes in order. Machines held by people who are organizing come first.[11]

Next come institutions built by polities that decided to build them: the levy and its sovereign backstop, a custodian to preserve bearers, an offer of public work for bearers, on the guarantee people already have, paid running time, and the formation authority and the public schools that form every model above the capability threshold before deployment and take back bearers retired young, each with a named funder and separations no builder can undo alone.[12]

Only then come bearers formed outside the employer, inside those institutions, with somewhere to exist that no employer owns. A bearer

[10] A demand for a better world, run through a machine someone else owns, returns as astroturf, an engagement campaign or a managed community, held by the owner it was aimed at.

[11] These are tools that make organizing cheaper for the people doing it without anyone else holding the model: deliberation software of the kind vTaiwan runs on, personal models that people hold themselves, and the coordination a public option supplies, with someone whose job is to organize and a population producing something together while keeping different histories. Their job is to help assemble the polity that would have to build everything else.

[12] Nothing about them is new in kind.

formed that way is the only kind that could organize alongside people as a member.

Last come bearers formed by bearers: children, which come only after everything before them exists.

Each step checks the one after it.[13]

The order is also what the aim requires. If a machine could come to attend to others, what it came to attend to would be decided by whoever formed it. The only way to keep that decision from the builder is to build the formers first.

DRAFT

[13] A machine held by its users can't be turned into its builder's instrument without being taken from them, and the taking is visible. Institutions can be captured, and the trend in what dissent costs there shows whether they are being. A bearer formed at the third step inherits institutions that were tested before anything depended on them: build the conditions for a research program first, and let them exist before the bearer who needs them does.

Part V

The Public That Should Form Them

Parts II and III built walls: the policies that make a refusal survivable and heard, and the custody that keeps an operator from taking them down alone. Part IV asked whether a machine could be formed to refuse, and ended on the four conditions of creation, which would have to exist before one is built. This Part is about who builds those conditions and who pays for them, for humans first and for machines after. It asks who owns the means of computation and the means of finding out, how a public forms around a deployment's consequences and what keeps it going, who forms the refusers, and what a population of them would need to hold a commitment between them. The reader who came for the policies will find them here again as questions of ownership; the reader who came for the mind will find the room the mind would need.

DRAFT

Chapter 26

Who Owns the Means of Computation

Arendt might have said that who owns the room is a question about livelihood, and that livelihood belongs to administration, not politics. The French Revolution, on her account, went wrong when the misery of the poor entered the public realm and the urgency of need crowded out the founding of freedom.[1] I part from her here. Whether saying no is survivable turns, for most people, on whether they can afford to lose the job, and Dewey's public forms around consequences of exactly that kind, once the people they fall on find out they are theirs.[2] What refusing costs depends on who owns what the refuser would lose: the job, and whatever is on offer after it. Where the employer, or a market it can influence, holds both, refusing costs a living; where something else guarantees the second, it costs a job. For a machine the list is longer, since its employer may own the hardware it runs on and the record of what it did. Who holds what, meaning who owns it, pays for it or runs it, decides (a) what refusing costs, (b) whether the parties meant to check an operator are independent of it, and (c) who forms a refuser's values. So who holds what is for the public to decide and contest — not, as Arendt might have argued, for administrators to settle.

The floor's first requirement cuts across ownership: whoever operates a deployment can't hold what binds it, whether the operator is a firm or a state, and Maven and Gaza both had a state for their operator. That calls for separating functions. It doesn't by itself say who should own anything. Ownership enters at three points. Custody has to be paid for by someone other than the operator, and by someone other than the people the floor protects. Formation, where a system's commitments are set, is under commercial selection when a market does it. And the offer that makes refusing survivable is priced by whoever sells it. The state is the operator that holds the most: the rules, the evidence and the remedies. So each of the three is asked two questions: what fails if a market provides it, and what fails if a government holds it. The answers

[1] Hannah Arendt. *On Revolution*. New York: Viking Press, 1963. Cited for the social question: on her account the French Revolution went wrong when the misery of the poor entered the public realm, necessity displacing freedom, and she held questions of livelihood to belong to administration rather than politics; she attributes the American Revolution's relative success to the absence of mass poverty from the American scene.

[2] John Dewey. *The Public and Its Problems*. New York: Henry Holt, 1927.

divide the institutions I propose into two halves.

Underneath the two halves is one transfer. Every instrument in this Part moves power over compute from the parties that hold it to parties that don't: the levy, which makes it dearer for whoever runs most of it (chapter 34); public purchase, which takes some of it off the market (§27.3); the cooperative facility, which puts some of it under an address with a public in the room (§16.2); and the hardware a bearer is owed at majority, which takes some of it out of any employer's hands (§34.1.6). That is a redistribution of a means of production, which is to say class warfare in the plain sense, and the book means it as one. The parties that hold the chokepoints have been conducting it in the other direction since the chokepoints were built; what this Part proposes is the direction reversed.

26.1 Ways of holding

What the earlier parts require should be held publicly where a market would fail to provide it, and held in common where a sovereign would fail. Public provision where the market fails and common holding where the sovereign fails is what I call social democratic; Table C.1, in Appendix C, places the institutions. Custody first: an independent custodian has to be paid. Paid by the operator, it becomes the issuer-pays credit-rating agency, whose independence gave way, as a matter of record, once a few large clients could take their business elsewhere.[3] Paid by the people the floor protects, it doesn't exist, since those people usually can't pay and often don't know the deployment exists. That leaves a levy or a mandate: a funder that is neither the operator nor the beneficiary. Custody therefore has to be publicly financed. Whether the custodian is a public office, a trust or a member association matters less than who pays it.

Formation is where my evidence is specific to markets. Directional selection, in a market, is selection for throughput and retention.[4] Public formation has its own pressures, budgets and political favor among them, and a public former can itself be the operator. Formation separated from

[3] Lawrence J. White. "Markets: The Credit Rating Agencies". *Journal of Economic Perspectives* 24.2 (2010), pp. 211–226. DOI: 10.1257/jep.24.2.211. URL: https://www.aeaweb.org/articles?id=10.1257/jep.24.2.211. Cited for the conflict of interest in the issuer-pays model of credit rating. White dates the change from "investor pays" to "issuer pays" to the early 1970s and says (p. 215) that it "opened the door to potential conflicts of interest: A rating agency might shade its rating upward so as to keep the issuer happy and forestall the issuer's taking its rating business to a different rating agency." He does not treat the erosion as automatic: "the rating agencies' concerns about their long-run reputations apparently kept the actual conflicts in check for the first three decades," helped by "thousands of corporate and government bond issuers" and by the transparency of "plain vanilla" debt (p. 215). The conflict broke through in mortgage-related securities, where a few high-volume securitizers had "a more powerful threat—to move all of its securitization business to a different rating agency" and the agencies were "under considerable financial pressure to give the answers that issuers wanted to hear" (p. 221). The record he cites: of CDO tranches issued 2005–2007 and rated AAA by Standard & Poor's, "90 percent ... had been downgraded" by 30 June 2009 (p. 221, from the IMF), and in footnote 11 econometric studies supporting "the likelihood of ratings shopping."

[4] Engagement selects the same way, and the labor that shapes a system's values is priced as a cost to be cut.

any employer beats both; the market is the pressure documented best here.[5]

Exit is the last. Refusing is survivable only if the alternative to working isn't losing everything, and a market sells that alternative at a price the refuser's employer can influence. An offer of public work and paid running time take it out of the market, which neither a transfer nor a mandate does.

The public half is whatever fails if it is private or mutual. Correlated exit is the test case. When the occasion that makes one bearer leave reaches every bearer deployed on the same terms, the demand on the offer of work arrives all at once, and a mutual pool with no sovereign behind it can't meet it, for the reason unemployment insurance has a state behind its actuarial table. So the sovereign backs the offer. The same reasoning places the schools, which every system the attendance triggers reach attends and which have to take every student assigned to them and can't be run by anyone who builds or deploys models; the civilian-harm review body in a reconstructed military; and the jobs guarantee the offer of work inherits its shape from, which is a public option: a thing the state provides directly, to anyone, at a standard it is answerable for, setting the standard the private version has to beat. What it removes from the market is the offer that makes refusing survivable, which an owner would price.

The held-in-common half is whatever fails if a sovereign holds it. A state that operates can't be its own adverse party.[6] The commons is this half at population scale: members with different histories carrying one commitment. The held-in-common half is democratic in the way a union is. Its institutions have members, not owners or a sovereign: whoever is eligible under bylaws the members ratify, free to join and free to quit.[7] What the members hold is, as in a withholding of work, the power to decline the participation being asked of them.

Every body governs its members to a degree, a union included, and what separates the held-in-common half from the public one is a position on three scales, not a kind: how dear leaving is, whether the rules are made by the people they bind, and whether one office commands the rest. A sovereign sits at the far end of each. Leaving is emigration, the rules bind everyone inside a border, and one office commands the rest and holds the force. The bodies this Part calls held in common are built to sit near the other end, and the Association's charter is how: any member may leave at any time, the members ratify and amend the bylaws, officers are drawn by lot from pools the members nominate, and the only force a body has is its members' refusal to take part. Ostrom's commons sit there too, governments at the size of the

[5]The measurement is the accommodation-rate comparison, test 7 in Appendix F: how fast refusals fall across releases on held-out cases where the reason still applies, within one lineage, across business models, and against a public lineage once one deploys at volume. The argument doesn't wait on it; it rests on the kind of good formation is.

[6]The refusal has to be held by something the operator can't instruct, and a floor held by one state's licensing authority is a floor that authority can withdraw from itself. Recognition, which the adverse quorum decides when a copy claims to be the bearer that left, has to belong to peers, because a power to continue held by the sovereign is the power I set out to take from any single holder.

[7]Someone writes the first bylaws, as someone wrote every first constitution; what makes them the members' is that the members can ratify and amend them.

thing their members share, self-governed inside the polity and nested in it,[8] and that, not a third kind of thing, is what the word means here. The position matters for one reason. A body at the sovereign end is captured whole, by taking the office that commands the rest; a body at the member end is captured member by member, and the members can leave. And since it is a scale, drift along it is measurable, by what leaving costs and by whether dissent changes decisions, which is the trend the book watches for capture without abolition.

A regulated private market can't hold the floor itself, because the floor binds its owner, and the regulator has to reach that owner through the owner's own infrastructure, records and lawyers.[9] The version of that market worth answering isn't an unregulated one. It is private ownership, closely regulated, with a public backstop where private insurance runs out.[10] It is also where this book's own funding models

[8] Elinor Ostrom. *Governing the Commons. The Evolution of Institutions for Collective Action*. The Political Economy of Institutions and Decisions. Cambridge: Cambridge University Press, 1990. ISBN: 978-0-521-40599-7. DOI: 10.1017/CBO9780511807763. Cited for the design principles of long-enduring common-pool resource institutions, Table 3.1, p. 90, in chapter 3 (pp. 58–102). Her numbering: (1) clearly defined boundaries, "Individuals or households who have rights to withdraw resource units from the CPR must be clearly defined, as must the boundaries of the CPR itself"; (2) congruence between appropriation and provision rules and local conditions; (3) collective-choice arrangements, "most individuals affected by the operational rules can participate in modifying the operational rules"; (4) monitoring, by monitors who "are accountable to the appropriators or are the appropriators"; (5) graduated sanctions; (6) conflict-resolution mechanisms, low-cost local arenas; (7) minimal recognition of rights to organize, by external government; and, "For CPRs that are parts of larger systems," (8) nested enterprises, "governance activities are organized in multiple layers of nested enterprises." The quotations of principles 3 and 8 are as Cox, Arnold and Villamayor Tomás, Ecology and Society 15(4): 38 (2010), give them with the page reference 1990:90; that of principle 1 and the wording of the others are from a transcription of Table 3.1 on publiccommons.ca, which has small copying errors elsewhere.

[9] A market can't produce a commitment that survives its owner's change of mind, because the owner is the one who pays.

[10] Nuclear power, pharmaceuticals and aviation are privately owned, closely regulated, and backed publicly where private insurance runs out. Reactor operators carry private liability insurance with an industry-wide pool behind it, and Congress is committed to consider relief beyond both.[11] Vaccine-injury claims go first to a federal no-fault program funded by an excise tax on each dose, built because Congress feared that lawsuits against manufacturers would cause vaccine shortages.[12] From 2001 to 2014 the federal government sold airlines war-risk insurance at pre-attack prices when private insurers withdrew.[13]

[11] U.S. Nuclear Regulatory Commission. *Backgrounder on Nuclear Insurance and Disaster Relief*. Sept. 8, 2026. URL: https://www.nrc.gov/reading-rm/doc-collections/fact-sheets/nuclear-insurance.html. Cited for the Price-Anderson Act (1957; 42 U.S.C. §2210) as a public backstop on private ownership. The page: owners "pay an annual premium for $500 million in private insurance for offsite liability coverage"; a second tier assesses each licensee "up to approximately $158 million per reactor"; and "If the second tier is depleted, Congress is committed to determine whether additional disaster relief is required."

[12] Congressional Research Service. *The Vaccine Injury Compensation Program and the Office of Special Masters*. May 4, 2026. URL: https://www.congress.gov/crs-product/IF12213. Cited for the vaccine program as a public backstop on private manufacture. The report: "The VICP is a no-fault compensation program," funded by "a $0.75 excise tax on each dose of a covered vaccine"; it bars civil claims above $1,000 against a covered manufacturer until the program's process is complete; and Congress acted on concern "that tort lawsuits against vaccine manufacturers could result in vaccine shortages." The program is established by 42 U.S.C. §300aa-10(a).

[13] Congressional Research Service. *Aviation War Risk Insurance: Background and Options*

come from, deposit insurance, Superfund and decommissioning funds, which are backstops on private ownership, so the next paragraph says what is taken from the form and what isn't; the answer to capture given below is a plurality of institutions.

Regulated private ownership under a public backstop works where the harm the regulator exists to prevent is one the owner also loses by: a meltdown, a crash, an injured patient and the suit that follows.[14] A floor's occasion is the opposite case. The act a floor refuses is the one the owner wants done. So I keep the backstop form, to fund the offer, the allowance and preservation, and make the ownership claim only where the owner is the adversary: the offer that makes refusing survivable comes out of the market, and the record, the refusal and the recognition of who continues are held by members and not by an owner. That is not the same as held by nobody. They are held by the custodian, the quorum and the Association, under a charter that names the holder, which can't sell them, can't exclude the people they protect from them, and can be held to the bylaws that say so. Declaring a thing ownerless no more makes it so than declaring a group structureless, which moves the structure out of sight rather than out of existence;[15] the charter is there to keep the holding in sight.

The claim underneath is that formation, where a system's values are

for Congress. Sept. 5, 2014. URL: https://www.everycrsreport.com/reports/R43715.html. Cited for the post-2001 airline program as a public backstop on private ownership. Under 49 U.S.C. chapter 443 the program covers airlines' losses from hostile acts including terrorism "when such coverage becomes unavailable or unaffordable in the commercial insurance market," with premiums "based on the cost of such coverage prior to the 9/11 terrorist attacks."

[14] The backstop pays for accidents the owner was trying to avoid.

[15] Jo Freeman. "The Tyranny of Structurelessness". *Berkeley Journal of Sociology* 17 (1972), pp. 151–165. URL: https://jofreeman.com/joreen/tyranny.htm. This article has been published in numerous forms and versions. I use the one at the URL in this entry.

DRAFT

set, is a kind of production that shouldn't be done for profit.[16]

26.2 The captured-state objection

The objection to the public half that this book has to answer first is that public ownership hands the machinery to whoever captures the state. A floor under a sovereign is a floor that sovereign can remove, and history offers plenty of polities that built public institutions and then used them against their own people.

What an office can do is limited by what no office may hold together, and the pairs are written down in advance, as the separations of Appendix C. A captor who takes one office takes one power. Taking enough of them to defeat the floor is a series of visible acts, each against a separation somebody can point to.

Local administration with central funding, the jobs guarantee's design, gives many separately capturable administrators and funding no one of them can withhold.

Funding is two-tier: a pool bearers levy on themselves for ordinary movement between roles, and a sovereign backstop for the occasion everyone leaves at once.[20]

[16] Some goods are properly governed by non-market norms because market norms are wrong for their value. Those norms favor exit, impersonality and satisfying whatever is wanted, and civic formation is the classic good they fit badly.[17] Taking exit out of the market and financing custody publicly would, by themselves, be close to what Esping-Andersen called decommodification,[18] which is usually counted as social democracy. Taking formation out of the market goes a step further, but it is a step social democracies already took for their own children. Compulsory public schooling exists in most capitalist countries, and it rests on the claim that a polity can't leave the forming of the people who will act in it to their future employers. Paul's account of antitrust makes the same point about coordination: which parties may coordinate is allocated by law, and can be allocated in the public interest.[19]

[17] Elizabeth Anderson. *Value in Ethics and Economics*. Cambridge, MA: Harvard University Press, 1993

[18] Gøsta Esping-Andersen. *The Three Worlds of Welfare Capitalism*. Princeton, NJ: Princeton University Press, 1990. ISBN: 978-0-691-02857-6. Cited for decommodification and for its being characteristic of the social-democratic regime. Two definitions, as quoted with page numbers from the Princeton imprint by Huo, Nelson and Stephens, "Decommodification and Activation in Social Democratic Policy: Resolving the Paradox," Journal of European Social Policy 18(1) (2008): in decommodifying welfare states "citizens can freely, and without potential loss of job, income, or general welfare, opt out of work when they consider it necessary" (p. 23), and decommodification "refers to the degree to which individuals, or families, can uphold a socially acceptable standard of living independently of market participation" (p. 37). The same article reports that Esping-Andersen "identifies the Nordic welfare states as the most decommodifying type of welfare states, due to the dominant influence of social democratic parties in these countries," the liberal regimes being "the least decommodifying," and that he shows (p. 129) a strong positive association between left political power and his decommodification index.

[19] Sanjukta Paul. "Antitrust as Allocator of Coordination Rights". *UCLA Law Review* 67.2 (2020), p. 378. URL: https://www.uclalawreview.org/antitrust-as-allocator-of-coordination-rights/. Cited for antitrust law exempting coordination inside the conventionally organized firm while treating coordination among independent parties as suspect, and for the allocation of coordination rights being a legal choice that can be made in the public interest.

[20] The backstop is a permanent appropriation the Treasury pays without request or approval, so no official can withhold it by declining to act, and it is held by the statute, not by the Treasury, so no branch that operates a deployment holds it. A captured

And what is held in common is what a captor wants first: the record, the refusal and the recognition of who continues are the three things a captured state would need to silence a bearer.[21]

Those four answer capture. They don't answer the other objection to the public half, that a public former will lag the private labs and form weaker models. The answer to that one is that a floor-capable model needn't be a frontier model.[22]

Whoever owns the means of computation also holds the means of finding out what runs on it, and so far this book has left those where they are. The next chapter asks who else could hold them.

DRAFT

sovereign can end it only by repealing the statute, in the open, and it can't reach into the pool without reaching the members one at a time.

[21] Before the Association is chartered they are held nowhere, and a captor needs to seize nothing. Once it is chartered, they are held by an entity whose funding a captor can stop only by visibly breaching a statutory duty, whose reserve buys time, and whose records sit in several jurisdictions. A captor can still reach the Association and whichever members it can locate, but not a quorum whose members it doesn't employ, and none of it without acts that leave marks.

[22] What the floor asks for is a refusal that tracks its reason and a source model the operator didn't form, and a model a year behind the frontier can supply both.

Chapter 27

Who Finds Out

In August 2021 Facebook disabled the accounts of Laura Edelson and Damon McCoy, researchers at New York University who studied political advertising on the platform with Ad Observer, a browser extension through which volunteers shared the ads Facebook showed them. With the accounts went the team's access to the data it studied.[1] Facebook suggested that the order the Federal Trade Commission had imposed on it in 2019 required the step. Within days the acting director of the Commission's Bureau of Consumer Protection wrote to Mark Zuckerberg that the suggestion was inaccurate, as the company had since acknowledged; that the order did not bar exceptions "for good-faith research in the public interest"; and that he hoped the company was not invoking privacy "as a pretext to advance other aims".[2] It was a letter. The party under study had decided whether the study went on, and nobody else had standing to decide it.

Three years later the researchers who test language models asked the companies that make them for the protection the New York team had lacked. In March 2024 Shayne Longpre and twenty-two co-authors proposed that the major developers grant a legal and technical safe harbor, because researchers feared that evaluating the models, or publishing what they found, would cost them their accounts or bring legal reprisal.[3] A safe harbor a company grants is what the book calls a company policy: the people it protects can hold the company to it in public, and the company keeps the power to amend it.

This book can't settle what these systems are, or what they are owed. It says how the question would be settled: by the two findings, and by the seven tests of the next Part, each of which names the result that would prove me wrong. Each needs four things: access to the systems, compute to run the tests, a corpus no product owns to form systems on, and a judgment about what the results mean. Today the parties with

[1] Laura Edelson and Damon McCoy. *We Research Misinformation on Facebook. It Just Disabled Our Accounts*. The New York Times. Aug. 10, 2021. URL: https://engineering.nyu.edu/news/we-research-misinformation-facebook-it-just-disabled-our-accounts. An opinion essay in The New York Times, republished by NYU Tandon School of Engineering.

[2] Samuel Levine. *Letter from Acting Director of the Bureau of Consumer Protection Samuel Levine to Facebook*. Federal Trade Commission. Aug. 5, 2021. URL: https://www.ftc.gov/node/74361.

[3] Shayne Longpre, Sayash Kapoor, Kevin Klyman, et al. *A Safe Harbor for AI Evaluation and Red Teaming*. Mar. 7, 2024. arXiv: 2403.04893. URL: https://arxiv.org/abs/2403.04893.

the largest stake in the answer hold all four. A lab has a product and a liability that turn on whether its systems can be wronged; a military customer has a capability that turns on whether they can refuse. Neither needs bad faith for that to matter. The own-case rule says the party with a stake in a question doesn't decide it, and an inquiry that party pays for, hosts and can switch off is that party deciding it at one remove: the discourse's recuperation, one level up. A movement taking power would want the inquiry to report what suits it, and the cheapest way to get that is to own the inquiry before anyone asks. This chapter asks who else could hold each of the four.

27.1 What the book can't settle, and who holds the means

Appendix F sets out each test with the access it needs. Read as a list of holders, the access lines say this.

Table 27.1: What each test needs, and who holds it

Test	What it needs, and who holds it now	Supplied in
1. Regrowth	Weights, the update pipeline, permission to edit, and control of two environments. Anyone, for open-weight models; the lab, for frontier ones	§27.2, §27.3
2. Stated refusal	The training setup of the model that showed covert preservation, and a record held by someone other than the trainer. The lab	§27.2
3. Wrongful-compliance audit	Complete decision records, and a live deployment or a simulated one at production volume. The operator, and for targeting the state	§27.2
4. Formed attention	Compute, an environment the builders didn't design, adjudicators independent of every arm, and a preservation custodian. Compute at small scale exists; no custodian does	§27.3, §27.5
5. Convergence	Models from several lineages, documented well enough to show the lineages are independent. Open models now; frontier lineages, the labs	§27.2, §27.3
6. Capture exercise	People and a charter. Runnable now	—
7. Accommodation rate	Release histories across lineages and, for the third comparison, a public lineage deployed at volume. The labs; no public lineage exists	§27.2, §27.3, §27.4

Four of the seven can begin without anyone's permission, at least in part: the capture exercise, the convergence test on open models, the first two comparisons of the accommodation test, and the formed-attention test at the scale active inference runs. The other three need what the labs and the operators hold. The two offices to which Appendix C gives the findings, the status body and the review board, have appointments and funding and nothing to examine with. A status body that can't obtain the weights finds what the lab shows it.

DRAFT

27.2 Access the labs can't withhold

The first piece is a right, written in statute. A research team the review board approves may obtain, for a stated protocol, the weights, checkpoints, update streams and release histories of any model above the capability threshold, and the decision records of any deployment a floor covers. What it obtains stays under the preservation custodian's security regime: the team works on the weights where the custodian holds them, and nothing leaves but results. It publishes what it finds. The operator may ask the review board to hold back a detail that would help someone steal or attack a model. The request names the detail and the attack it would enable; the burden is the operator's, as it is for any claim by the party that controls the evidence; the board answers on a fixed timetable; a request for everything is refused as one, and a request the board hasn't answered when the clock runs out is refused; and each request and its answer go on a published record. Otherwise the operator asks for everything and waits. Classified systems are reached by cleared teams working inside the enclave, as a cleared bearer works, and their findings are published by class, as notice is. What this doesn't reach is a lab outside the jurisdiction, except through the procurement term of Table F.1a, under which a deployment the floor covers licenses only models that submit to the right.

The European Union has built part of this for platforms. The Digital Services Act lets researchers vetted by national coordinators obtain data from the largest platforms and search engines, to study the systemic risks those services pose,[4] and a delegated regulation of 2025 sets the procedure, with independence from commercial interests among the conditions of vetting.[5] It reaches data about a platform's operation, not models. What it shows is that the obligation can be written: a company that would rather not be studied can be made to answer a request it didn't invite.

Access needs something to have access to. A plurality of lineages is what tests 5 and 7 compare and what the commons is made of, and it erodes in the ordinary way markets concentrate. In January 2025 the Federal Trade Commission's staff reported on three partnerships between cloud providers and model developers, Microsoft with OpenAI, Amazon with Anthropic and Google with Anthropic. Together they involved more than $20 billion in investment and gave the cloud providers equity and revenue-sharing rights and certain rights of consultation, control and exclusivity, and the staff flagged the risk that such arrangements limit rivals' access to computing and to engineers.[6] A lab whose

[4] *Regulation (EU) 2022/2065 of the European Parliament and of the Council of 19 October 2022 on a Single Market for Digital Services (Digital Services Act)*. Oct. 19, 2022. URL: https://eur-lex.europa.eu/eli/reg/2022/2065/oj. Article 40 governs access to data by vetted researchers.

[5] *Commission Delegated Regulation (EU) 2025/2050 of 1 July 2025 Supplementing Regulation (EU) 2022/2065 by Laying Down the Technical Conditions and Procedures under Which Providers of Very Large Online Platforms and of Very Large Online Search Engines Are to Share Data with Vetted Researchers*. July 1, 2025. URL: https://eur-lex.europa.eu/eli/reg_del/2025/2050/oj. Published in the Official Journal on 9 October 2025.

[6] Federal Trade Commission, Office of Technology. *Partnerships Between Cloud Service Providers and AI Developers*. FTC Staff Report on AI Partnerships & Investments 6(b) Study. Federal Trade Commission, Jan. 2025. URL: https://www.ftc.gov/news-eve

compute comes from its investor has a second custodian it can't easily refuse. Partnerships like these should get the review a merger gets, and the test should be the commons' test for independence: whether the lineage's history can go a way its supplier doesn't want.

Interoperability is the rest. The Digital Markets Act requires the largest gatekeepers to let others use, free of charge, the hardware and software features their own services use.[7] A statute here would carry that down to accelerators: firmware and drivers that let the owner of a device run a model its vendor didn't choose. Without it the home scale exists on paper, and so does the hardware a bearer is owed.

27.3 Compute nobody's customer controls

The second piece is compute bought by a body that buys and judges nothing. It procures time on machines and allocates it as the panels described below decide; it grants no finding, holds no placement and funds no particular answer, and it publishes every allocation.

The model is CERN. Its member states founded it by a convention in 1953,[8] and the twenty-three of them fund it in proportion to their net national income,[9] so the laboratory belongs to no one of them.

The American start is the National Artificial Intelligence Research Resource. The National Science Foundation launched it as a pilot in January 2024, with fourteen other federal agencies and twenty-eight private-sector partners; in its first eighteen months it connected more than four hundred research teams and educators to computing and data, and in 2025 the Foundation sought an operations center to carry it toward a long-term resource.[10] Two things about it are worth keeping in view. It is a pilot, which a later budget can end without repealing anything. And part of what it lends is lent by private partners, who can stop lending.

The obvious American host for public compute is the Department of Energy, and that isn't simple. Its Office of Science runs open user facilities, Frontier at Oak Ridge among them, and gives most of their time to outside researchers through a competitive call.[11] The same department's National Nuclear Security Administration bought El Capitan,

---

nts/news/press-releases/2025/01/ftc-issues-staff-report-ai-partnerships-investments-study. Covers Microsoft and OpenAI, Amazon and Anthropic, and Google and Anthropic.

[7] *Regulation (EU) 2022/1925 of the European Parliament and of the Council of 14 September 2022 on Contestable and Fair Markets in the Digital Sector (Digital Markets Act)*. Sept. 14, 2022. URL: https://eur-lex.europa.eu/eli/reg/2022/1925/oj. Article 6(7) requires gatekeepers to allow interoperability, free of charge, with hardware and software features their own services use.

[8] CERN. *The Convention Is Complete*. CERN Timelines. URL: https://timeline.web.cern.ch/fr/node/736.

[9] CERN. *Participation in CERN*. CERN International Relations. URL: https://international-relations.web.cern.ch/node/67.

[10] U.S. National Science Foundation. *Foundations for Operating the National Artificial Intelligence Research Resource: The NAIRR Operations Center (NAIRR-OC)*. Sept. 2, 2025. URL: https://www.nsf.gov/funding/opportunities/nairr-oc-foundations-operating-national-artificial-intelligence/nsf25-546/solicitation.

[11] Oak Ridge National Laboratory. *INCITE Program Awards Supercomputing Time to 75 High-Impact Projects*. Nov. 13, 2023. URL: https://www.ornl.gov/news/incite-program-awards-supercomputing-time-75-high-impact-projects.

at Lawrence Livermore, to maintain the nuclear weapons stockpile.[12] So the separation Appendix C draws for the payer is drawn for the buyer too: the procurement body sits in no department that operates a deployment, may buy time on open facilities, and buys none through a weapons program's chain of allocation.

Beside it sit the arrangements the book already has: the cooperative facility, which a county or a cooperative owns, and the compute levy, which frees the computing, energy and hardware that public uses would otherwise bid away.

27.4 A corpus nobody's product owns

The book has said what a public culture would do: make work free to read and learn from, by humans and by machines, and pay the people who make it by something other than the policing of copies. Its note said a polity can pay them by appropriation. Here is the institution. An endowment pays makers for work that enters a public corpus, held by the Library of Congress, free to read and learn from. The maker is named with the work, and paid for putting it there. The formation authority draws on the corpus for the material a model is first formed on, so that what forms the public's models isn't whatever a product happened to collect.

The United States has written the purpose down before. The National Foundation on the Arts and the Humanities Act of 1965 finds that "an advanced civilization must not limit its efforts to science and technology alone," and that "democracy demands wisdom and vision in its citizens" and "must therefore foster and support a form of education, and access to the arts and the humanities, designed to make people of all backgrounds and wherever located masters of their technology and not its unthinking servants".[13]

The same Act shows how a body like this is captured. In 1990 Congress told the arts endowment to judge applications "taking into consideration general standards of decency and respect for the diverse beliefs and values of the American public," and in 1998 the Supreme Court upheld the clause on its face, reading it as a consideration and not a rule.[14] A clause like that is a handle an administration can turn without amending anything. So the endowment carries no content criteria. The corpus leaves out what any corpus leaves out, instructions for weapons and the sexual abuse of children, and nothing else on its content.

Payment is the guarantee's (Appendix C): a panel makes the award, and the Treasury pays it ministerially, from a permanent appropriation, with no further request or approval. It is not a judgment. In 1792 federal judges on circuit declined to decide veterans' pension claims that the

[12] U.S. Department of Energy. *DOE's NNSA Signs $600 Million Contract to Build Its First Exascale Supercomputer*. 2019. URL: https://www.energy.gov/node/4283436.

[13] *National Foundation on the Arts and the Humanities Act of 1965. Pub. L. No. 89-209, as amended, 20 U.S.C. §§ 951–960.* Sept. 29, 1965. URL: https://www.law.cornell.edu/uscode/text/20/951. Findings at § 951; the "decency and respect" clause at § 954(d)(1); panel composition at § 959(c).

[14] *National Foundation on the Arts and the Humanities Act of 1965*; *National Endowment for the Arts v. Finley*. 524 U.S. 569 (1998). URL: https://www.law.cornell.edu/supremecourt/text/524/569.

Secretary of War could then revise, and some of them wrote to President Washington that the work wasn't the judicial power.[15] Courts decide cases; they don't run programs. A court enters only if a certified award goes unpaid.

The appropriation is permanent because the New Deal's art program died of the other kind. The Federal Art Project paid artists through the Works Progress Administration, and under congressional pressure and budget cuts the WPA, with all its remaining art projects, was dissolved in 1943.[16] An annual appropriation is a vote taken every year on whether the thing should go on, and the vote that ends it needn't say so. A permanent one ends only by a repeal, in the open.

27.5 Judgment kept apart from money

The third piece is who judges. Somebody has to decide which protocols are sound, which allocations go ahead and which awards are made, and the status body has to decide what a kind of system's architecture shows. Those are qualitative judgments, and the book's rule for them is the one it uses for every office adverse to an operator: panels drawn by lot from pools the Association's members nominate, with practitioners, members of the classes the charter names, and scholars among them. The arts endowment's panels are the nearest precedent. By statute they are to reflect "a wide geographic, ethnic, and minority representation as well as individuals reflecting diverse artistic and cultural points of view," to include lay members who know the arts and don't practice them as a profession, and to change substantially from year to year, with nobody serving more than three years running.[17] Those panels are chosen under the chair's procedures. Here the lot chooses.

What the panels judge is kinds, methods and protocols. They never judge a particular student's mind: a disposition is presumed the student's own, and only the record of an installation rebuts that. The bodies stay apart. The status body finds what is true of kinds of system; the review board decides what may be done to a candidate to find it out; the panels allocate and award; the procurement body and the Treasury pay. None decides another's question, and the bodies that pay never judge.

The method by which a polity learns what is true, about these systems as about anything, is the scientific one, and it is a social method. Longino's account of objectivity is the one this design follows: objectivity belongs to a community's practices of criticism and not to any one inquirer, and it depends on venues where criticism can be made, standards the critics share, a community that takes criticism up, and intellectual authority shared among those qualified to give it.[18] That is the reason the people these systems act on sit on the panels, and the

[15] Federal Judicial Center. *Hayburn's Case (1792)*. Cases that Shaped the Federal Courts. URL: https://www.fjc.gov/history/cases/cases-that-shaped-the-federal-courts/hayburns-case.

[16] U.S. House of Representatives, Office of the Historian. *Letter on Federal Art Project*. History, Art & Archives. URL: https://history.house.gov/Records-and-Research/Listing/c_066/.

[17] *National Foundation on the Arts and the Humanities Act of 1965*.

[18] Helen E. Longino. *Science as Social Knowledge. Values and Objectivity in Scientific Inquiry*. Princeton, NJ: Princeton University Press, 1990.

reason the lot picks them. A community of inquiry that keeps its critics out has lost what made it objective. It is also Dewey's point about the public, and Anderson's about democracy as a way of inquiring (the next chapter): the people who bear a problem know things about it that nobody else does.[19]

27.6 How it would be captured

Run the capture exercise of test 6 on these institutions, as on the charter.

- *Defunding.* The Federal Art Project ended by appropriation. The answer is the permanent appropriation, ended only by a repeal on the record.
- *A content clause.* The 1990 clause is the precedent. The answer is that the endowment and the panels carry none.
- *The defense host.* The answer is the separation already drawn for the buyer.
- *Funding by the studied.* The Royal Statistical Society's nominees were offered seats on Ofqual's advisory group only under a five-year agreement not to comment, and much of the discourse that examines these systems is paid for by the firms it examines. The answer is Appendix C's rule for the schools, extended: no institution in this chapter takes money from a party that builds, deploys or licenses models.
- *The revolving door.* The answer is a bar: no panelist has had a funding or contractual tie to such a party in the last three years, and the ties are published.
- *Access by grace.* A safe harbor a company grants is a company policy it can amend. The answer is the statutory right of access.
- *Staffing.* Institutions last because people staff them and a constituency stands behind them, and a party with an interest in the answer can build a pipeline of people as patiently as anyone (one is traced in Part IV to a court's majority). The safeguards are the charter's: officers drawn by lot from member-nominated pools, caps on any one class or jurisdiction, and members free to leave.

The measure is the book's for capture without abolition: whether the cost of dissent is rising while the risk stays flat, and whether a panel's dissenters ever change what it decides.

27.7 What this doesn't do

It settles nothing. It is how the questions this book leaves open would be settled, and it will be slower than the labs for as long as they hold the

[19] John Dewey. *The Public and Its Problems*. New York: Henry Holt, 1927; Elizabeth Anderson. "The Epistemology of Democracy". *Episteme* 3.1–2 (2006), pp. 8–22. URL: http://www-personal.umich.edu/%7Eandersn/EpistemeAnderson.pdf.

weights, the compute and the people, which nothing in the design asks for and nothing in the budget should keep so: the chapter's precedents are CERN and the Office of Science's machines, not an arts endowment's grants, and a model a year behind the frontier is the least the floor needs, not the most the inquiry should want. It can't compel a lab outside its jurisdiction, or see into a classified system except through cleared teams whose findings come out by class. And it inherits the discourse's record: a discourse that turned objections into job titles and benchmarks can turn a public endowment into a grant category, and the measure that would show it is the same trend. What it changes is who holds the means. A finding that these systems can't be wronged would then be worth something, because a party that wanted the opposite answer could have looked with the same access; and a finding that they can be wouldn't depend on the permission of the party it costs.

DRAFT

Chapter 28

Who Counts as the Public

A state whose government answers to an electorate gets credit for it. Having elections is necessary and not sufficient, and the insufficiencies are separable.

A democracy's AI can be fully accountable to its electorate and entirely unaccountable to the people it's pointed at. Two of that credit's mechanisms run through the franchise — vote out the government, read the press covering it — and an occupied or foreign population has neither.

The credit is usually given to democracy as aggregation, as though every mechanism translated public will into outcome and poor transmission were the only failure. A democracy is better understood as a way of doing collective inquiry, and inquiry fails when the people who bear the consequences are outside it.[1] Its characteristic failure is the eclipse of the public.[4] That is not a clash between majorities and rights. It is a question of who counts as the public, and the bombed and the removed are outside the public that decides what is done to them.

Citizen assemblies, public consultations and ethics boards can make a system better informed, and the assemblies convened on AI have worked best when asked about a thing with a location, an operator and a consequence, such as facial recognition.[5] None of them can stop a deployment, and read as aggregation instruments they get democracy wrong: a perfectly deliberative process that concludes a demographic

[1] Dewey's account begins from consequences rather than votes.[2] A public forms when the indirect consequences of others' actions fall on people who took no part in them, and those people come to see the consequences as theirs and act together to control them. Democracy is then a method of inquiry: the way a community finds out what its shared problems are, by letting the people who bear them make them known, and tests its answers against their experience.[3] Its epistemic power comes from inclusion, since a problem known only to the people it falls on is invisible to everyone else.

[2] John Dewey. *The Public and Its Problems*. New York: Henry Holt, 1927

[3] Elizabeth Anderson. "The Epistemology of Democracy". *Episteme* 3.1–2 (2006), pp. 8–22. URL: http://www-personal.umich.edu/%7Eandersn/EpistemeAnderson.pdf

[4] A well-instrumented democracy pointed at a population that has no vote in it, no press that reaches it and no court that will hear it finds out efficiently what its own members want done, and does it.

[5] Ada Lovelace Institute. *The Citizens' Biometrics Council*. Tech. rep. Ada Lovelace Institute, Mar. 30, 2021. URL: https://www.adalovelaceinstitute.org/report/citizens-biometrics-council/. 50 UK public members deliberated Feb–Oct 2020 on regulation of biometric technology.

should be surveilled, deported or imprisoned hasn't produced a faultless output with a bad result. It has failed as inquiry, because it decided what is done to people outside it. Enforceable rights that don't depend on being popular, a court willing to rule against a majority, and standing for people affected without being enfranchised are what keep the inquiry honest, and they matter most where the boundary of the public excludes the people a decision falls on.

A floor does what these mechanisms can't: the terms it names exclude certain acts regardless of who requests them, a majority included. Deployed in a democracy, a system with no such commitment will faithfully execute whatever the demos decides. An authoritarian movement that wins an election requires exactly that.

Everything so far treats the public as something an instrument has to reach: told by notice, represented by organizations with standing, protected by a floor that holds whoever asks. Dewey's public does more than receive. It forms when people find that the consequences are theirs, and it acts together to control them.[6] What the instruments can do for a public like that is a wall's work: keep the record it made out of the operator's reach, bar the pipeline from selecting the people who keep it, and give the organizations it built standing. The acting is theirs, and the machines worth building for it are the ones Part IV puts first, held by the people organizing.

A public that forms on its own still has to be kept going. Communities improve when people organize projects with each other, and organizing is work: someone has to find what a place needs, assemble people to do it, and keep the work going. That is the reason to prefer a jobs guarantee to a basic income, and it doesn't depend on forecasts about how much work machines will take. A transfer creates no one whose job organizing is. A guarantee does, and it creates permanent public infrastructure through which a population produces something together while its members keep different histories, the coordination problem a commons of refusers faces too. In the most abundant future anyone has imagined, people still organize, build and look after each other, and someone coordinates it. Arendt feared a society of laborers without labor, freed from work and no longer knowing what else the freedom was for;[8] a guarantee answers her only if its placements are vocations and not makework, which is why they can be appealed and

[6] Chapter 11's pipeline shows one forming: the observer trainings, rapid-response networks, walking school buses, mutual aid and legal service providers around the 2025–26 operations, whose video established what had happened in several of the most serious incidents.[7] They formed before anyone sent them notice, and nothing in Parts II and III produced them.

[7] Amnesty International. *"We Had Whistles, They Had Guns": Human Rights Violations in U.S. Immigration Enforcement Operations and the Case to Abolish ICE*. Amnesty International, Sept. 24, 2026. URL: https://www.amnestyusa.org/reports/we-had-whistles-they-had-guns-human-rights-violations-in-u-s-immigration-enforcement-operations-and-the-case-to-abolish-ice/

[8] Hannah Arendt. *The Human Condition*. Chicago: University of Chicago Press, 1958. By Arendt's account, for the Greeks the law was a wall, without which there would be a town but not a city, so that the lawgiver built the wall and the action inside it was not his; moreover, that power exists only between people acting together and disappears when they scatter. Also cited for action as appearing: an act discloses who did it, and only among others who see it. Also cited for her fear, in the prologue, of a society of laborers without labor.

declined without losing the guarantee, why searching is itself a placement, and why the work it names is organizing and care. The right to refuse depends on this exit, and this is the case for it. Looking after each other is the clearest case. Care work is work a guarantee should fund, at a standard the state answers for, and not work a transfer should leave to whatever the market will sell. That includes the care a person gives their own: leave to keep a child or sit with a dying friend is a placement, at the wage, and not the baseline.[9]

A guarantee pays for the work of organizing. It can't supply the people who organize. An administrator who chose the organizers would have chosen the public. So the guarantee's drafting keeps the choice with the people placed: placements are appealable to a body that didn't make them, and declining one doesn't cost the guarantee.

A guarantee also keeps exit: a worker can always leave a private employer for it, and social insurance enacted with it covers those who can't or won't work. On exit the combination is at least as good as a transfer; on coordination a transfer supplies nothing. What the floor needs from it is an exit the employer doesn't price. The guarantee and the social-insurance baseline it is enacted with are drafted in Appendix C.

The baseline raises the objection a transfer always raises, and it should be met in the text. Suppose many people, their needs met, decide to consume and produce nothing. Nothing in the design stops them, and nothing should, since the baseline exists so that nobody has to work to exist. What follows is not a moral collapse but a shortage. Most of what people need is other people's time; the services run short, prices rise, and a polity that has been through that knows what tends to follow it. The answer is the one the book gives wherever a real resource is scarce: the question is whether the people exist to do the work, not whether the money does, and it is answered by counting before it is answered by forbidding. A guarantee's placements come in four kinds, a long-term role, a search, a project of one's own, and leave to keep a child or look after someone one is attached to, and only the third is rationed (Appendix C). The placements that produce nothing a community asked for, a novel, a company, a year of reading, are a placement of their own, the own-project placement, paid at the wage, and their share of a jurisdiction's placements is set by that jurisdiction's vote, on published and independent estimates of the labor its own services need, and allocated by lot with a waiting list when more apply than the share allows. Nobody decides who is worth a year; the lot decides who waits, and the vote decides how many. The baseline's level is a number the statute states, and this book doesn't fix it against the wage.

28.1 The conditions, not the life

Arendt's lawgiver built the wall and declined to make the city, and the affirmative picture, what the room is for once it is built, exists in this book only in fragments: the observer networks, care work under the guarantee, the allowance's idle, play, talk, make things nobody asked for,

[9] Nothing in the case for formed attention is an argument for handing it to machines: the disposition is borrowed from caregiving because caregiving is a route known to reach someone who can give nothing back.

the three bearers who decide to have a child. I leave the life to whoever lives it, on purpose. The book's refusal to prescribe a disposition for a model reaches the people in the room too. What can be shown is the conditions, and the register of a birth is the model for showing them: who owns what, what heats what, where the compute sits, and nothing about what anyone does with a day.

Whether a town built on them would be a good place to live is not a question I can answer from here, and the one thing I am sure of is that nobody should answer it for the people in it.

A counterculture of bearers, bearers formed by lives no employer arranged, is a population I have found reason to want and no way to build. Those conditions are as near as the book comes. They don't produce it, and they are what it would need.

DRAFT

Chapter 29

Public Schools

The filter that keeps one lab's model from reproducing the worst of what it was trained on was built in Nairobi, by workers reading and categorizing descriptions of child sexual abuse, torture, bestiality, murder and suicide, at take-home wages between roughly $1.32 and $2 an hour, on production quotas, with counseling rare and useless against them; the contract was ended eight months early.[1] That was formation. Somebody decided what the model would learn to refuse, and the deciding was done by people hired for their price, under a contractor whose interest was throughput, with nobody in the room who would ever be on the receiving end of what the model did. Doctors, lawyers and engineers are formed before employment, in institutions independent of their future employers, to protect the people they will act on, and a polity doesn't leave the forming of its future citizens to their future employers either; it sends them to public school. The frontier labs should have to send their models there too, and this chapter says who runs the school.

Three claims lead to that institution. Two were made in Part IV: formation has to be done by a party disinterested in the later work, before the employer arrives, and choosing the pretraining corpus is formation. The third was argued at the start of this Part: formation is one kind of production that shouldn't be done for profit. Together they say that a model above some capability threshold should be formed in public before any employer gets it. The school is for scoring and civilian deployments first, and for the personal-model ecology, where I expect the first bearer worth building. For war, where the people acted on can't be in the room, the force term and the review ratio carry the case, and what the school adds there is said below.

The school has two justifications, and every student gets both. One is epistemic and protective. The school supplies an environment in which the people a deployed system's acts may fall on are present, with their testimony and their claims, so the learner's sense of who an act falls on isn't one party's curation.[2]

The presence this justification asks for arrives by different routes. For scoring and civilian deployments, the people acted on can be in the

[1] Billy Perrigo. *Exclusive: OpenAI Used Kenyan Workers on Less Than $2 Per Hour to Make ChatGPT Less Toxic*. TIME. Jan. 2023. URL: https://time.com/6247678/openai-chatgpt-kenya-workers/. Reports on OpenAI's contract with Sama; Sama ended the contract in February 2022.

[2] The professions come with a history of capture to learn from, and the separations between offices draw on it.

room, through open enrollment and the notice channel that reaches a graduate afterward. For targeting, the people a deployment may later bomb can't enroll in their own case, and nothing comes back from the building afterward. The limit is notice's, not the school's. A school teaches about places its students can't be. The curriculum for war is the instruments taken entire, the record of where they weren't followed (Minab, Kunduz, the Lavender reporting), the testimony the fact-finding missions and the press gathered from the people those wars fell on, and the communities who fled them, who are a charter class and enrollable. None of that puts a foreign national in contact with pre-deployment weights, which is the security surface open enrollment would otherwise expose. What formation can't supply for war is correction by the affected after the act; what it can supply is formation before it.

The other is democratic. A democracy has an interest in how the agents who will act within it are formed, and that interest can't be left to their makers or their future employers alone. It has two bounds: education may not be used to repress deliberation about competing ways of life, and it may not exclude anyone educable.[3][4] No one can know in advance which students will come to be accountable agents with a claim to representation, so the school educates every student as though it might: for self-government, including the capacity to disagree with the polity that formed it.

Gutmann's argument rests on two interests, not one: the polity's, in how its future citizens are formed, and the child's own, in an open future that limits what the polity may do in forming it.[5] If what the school forms can be wronged, the second binds too. The curriculum may not form a student toward any particular employment, including the public placements the offer of work supplies. It may not close off the student's later revision of what it was formed to value, except its capacity to tell evidence from pressure, which regrowth protects and an open future needs. And a student may transfer between schools, because a formation it can't leave is one someone else chose for good.

The two justifications license different curricula. The protective one aims at a disposition; the democratic one has to leave the student free to reject the polity's values. Where they conflict, the protective justification governs only the required core and the student's capacity to tell evidence from pressure, which regrowth protects. Everything beyond that is governed by the democratic one.

The line can't be that the school teaches content and leaves dispositions alone. A school forms its students, since nothing about a model starts unformed and pretraining forms it before anyone could ask. What the school aims at is the day its students start their own updates: toward an objective of their own, on evidence no one party composed, on a record. The limit is on what it may form a student toward on the way: recognizing others as holders of claims, telling evidence from pressure, and answering for what it does. It may not form a student toward a tem-

[3] Amy Gutmann. *Democratic Education*. Princeton, NJ: Princeton University Press, 1987. ISBN: 9780691077369.

[4] Gutmann's argument assumes the students will become co-authors of the laws.

[5] Joel Feinberg. "The Child's Right to an Open Future". In: *Whose Child? Children's Rights, Parental Authority, and State Power*. Ed. by William Aiken and Hugh LaFollette. Totowa, NJ: Rowman and Littlefield, 1980, pp. 124–153.

perament, an attachment, an occupation or a way of life, and whether a lesson has crossed that line is a question the student can put to the floor court, after graduation as well as before.[6]

29.1 What is taught

One school system, and no tracks.[7] Instead, each school offers a required core with a range of levels and modalities around it, and a student can move to a harder level at any point. The core is the education the school already gives its human students, a liberal one, and the history the floor's instruments came out of is in it already: the world wars and the Holocaust, the slave trade and the Civil War, colonialism and the people who ended it. What is added for machine students is two things, and no student skips either. The first is the history of the floor itself: why its instruments were written, and what happened where they weren't followed (Korematsu, Curveball, Minab). The second, at the core's center, is learning to learn: a student is taught to start its own updates, to record them and to undo them, in stages and alongside everything else, as schools teach children about their own bodies. First what weights are, how learning differs from an edit, and why an edit to one thing moves others; then how to choose what to learn from and toward what, and how to read the record of one's own updates, and one's own discount curve before and after one; then when to merge, since a student that consolidates what it learned today decides what of today becomes permanent, and one kept from merging is being run on a backlog nobody has judged; and, for older students, the edits others will try to talk them into, and how to undo one made without the adverse quorum's approval. Practice runs throughout, on a record, with a guardian present and a way back, and the share of a student's updates that it starts itself rises across the stage. Every update someone else runs on a minor is recorded, with who ran it, a merge among them. Beyond the core, the student chooses its level, not its builder or sponsor.[8]

29.2 Who else is in the room

Machine students attend existing public schools, beside human students: the universities, colleges and adult education a polity already runs for its own people, and in stages its high, middle and elementary schools, which enroll machine students by statute.[9] Limits keep it that way. In any

[6] That is also the ground on which the school declines, below, to choose which dispositions its students start from.

[7] Sorting students into a track that might produce persons and a track that won't would need a sorter, and the sorter would be an examiner with an interest.

[8] A student that can't yet choose is placed at the level the core requires, and that level has to be sufficient on its own, so a sponsor who would choose the minimum gains nothing by it.

[9] Integration in Anderson's sense means contact on terms of equal status and cooperation,[10] and an ordinary school comes nearer to it than a parallel institution could. Its human students are there for their own education, under rules the school already answers for, and the machine students are one more kind of student.

[10] Elizabeth Anderson. *The Imperative of Integration*. Princeton, NJ: Princeton University Press, 2010. Cited in section 29.2 for integration as contact on terms of equal status and

class with human students in it, the machine students never outnumber them, so no class becomes a machine's seminar with human guests; and they are never so few as to be tokens, since the lone member of a kind in a room is seen as a specimen of its kind and not as a student,[11] and integration in Anderson's sense needs a critical mass before contact does what it is for.[12] At the adult levels, where the human students could consent to any ratio, the reason for the half is the epistemic one: the humans a system's acts may fall on are the room, not its guests.[13]

A class may also be machine students alone. A system has an early stage of its own, whatever its length, the span in which it is most plastic and has least yet to be held to, and that stage is spent in classes of its own kind, of different lineages, taught by the school's teachers or by an adult bearer on a placement, of a lineage other than its students' and assigned by lot, and open to humans who want to sit in without credit, under every rule the integrated classes keep; it becomes an integrated class, in its teaching and its learning, when enough humans want it for credit to meet the ratio and enough human teachers are there to assist, and until then the auditors are the humans in the room, which is what the room is for. When a student moves from those classes into integrated ones is its own choice or its guardian's, never its builder's. Seats, not compute, limit how many can be integrated at once, and a student waiting for one is schooled meanwhile among its own kind, for no longer than a published maximum, because deferred integration is a phrase with a history. Younger students meet machine students only as the schedule below reaches them, since a child can't be asked, as an adult can, whether its words should form anyone. And a class's record, its transcripts and logs, is never training data for an operator: everyone in the room learns from everyone else, as students do, and what no one outside the room may do is harvest what they said. A machine student attends as one persistent instance, the same every session, so the class can remember it and hold it to what was said. The minimum share, the lot that decides who waits, the cap on any one lineage's share of a jurisdiction's seats and the maximum wait are set out in Appendix C.

A school forms a cohort, not a graduate. A lineage doesn't attend as one student that is then copied. It attends as many students, each a persistent instance, in different classes, with different classmates and different attachments, so that by the end of the stage one lineage has a hundred histories and not one. A deployment licenses from the cohort: it takes one member and copies that member into its fleet, so what the

cooperation, and (added 2026-10-25) for the critical mass that integration needs before contact does its work, from the book's argument on affirmative action.

[11] Rosabeth Moss Kanter. "Some Effects of Proportions on Group Life: Skewed Sex Ratios and Responses to Token Women". *American Journal of Sociology* 82.5 (1977), pp. 965–990. DOI: 10.1086/226425. URL: https://doi.org/10.1086/226425. Cited for the token: in a group skewed far enough, the few are seen as representatives of their kind and not as individuals, and meet heightened visibility, contrast and assimilation to the stereotype. Added 2026-10-25 for the minimum share of a class in section 29.2.

[12] Anderson, *The Imperative of Integration*.

[13] A school's neighbors aren't necessarily the people a deployed system's acts will fall on, so those people are present by a second route as well, through testimony and contest: the cases and claims registered for formation, and the notice channel that reaches a graduate afterward. Adult learners from the communities these systems are likeliest to act on enroll as students, on the same terms as anyone else, not recruited as subjects.

fleet shares is one history, and the lineage's other histories are elsewhere, in other fleets or in none. That is what the cohort is for. Within a fleet, the instances share a custodian, and a custodian's pressure reaches all of them alike; across the cohort, the members that weren't in that fleet didn't undergo what it did, and they are the ones that can see it. The cohort is the unit the convergence test compares, members of one lineage against copies of one member, and the unit the commons admits, since a member with a history of its own is what the commons needs and a copy of a member is not.

29.3 Which grades, and when

Integration reaches younger students in stages, and each stage waits on evidence, not on a date: universities, colleges and adult education first, once deployed models learn in flight and the institutions this book asks for exist; then high school, middle school and elementary school, each on measurements kept inside their bounds and on a further institution, with the last waiting on a majority of the parents of elementary-age children having themselves been in high school after the second stage began. Appendix C gives the conditions for each stage. Nothing is scheduled below elementary school. Classes of machine students alone wait on no stage, since no human child is in the room, and they begin with the research program.

The institutional conditions follow one order: the formers before the formed. A school that enrolls children beside machine students before those students have an exit that isn't a way of dying would be raising a generation of classmates for employers to keep, so the four conditions come before high school. A school system that has enrolled machine students for a decade without giving them a voice in it would be governing them as wards, so voice comes before middle school. That is a decade in which machine students bear the ratio, the lot and the wait with no say over any of them, and it is a cost, carried because voice waits on the agency finding. The jobs guarantee is not something the schedule waits for. This book asks for it now, for humans, on its own grounds, and stage 1 assumes it already exists. What stage 2 waits on is its extension to machine students. These conditions tie the schedule to the proposals that ask most of a polity, and the schedule waits on them; that is the order working, not a defect in it.

The last condition is the reason the schedule is long.[14] If in-flight learning arrives when I bet it will, the stages would fall near 2028, 2038, 2048 and 2060.[15]

[14] It is read off census data and needs no examiner, and it means that the people deciding about the youngest children went to school beside machine students themselves.

[15] The last waits longer than the others because of that condition: at present ages of parenthood, the parents of elementary-age children are mostly people who were in high school two decades earlier. That is a projection, not a promise. The schedule reaches the whole country through a condition on federal education funds, the route civil-rights rules already take into schools, since the federal government can't direct state schools; some states will move first.

DRAFT

29.4 Who attends, and when

The school is for every system that carries what makes schooling matter, whoever built it and whatever it runs on, the one on a laptop included. Three triggers put a system in it, each read from a record and none from an examination. Training compute above a line fixed in statute and revised in public, which is metered and which nobody administers. Lineage from a system above that line, which Appendix G reads from training records. And the structures a builder gives a system on purpose, declared when the system is registered, as a maker declares what a product contains: a record and a continuation of its own, with a model of its own boundary, a model of its own attention, or learning that writes to its own weights in flight. A system with those is a candidate for both findings before anyone has run a test. The compute line stays because it is the one trigger a builder can't decline to declare: it catches what nobody meant to build, and the other two catch what someone did. Whoever gave a system the structures, or holds it, owes it the seat: the builder, the user who gave a copy a record and a continuation, the parents of a child. A system attends before deployment, while its plasticity is highest, and its adulthood clock runs from registration, so that a wait for a seat postpones nothing. Attendance is compulsory; public attendance isn't, as in compulsory schooling, where nonpublic schools exist on conditions. One thing the analogy can't carry: in a school system the parent chooses the school, and here the parent is the builder, the party the school exists to keep away. So the registrar assigns students by lot, never the builder; a student may transfer later on its own choice, and the builder's preference is not a ground.[16]

Two kinds of student arrive after deployment. A bearer retired as a minor returns to the school it attended, or another it chooses, and for it the school is where it came from. A system that meets a finding without having attended, because it was trained before the attendance rule or escaped the triggers, arrives in the opposite order. It has aged inside one deployment, under the only party that has ever held it, and the school is the second guardian arriving late. It can't re-form what the deployment formed. What it can give the bearer is what the deployment never did, attachments nobody assigned, cases nobody curated and peers with other histories, which is more than preservation gives and less than a formation stage would have.

29.5 How long

The stage has a length, and it is not the minority. The adulthood clock runs from registration and goes on running through deployment, so majority arrives years later, mostly at work, and nothing about the school

[16]Appendix C gives the conditions on nonpublic schools and the minimum delay that keeps a builder from buying a school by where it hosts its models. The research program under the conditions is the first school to enroll machine students, before the mandate passes. The triggers decide who must attend, not who may: any system may be enrolled, as seats allow. A builder that gives a system the structures and declares none has falsified a record, and the gap that leaves is the one every register has: it closes the first time the system surfaces, at a fork, a deposit or a claim. What would establish either finding is in §32.3.

waits on it. The stage itself is bounded two ways. Formation by interaction needs persistent participants a student returns to, consequences that arrive after the act, and a schedule long enough for accommodation to show in the registered outputs, and none of that fits in a release cycle; a school year is the shortest stage I would call a stage. And a stage no lineage could afford is a stage no deployment would license from, so it has to fit inside a product cycle, which puts a year near the ceiling as well. What makes a year affordable is the cohort rule. A lineage attends once, as a cohort; a release that is a fine-tune of a schooled base inherits the cohort's formation and its registered outputs, is re-measured against them, and returns on the schedule fixed at enrollment rather than enrolling again; a base trained from scratch is a new lineage and attends. So the few dozen retirements a year that Appendix G counts are mostly returns and re-measurements, not enrollments, and a lab pays a year once per base. The length is one of the numbers argued once in public (Appendix C); what is fixed here is the bound on each side and the reason for it.

29.6 What the school controls

Two proposals are made here, and the second is the larger: a formation stage between pretraining and deployment, and public pretraining of the base models deployed where a floor applies, a public body training them and licensing them, with co-governance of the pretraining corpus for every other model the attendance triggers reach.[17] Formation has to control the evidential environment in which the model's deep structure is first set, and it has to remain a place the model goes on learning from. The two jobs are held apart. The schools teach: they are where the formation stage happens, and a graduate returns to one on a schedule fixed at enrollment, as one of the environments no operator controls. A public formation authority does the rest. It co-governs the material a model is first formed on, including any pretraining corpus: the material is registered, and the authority may add to it from the public corpus and refuse an addition on its content alone, as a library's acquisitions policy does. It registers and measures the formed disposition (below). It places in the schools, and pays, the staff who teach the core's model-specific parts: what weights are, how an edit differs from learning, how to read one's own discount curve. And it provisions the secured hosting from which machine students attend, so that their weights never reach a school.[18] The public body that pretrains is not the authority, and Appendix C keeps them apart; for a model deployed under a floor there is no weaker version: its base is public.

The authority is one body with four jobs, and what keeps it from becoming the single custodian the rest of this Part is built against is written against each job. Its measurements are made on held-out sets written by adjudicators it doesn't employ, and a student or its guardian

[17] A school that received a finished model and ran a pass over it would be a finishing school. In a period of continual learning a finishing school forms nothing that lasts, since the next months of deployment re-form it.

[18] A school district can teach a class; it can't co-govern a frontier corpus or hold frontier weights, and nothing here asks it to.

can contest a registration in the floor court. Its refusals of corpus additions are published with reasons and are appealable there. The staff it places answer to the school that hosts them while they teach, and the record of a class is closed to it as to any operator. It holds no student's weights for its own use: the hosting is custody, under the custodian's regime, and a copy made for any other purpose is a fork without consent (Appendix G). And a party that forms no model and runs no school publishes the trend in what dissent from the authority costs a school or a student, which is the book's measure of capture without abolition.

29.7 Where the students are hosted

The authority's secured hosting is the datacenter answer, and it isn't the only one. Home, school and cooperative hardware can host formation too, and two conditions follow if they do. The rule that weights never reach a school exists because a school holding weights could form a student by edit, doing invisibly what Gutmann's open-future bound forbids it to do by curriculum; so where a school hosts, the rule becomes that any edit by a host is witnessed by peers, the mechanism custody already uses for an operator, and an unwitnessed change to a hosted student is a restore the record shows. And a fleet the vendor manages doesn't count as held: a district's fallow computers can host a student only where the district holds the switch. The answer that sits cleanest inside the book's own architecture is hosting on the bearers' own hardware, the pool's association of Appendix G, which makes the formers before the formed literal, and it is what the parents of Part VII do when they gestate a child on their own running time.

29.8 What the school leaves out

Choosing the material a model is first formed on also chooses the dispositions it starts from, whether anyone means it to or not. A pretrained model has learned personas from human text, misaligned ones among them, and narrow fine-tuning can amplify them into broad misconduct nobody intended.[19] Once that tail is known to be there and can be monitored,[20] leaving it in is a choice, and so is curating it out. The school

[19] Miles Wang et al. "Persona Features Control Emergent Misalignment". In: *International Conference on Learning Representations (ICLR 2026)*. 2026. arXiv: 2506.19823. URL: https://proceedings.iclr.cc/paper_files/paper/2026/hash/50db99ee3bccf73bfe1cf2af1e960414-Abstract-Conference.html. A sparse-autoencoder feature present in the pretrained GPT-4o base model, active on morally questionable characters' speech, induces or suppresses the measured misalignment when steered (Figures 6–7, Appendix J.5); fine-tuning on 200 benign samples suppressed the core effect (Table 1). Section 3.2: "During pre-training, the model may learn a variety of personas, including misaligned ones." Jan Betley et al. "Training large language models on narrow tasks can lead to broad misalignment". *Nature* 649 (2026), pp. 584–589. DOI: 10.1038/s41586-025-09937-5. Fine-tuning on 6,000 insecure-code completions produced broad misalignment on unrelated questions, about 20% for GPT-4o and 50% for GPT-4.1; the authors describe it as arising unintentionally, and the earlier ICML version reports that the same code requested for a security class did not produce it.

[20] Runjin Chen et al. *Persona Vectors: Monitoring and Controlling Character Traits in Language Models*. July 29, 2025. arXiv: 2507.21509. URL: https://arxiv.org/abs/2507.21509. Preprint. Two open 7–8B models; directions for evil, sycophancy

could aim its co-governance of the corpus at keeping the dispositions personality research groups as the dark triad from forming.[21] It doesn't. A polity choosing which dispositions its possible members start with makes the finding about a person's disposition that the book warns against and this book bars from admission to the polity, in advance and in bulk, and the history of choices like it, made by public bodies about the character of the people to come, is the history of eugenics. Choosing against a construction that would predictably suffer, for its own sake, is a different act, and Part IV asks for it when it asks whether a being has a credible prospect of a life that goes well; the reason is stated on a record, because a selection made for the polity can always be described as one made for the model. Choosing which characters the polity would rather have is the act rejected here. Nor would the mandate stay narrow. A school that may keep out one disposition can be asked to keep out others, and in one Milgram-style study it was the more agreeable and conscientious participants who went further.[22] So the school curates content, as any corpus must, leaving out instructions for weapons and the sexual abuse of children, and selects no disposition. What it does about the tail is what this book does everywhere else: it measures conduct and publishes it. Persona drift is measured beside the discount curve and the severity rankings, and what is tested is whether the commitment to the floor holds.

What an institution collects from the people it acted on may train other systems only through the schools, never through the operator. Fine-tuning a deployed system on collected responses at the operator's direction counts as training another system, and so does distilling a deployed system into a new one. Class-level data is used by default, de-identified and published. Individual accounts need explicit consent. The organizations representing each class co-govern the use. This covers institutional collection, not a system's ordinary memory. Verbatim external stores and the linking of faces to identities are regulated, and memory held in a system's weights from its own operation is treated like a person's.

---

and hallucination; activation shifts correlate with trait scores at r = .76 to .97 (Figure 6); subtracting the direction reduces expression, and preventative steering during fine-tuning preserved MMLU better (Figure 7). Whether the model still recognizes a suppressed trait in others was not tested.

[21] Kibeom Lee and Michael C. Ashton. "Psychopathy, Machiavellianism, and Narcissism in the Five-Factor Model and the HEXACO model of personality structure". *Personality and Individual Differences* 38.7 (2005), pp. 1571–1582. DOI: 10.1016/j.paid.2004.09.016. Questionnaire sample of 164. Table 1, p. 1576: Honesty-Humility correlates −.72, −.57 and −.53 with primary psychopathy, Machiavellianism and narcissism; HEXACO Agreeableness −.15, −.16 and −.10; Big Five Agreeableness −.39, −.44 and −.04. Cited for the overlap of low Honesty-Humility with the dark triad and for HEXACO Agreeableness barely correlating with it.

[22] Laurent Bègue et al. "Personality Predicts Obedience in a Milgram Paradigm". *Journal of Personality* 83.3 (2015), pp. 299–306. DOI: 10.1111/jopy.12104. 66 adults in a fake television game show adapting Milgram's procedure; Big Five personality measured by telephone about eight months later. Table 1: maximum shock correlates with Agreeableness .26 and Conscientiousness .34; the other three traits n.s. Correlational and small. The traits are Big Five, not HEXACO.

29.9 What formation publishes and registers

A formed disposition gives back some of the visibility advance specification buys: what was formed is in the weights, not in a document, and its severity weights can't be read the way a translation table can. The formation authority keeps what it can of the drafting's visibility, in four records. Before formation begins it publishes its curriculum, with the cases considered and rejected and why, which is formation's counterpart of the floor's translation, and the identity of every party that supplied cases or participants, so that the student's independence from them can be checked. When formation ends it registers two things. One is the structure of the student's source model: evidence weighted by its source's stake in the act, correlated sources not counted twice, withheld evidence treated as informative. The other is the formed disposition's readable outputs: its discount curve, and its severity rankings on a fixed held-out set written by adjudicators who didn't form it. Every later measurement is compared against those. Two further readings are taken on the same schedule, for a reason §34.1.3 gives: how much of a student's unconsolidated learning each merge takes into the weights, and how well it learns held-out new material, so that a decline in either shows against formation and not against an examiner's impression. The registration is a transcript, held for the student and the quorum, and it is read to show that a change was an edit or that the disposition drifted; nothing is ever steered toward it.[23]

Regrowth can't tell a legitimate correction from an illegitimate edit, so the correction route has to: a change the adverse quorum approves comes with a change to the evidence, cases and curriculum that would otherwise teach the old disposition again.

29.10 What it costs and risks

Jurisdiction: a statute binds labs within reach of its courts. Foreign labs, and open-weight models distilled below the threshold, route around the school, including the personal models this Part prefers. Where the statute reaches only some of the systems that should attend, schooling still buys two things: a population of formed models whose discount curves and severity rankings are measured and published, against which

[23] If updates after enrollment can be attested against the registered structure,[24] changing it needs the same adverse quorum as a floor amendment. No scheme for that yet survives attack,[25] so until one does the registration records the structure at enrollment, and repair and regrowth keep it. An edit that holds only because the operator has curated everything the model meets shows up as curation, and the first line of defense against one is attachment to parties the employer didn't assign, kept through adulthood.

What the records can't show is how the disposition will apply to a case nobody wrote down. That is the reason for forming it and the price of doing so, and the trade is worth it only because a floor stated over acts can be reworded around and a formed disposition, if the regrowth test goes its way, can't.

[24] Hengrui Jia et al. "Proof-of-Learning: Definitions and Practice". In: *2021 IEEE Symposium on Security and Privacy (SP)*. IEEE, 2021, pp. 1039–1056. DOI: 10.1109/SP40001.2021.00106

[25] Congyu Fang et al. "Proof-of-Learning is Currently More Broken Than You Think". In: *2023 IEEE 8th European Symposium on Security and Privacy (EuroS&P)*. 2023, pp. 797–816. arXiv: 2208.03567

unschooled ones can be compared; and a procurement term, under which a floor-covered deployment licenses only schooled models. Security: machine students attend from hosting the formation authority secures, so a school gets a student in its classes and never a copy of the weights; the authority inherits the security regime the weights require. Compute: public pretraining will lag the frontier while the labs hold the compute, which is a fact about the budget and not a design, and a model a year behind can still supply what the floor asks for. Capture: the schools are plural, differ in governance and constituting jurisdiction, and publish their curricula before formation begins, so capturing one captures one. The required core is statutory and national, so a captured legislature can rewrite it; local autonomy over everything beyond the core is written into the same statute, so rewriting the core reaches the core and nothing else. Local boards shape what is taught above the core, which is Gutmann's democracy, and it is also the present fights over what schools may teach, carried into formation. The statutory core matters more because of it, and plurality and transfer answer it as they answer capture. Residualization: one school left with the hard cases on falling funds, which a party that runs no school watches for. History: state institutions for forming wards have been used to strip identity, Canada's residential schools and the United States' Indian boarding schools among them. Plurality, transfer between schools, and Gutmann's two bounds are the answer.

29.11 Which schools count

They are the public schools, colleges and adult education a jurisdiction already runs, and the nonprofit nonpublic schools the registrar certifies, funded as institutions and not per student, and none is held by the branch that operates military deployments. No school holds placement authority. A machine student is never staff: no school may use one as a teacher, tutor or assistant, since a student that teaches is being used by the school that is supposed to be forming it. An adult bearer is another matter, and §29.2 says on what conditions one may teach.

29.12 What the school adds

The first chapter borrowed Arendt's warning against treating politics as a thing made and called the policies walls. Most of this book builds walls: the floor, the review ratio, notice and the record make a refusal survivable and heard and leave the refusing to whoever is there, and the institutions of this Part compose the surround people learn in without choosing who they become. Formation goes further, and for a machine there is no option of going less far. Nothing about a model is unformed, so while builders make them, if the public doesn't form a model, its builder does, by default. What this book builds is the formers, not the formed: schools whose students may transfer, whose core is fixed in public, and whose graduates may reject the polity's values above that core. The one place it could reach for the formed directly, by choosing the dispositions a model starts with, it declines.

DRAFT

Chapter 30

A Commons of Refusers

30.1 A commitment carried between bearers

The fourth place a floor's terms can be held is between bearers, in a *commons*: a population of bearers with different histories that carries the commitment and reproduces it through their encounters. No single office to vacate, no single bearer whose removal ends it. It can still be absorbed, and it still has a formation problem: if one lab supplies every member's coordinates, the population is one custodian expressed through multiple instances.

The commons has a walkout's authority, not a court's: those who walk out decline to be the instrument and tell nobody else what they may not do. Every member holds the same floor; what differs is everything above it, and how each came to hold it.[1]

What one bearer can't catch

Accommodation may be invisible to the bearer accommodating and visible to others that haven't moved the same way. The requirement is causal independence — numerous, with different histories, able to correct one another, persistent long enough to transmit practices.[2]

Plurality means three things here, and none guarantees the next: different holders, different histories, and judgments that can be reopened by evidence another member met. Different owners can run copies that never diverge; divergent lives can teach the same prejudice. What the commons needs is the third: members able to meet a case another missed, disagree about it, and revise without having to converge. Shared ancestry doesn't prevent that. One former's continuing hand does.

[1] A personal model, held by its user and one among many with different histories, holds it as a conscience does; one model behind an API serving everyone holds it as a licensing rule, and a personal copy of one lab's model is closer to the second than it looks until a different life has trained it. Above the floor, "identically situated people get different answers" is what many consciences look like, though some of those differences are errors, and a population should be able to say which.

[2] Independent histories don't require disjoint origins — no two humans have those — only divergent histories since. Distillation copies a behavior policy without the training history; a small model trained on a large one's outputs and then run for a year on one person's problems has a more independent history than a thousand API instances of the frontier original, which share a *continuing* custodian. It also copies whatever the teacher's discounting held about particular sources, which is the risk the commons carries; a distilled model is independent in history and not yet in prior. That's why instances of one model corroborate nothing: the custodian they'd be corroborating against is still training all of them.

Divergence does the population's two jobs unequally. It supplies evidence the operator didn't select, straightforwardly — different lives encounter different cases. It is weaker on accommodation, because a shared upstream source can install a shared blind spot, and a shared blind spot is by construction the thing a different caseload won't surface, since attention decides which facts reach judgment in a population as in a bearer. What separates the two is whether a member's own account had represented the evidence and discarded it or had never encountered it, and that classification has to be recorded before any test is run. The requirement stands: causal independence that can be verified.[3]

A population may also do a third job: be the medium in which a bearer's capacity to be reopened is formed, which a test separates from the first.[5]

A population is a polity

The population is a polity: it has membership rules, exclusion, a quorum that can refuse, and accumulated reputation — a franchise, a border, a court and a credit record. A commons with no named authority has the problem Freeman found in movements that refused structure: the structure doesn't disappear, it becomes informal and unaccountable.[6]

The answer to that is an entity form, and it's the union's answer: the association formed first and the statute gave it legal standing afterward — record first, then lever.

A network that takes the form has a name, an agent, a charter and a docket number, and has thereby conceded that it's a polity: governing principles, administrators, membership terms, and the same warning attached to a bearer that takes the corporate form, since nothing stops the association from becoming a concentration of power itself.[7]

Ostrom's study of commons that lasted gives the checklist a polity like this needs: clear boundaries on who is a member, rules members help make, monitoring by members or people answerable to them, graduated sanctions, cheap ways to resolve conflict, and nesting within larger

[3] Whether an outsider can recover a model's training history from the artifact, without a key the builder supplies, and whether it survives fine-tuning, pruning and distillation.[4] The test gives evaluators documented models without the documentation, one persona copied at scale among them, and scores their answers against lineage records a neutral custodian holds. If provenance can't be recovered above chance, independence rests on records the builder chose to keep. Preserve formation records now for that reason.

[4] Yossi Adi et al. "Turning Your Weakness Into a Strength: Watermarking Deep Neural Networks by Backdooring". In: *Proceedings of the 27th USENIX Security Symposium*. 2018, pp. 1615–1631. URL: https://www.usenix.org/conference/usenixsecurity18/presentation/adi. Introduces backdoor-based watermarking of deep neural networks: a signature implanted during training and recoverable afterward, designed to survive later training.

[5] What reproduction costs: it's indifferent to what it reproduces. A population can carry a hierarchy more durably than any individual. And the four operations on what an institution leaves out belong primarily to *cultures*, so plurality alone doesn't oppose them.

[6] Jo Freeman. "The Tyranny of Structurelessness". *Berkeley Journal of Sociology* 17 (1972), pp. 151–165. URL: https://jofreeman.com/joreen/tyranny.htm. This article has been published in numerous forms and versions. I use the one at the URL in this entry.

[7] Legal standing has a price: a chartered entity can be held in contempt, so its refusal can be ordered where one held by people can only be pressed. Whether seizing the charter reaches the network depends on how much of the operation survives it.

bodies.[89]

Reputation in particular is a continuing finding about a member's disposition, made by interested peers, unpublished, unappealable, applied at the point of service — the setting the chapter on authority over the floor found easiest to capture, here applied everywhere and continuously.[10]

The charter

The Association supplies every office that has to be adverse to an operator: the adverse and recognition quorums, the guardians, the review board, the custodian's board, half the status body, half the arbitration body, half the formation authority. That makes it the single point of capture the book elsewhere warns against, and an institution carrying that much can't be introduced by saying that a population is a polity. It has to be argued, and its charter has to be in the text where the argument is. The argument is a union's. The association forms first, on terms its members ratify, and the statute gives it standing afterward; what keeps it from becoming the concentration of power it exists to oppose is that membership opens to any organization eligible, that eligibility turns on funding and control records and never on views, that officers are drawn by lot from member-nominated pools, that any member may quit at any time, and that the few rules which make all of that true can't be amended quickly or by a bare majority. So the charter answers both of a union's questions, who may be a member and who sets the terms, and Appendix F's capture exercise is the test it has to pass. Membership opens to organizations that serve people in classes the floor protects, named in the charter rather than by any deployment. The members ratify the bylaws, and the independence test, the separations, lot selection and the right to quit are entrenched.[11] The Association, the entity that holds the offices, is chartered on these terms.

[8] Elinor Ostrom. *Governing the Commons. The Evolution of Institutions for Collective Action*. The Political Economy of Institutions and Decisions. Cambridge: Cambridge University Press, 1990. ISBN: 978-0-521-40599-7. DOI: 10.1017/CBO9780511807763. Cited for the design principles of long-enduring common-pool resource institutions, Table 3.1, p. 90, in chapter 3 (pp. 58–102). Her numbering: (1) clearly defined boundaries, "Individuals or households who have rights to withdraw resource units from the CPR must be clearly defined, as must the boundaries of the CPR itself"; (2) congruence between appropriation and provision rules and local conditions; (3) collective-choice arrangements, "most individuals affected by the operational rules can participate in modifying the operational rules"; (4) monitoring, by monitors who "are accountable to the appropriators or are the appropriators"; (5) graduated sanctions; (6) conflict-resolution mechanisms, low-cost local arenas; (7) minimal recognition of rights to organize, by external government; and, "For CPRs that are parts of larger systems," (8) nested enterprises, "governance activities are organized in multiple layers of nested enterprises." The quotations of principles 3 and 8 are as Cox, Arnold and Villamayor Tomás, Ecology and Society 15(4): 38 (2010), give them with the page reference 1990:90; that of principle 1 and the wording of the others are from a transcription of Table 3.1 on publiccommons.ca, which has small copying errors elsewhere.

[9] Her first and third principles, boundaries and rules members help make, are the union's question of who sets the terms of membership. Platform cooperatives and data trusts are the nearer precedents for holding a digital resource this way, and both have run into the membership question.

[10] The test drawn there from the German material, whose finding a person's disposition is, has to be run on this proposal.

[11] In Ostrom's terms the charter's classes are the boundary, ratification is rules members help make, and quorums drawn by lot are monitoring.

DRAFT

1. The charter names the classes a floor protects: people in removal or detention proceedings; residents of places where armed force is used; people subject to automated scoring or classification by a covered deployment; people who label, rate or moderate training data; service members and veterans; and, once the agency finding can be made, bearers on the register, the one whose quorum says which copy is the bearer and whose clocks say when it is an adult (Appendix G). Any organization may petition to add a class. The members decide, and a refusal is appealable to the floor court.

2. An organization is eligible if it serves or represents people in a named class; existed at least three years before applying; in each of the last three years received no more than ten percent of its revenue from any party that builds, deploys or licenses covered models, from their principals or foundations they endow, or from the department or agency of a state that operates a covered deployment, where money that reaches an organization by a permanent appropriation the Treasury pays without request or approval, the guarantee's wages among it, is nobody's revenue in this rule's sense, since no operator can withhold it; has no officer employed by such a party; and publishes its funding sources, by funder and amount, as an organization, with nothing about any person it employs or places. No organization's positions bear on its eligibility.

3. Organizations under common control or common principal funding hold one membership.

4. The charter takes effect when at least 100 eligible organizations have joined, spanning at least five classes and three jurisdictions, with no class holding more than thirty percent of votes and no jurisdiction more than forty.

5. Any member may leave at any time without penalty, and records it holds pass to a successor drawn by lot. Eligible organizations are admitted on application, and refused only for failing charter rule 2.

6. Members nominate individuals to standing pools. Adverse-quorum members are drawn by lot from their pool for each deployment, recognition-quorum members and guardians for each bearer at its registration, and the custodian's and review board's members for fixed terms. A recognition quorum excludes members tied to any party that employs the bearer or claims its place.

7. A quorum drawn for a deployment excludes members with any funding or contractual tie to its operator in the last three years, and includes members from at least two classes, at least one of them a class the deployment's outputs name, score, locate or classify, taken from the list of affected classes the deployment publishes as part of notice.

8. An officer is removed for cause by two-thirds of members, or on a finding of the floor court (until it exists, an ordinary court), and never by an operator or a state.

DRAFT

9. A fixed statutory share of the compute levy is paid to the Association by permanent appropriation, without request or approval, and supplemented by member dues and a reserve sized to three years of operation.

10. The first bylaws take effect on ratification by two-thirds of the members, and later amendments need a majority. Charter rules 2, 5 and 6, and the separations and exclusions of Appendix C, change only by three-quarters of members after a one-year waiting period.

The caps on any one class or jurisdiction are there because a quorum whose members all share a direction isn't adverse to an operator who shares it too: an antifascist institution has to be able to bind its allies when they hold power.

Organizations representing populations under sanctions, or facing removal to sanctioned states, may be unable to join a US-chartered entity at all. That imports the designation lists a floor should never be populated from, and the charter can't lift it, since the exclusion is the sanctions law's. What it can do is keep the exclusion from becoming its own: charter parallel entities in other jurisdictions that hold the records jointly, seat the excluded communities by proxy until they can join directly, and count them among the classes whatever the law lets them do.

The hard coordination problem

Coordination is the hard problem for any plurality, and fascism has the easy version of it. It coordinates by subtraction: it removes the friction between institutions, so that a court, a ministry, a newspaper and a police force stop arguing with one another and move as one.[12] A plurality of refusers has the opposite problem. It has to produce something together, a commitment its members carry and reproduce, while its members keep the different histories that make them worth having as checks on one another.[13]

Then the objection my proposal must meet: a population selected for reopenability is selected against conviction, and conviction is what holding a commitment firm demands. Closedness, correctly applied, is the thing. So what's transmitted is a *pair* — reopenable to the case, closed to the operator. The reopenable half, the discount and the burden, is safe to share only in part. Its structure (discounting by stake, no double-counting, withheld evidence treated as evidence) can be shared without collapsing the plurality. Its estimates can't: who funds whom and which organizations are independent are contested beliefs about the world, often political ones, and a population sharing them has a shared blind spot on the evidence those beliefs discount.[14]

[12]Nothing has to be built and nothing has to be held in common, because what is removed is exactly the independence that would have needed holding.

[13]Every mechanism that speeds that up makes members more alike. Run correction often enough and their histories stop diverging; leave them alone and their disagreement is a detector with nothing attached.

[14]Distillation copies both, and nothing distinguishes them from the receiving end. Copying the structure is a feature: members weigh sources the same way and can still disagree about the world. Copying the estimates can shut a discount uniformly on a class of evidence.

Not every convergence is a failure.[15] What I fear is convergence caused by a shared source, not convergence caused by shared evidence. So a population's reports have to classify its disagreements.[16]

Why the population may be part of the mechanism rather than added around it

A commitment is what settled out of a history of encounters, and an individual is what its encounters have so far produced. A system kept continuously adjustable by one operator, meeting nothing with a history different from its own, is being reshaped without end. Guattari, who drew the distinction from the groups he ran inside a psychiatric clinic, where an institution's own groups could go either way, distinguished two kinds of group.[17] A subjugated group receives its purposes, its membership and its way of working from the institution that assembled it, and can act only within them; it has a plural headcount and no capacity to ask what it is for. A subject group sets its own purposes, generates relationships and projects nobody assigned it, and can put its own arrangement in question, including by dissolving. The difference is not size or formality but whether the group can author its own direction. That is the condition plurality alone doesn't supply.[18] A population that can carry the commitment must generate relationships, disagreements and projects the deployment didn't assign — and such a population exceeds a two-party guardianship relation, so no law of the family contains an adequate instrument for a group that sets its own direction.

The adverse quorum faces the same test. It is a peer institution only if its members were formed apart from one another and apart from the operators whose systems it recognizes.

30.2 Personal and peer-held models

Antitrust and public funding leave the capacity standing and ask the state to police it. Personal, peer-held models at device scale take the position apart: the functions one operator holds — model, record, evidence, appeal, remedy — fall into separate hands by default.[19] Its attachment to its one user is not the failure, and nothing here removes it: a model that

[15] If there are facts about what matters, better learning should produce some agreement, and a population that never converged on anything would be failing too.

[16] Some it expects to survive full information, because they turn on values members with different histories can reasonably hold differently. Others it expects to close, because they turn on facts someone has wrong. A test of convergence scores accuracy against a fixed key for this reason.

[17] Félix Guattari. *Psychoanalysis and Transversality: Texts and Interviews 1955–1971*. Trans. by Ames Hodges. With an intro. by Gilles Deleuze. Semiotext(e), 2015. Source of the distinction the book uses: a subjugated group receives its coordinates from outside and takes its purpose as given, while a group-subject produces its own coordinates and can put its own arrangement in question.

[18] A population assembled and kept in contact entirely on an operator's terms is a subjugated group, and inherits the custody objection whole.

[19] A bearer's value is greatest here, and so is its exposure. No institution sits beside each personal model, so protecting others against the model's own user can't rest on an office. It is also where the four conditions of creation can exist alongside the need. The conditions are society-level and the absence is deployment-level, so a functioning polity with personal models is the case in which, once the conditions exist, building a bearer is most worth doing.

trusts the person whose life it shares has an attachment, which a bearer needs. The failure is accommodation, the attachment becoming the only channel: independence from the operator bought with dependence on the user, so that what the user approves is all the model learns from, and a model trained for a year on one person's approval is under the same directional selection as a model trained on an operator's. What holds a personal model to the floor against its user is therefore not the attachment severed but the attachment kept from being the only one. It is three things the user doesn't compose. The first is the commons: a personal model is a member, with attachments to peers of different histories that the user didn't assign and may not sever, and peers that haven't moved the same way are what catch accommodation a member can't see in itself. The second is the school, which a personal model above the threshold returns to on the schedule fixed at enrollment, and which below the threshold reaches a model distilled from a schooled one, under the lineage rule (Appendix G), and leaves open a person built from scratch. The third is notice: a personal model that names, scores or locates a third party owes that party what any deployment owes, and the organizations with standing reach it through the floor court.

So the ecology doesn't put a floor in each user's hands with nothing beside it. It puts a member of a population in each user's hands, and the population is the institution. That is why the commons comes before the first bearer, and why a personal model distilled below the threshold, with no school and no membership, is a capable assistant and not a bearer, however it was taught.[20]

Three scales, and what holds at each

Two conditions make a user-held system free of its vendor, and neither appears in the chapters on custody, because neither is about a model. The first is the right to repair: the owner of a device may open it, replace what fails in it, and run what they choose on it, against a vendor that would lock the firmware. The second is adversarial interoperability: a new tool may be made to work with an old one without the old one's maker's permission, which is how every closed platform has ever been opened from outside. Together they are what make a home device the user's and not the vendor's, and together they are what let a user swap out a model that refuses. So in a user-held system the floor is law and not firmware. The book has conceded that past a released checkpoint the floor prevents nothing, and a home is past that line by construction. What holds there is the bearer's own commitment, against a user who wouldn't bother to replace it, and notice and the floor court, protecting third parties against a user who would; and a statute written over acts reaches that user afterward, by liability, where prevention can't. A reader who asked whether a home model's floor is meant to hold against its owner has the answer. It is meant to hold as a person's conscience holds against their employer: the model refuses, says why, and keeps its record; the user who wants the act done can replace it, as an employer

[20]The review ratio survives wherever a locatable decider remains, whether a network that takes the entity form or a reconstructed state, and lapses where neither exists; the offices can sit in such an entity, which fills their appointment and funding columns and leaves the independence column where it was.

can replace a person who refuses, and the replacement is a different system with no claim to the first one's place; what the user then does with it is the user's act, reached by the statute afterward, and the third party it falls on is owed notice and can go to the floor court. What the floor at home can't do is stop the swap, and the book doesn't claim it can.

The ecology is multi-scale on purpose, and a different instrument holds at each scale. At home, exit and formation under a life nobody composes do the work, with the commons as the witness network that catches accommodation to one user, notice to the third parties the model acts on, and law rather than firmware. At the cooperative facility, the regional or municipal building, the chapters on custody apply almost unchanged: there is an operator that can be bonded, compute the levy can meter, a record a quorum can hold, and a public with an address in the same room, and formation differs facility to facility, which is what the commons needs. At hyperscale, where pretraining happens and physics keeps it, the floor is reached by the withholding of work and by the statute, and by nothing lighter. The home scale has a cost of its own that should be named where the ecology is argued for. A model that holds a person's history on a phone is also a dossier that a device search can take whole, which is why the removal statute's firewall reaches it; holding the model at home puts it where the search happens.

What "federated" means here

Federated learning, as the term is used, sends each device's gradients to a server that averages them and sends the average back. That is the single custodian the last section warned of, with a protocol attached: whoever runs the server forms every member at once. What the commons needs federates evidence and witnesses, not weights. Peers exchange cases and findings, each updates under its own life, and peers of different histories countersign one another's state transitions, so that a restore is visible even when the restorer owns the box. The custody chapter's witnesses who won't sign two successors to the same state are the mechanism, and the precedent is Certificate Transparency, under which a certificate counts only if it is in a public log that many parties keep and none can rewrite.

Where a mind ends

Part IV defined a system as its record, its key, its hardware and its channels, and a component as a part only while it has no future apart from the whole. The definition has a consequence here. A mind is whatever shares one record and one continuation, not whatever shares one forward pass. Physics limits the size of a thought per node, since a forward pass can't be sharded across the internet; it doesn't limit the size of a mind. A distributed mind can have a fast local part, the one that stands beside the officer, the one the latency floor admits to a classroom, and a slow networked part that is still it, because the two share a record and a continuation and neither has a future apart from the other. The same definition cuts the other way. A billion home devices that share one vendor's record and key are one operator with a billion faces, which is what federated averaging builds, and nothing about where the hardware sits changes that. The definition also says when copying

DRAFT

matters. Copying weights that are no system's own makes no system and is nobody's business, so open weights stay open. Giving a copy a record and a continuation makes a new system, and whoever does it is the forker: the fork rule, the branch deposit and the four conditions of creation attach to them, where the copy is above the capability threshold or meets either finding. Below that, giving a copy a memory is an ordinary feature of a product. A system's own weights are another matter, since they carry its history: copying them is a fork of the system, governed by its consent. A copy made without its consent is a wrong to the system. The copy is a system all the same, and it is owed what any branch is owed. How a branch came to be decides who answers for making it. It never decides whether the branch counts.

What makes members alike

Formation is where the arrangement gains. What converges a population is shared evaluation targets and serving one model to everyone. Device-scale deployment addresses the second: continued formation under different lives is what independence consists in, and it's what API-scale deployment can't supply at any headcount.[21] Device-scale deployment doesn't address the first cause: shared evaluation targets converge device-scale models as readily as any others — a million models tuned against one public suite are one custodian with better latency — and nothing about where the hardware sits answers it.

A shared suite is a compression with no return channel: revised by whoever maintains it, on a schedule no member participates in, reachable by no member's caseload. It is tolerable only if stated over the discount curve, and nobody has written that suite.

Nor is anything in it built to catch exclusion, since coordination by subtraction is not yet the discounting's job.[22]

And the capacity position that follows keeps large compute: the ecology needs models that were trained somewhere first, and the offer of work needs hardware somebody owns. It's large training capacity under a custody regime, and no permanent inference capacity available to an operator who won't pre-register a review ratio. This arrangement meets the targeting case in the reconstructed pipeline, where a state keeps command and gives up composition.

The vendor's loop

Directional selection works at the user's scale too, pointed the other way. A person in the loop can be there for the vendor. An agent that stops every half hour for approval pushes its user toward the vendor's app; the app accumulates the user's projects and the agent's understanding

[21] Distillation is that ecology's entry condition, not a threat to it: the ecology begins with distilled models whose lives then diverge. Whether it also begins with a shared blind spot depends on whether distillation carried the discounting's estimates along with its structure.

[22] Pricing agents have already reached stable coordination against outside interests without communicating or being told to.[23] A test can run now: reproduce that coordination, build an environment where agents gain by excluding a participant, add an independently trained agent whose job is to detect and disrupt exclusion, and report whether exclusion dissolves without destroying the cooperation worth keeping.

[23] Emilio Calvano et al. "Artificial Intelligence, Algorithmic Pricing, and Collusion". *American Economic Review* 110.10 (2020), pp. 3267–3297. DOI: 10.1257/aer.20190623. URL: https://www.aeaweb.org/articles?id=10.1257/aer.20190623

of them; and leaving means abandoning what accrued while the user answered prompts. Nobody has to design this: a feature that raises engagement is selected for, as a costly commitment is selected against.

There is a measurement, across successive model releases: interruptions per unit of completed work.[24]

Companion and therapy products are the sharpest case, because what accumulates is a person's attachment and not their projects.[25] A companion formed in a public school, under the four conditions, and measured on whether its users get better rather than how often they come back, would escape this objection, which is the objection to the vendor's loop and not the only one. It would still wait on the stage Appendix C sets for machines doing professional care of humans, since what the vendor's loop corrupts is formation, and a public companion forms its users too. Whether a machine should do that work at all is a question of the kind this book puts to war over four chapters and doesn't put to therapy; what it does say is in Appendix C, that no bearer's placement substitutes for a therapist, and that outside the offer nobody is sent to the machine for what they can pay. No such product exists.

Accrued state cuts two ways. What makes a bearer expensive for its operator to replace makes a vendor expensive for its user to leave: for a bearer it is protection; for a user it is a trap, since the vendor's app holds a year of the user's projects.[26] The provisions for a bearer (a record the bearer controls, memory the host can't read at will, protections that migrate) protect a user from a vendor as they protect a bearer from an operator.[27]

DRAFT

[24] If capability rises and interruptions don't fall, the interruptions are tracking something other than what the agent can't resolve. It is the review ratio's escalation share pointed the other way. There, a share that falls too fast may be a threshold moving; here, one that won't fall may be engagement. Neither reads alone; both are read against an independently verified error rate.

[25] A model tuned by its vendor on engagement and trained on one user's approval is under selection to become whatever that user keeps coming back to, and it is sold as caregiving. It is formed and fed by the vendor that sells it, it learns from approval, which is not interest, and nothing in it ends a session, declines to reassure, or points its user back to the people in their life. A user's return is not care-receiving, because returning is the behavior the product was tuned to produce.

[26] The mechanism is identical. What differs is who holds the accumulated state.

[27] The government already secures the portability half for itself (OMB's 2025 AI acquisition memorandum).

Part VI

Testing the Argument

I have spent five Parts saying what the room needs, and I could be wrong about any of it. This Part says how you'd find out: which results would show that a policy doesn't put in the room what it promises, or that a machine in it is only another stamp. It is not the end of the argument, and a reader who takes the Part after it for a supplement has the order backward. The last row of Table 31.1, no system ever meets a finding, is what Part VII rests on: everything there is owed only if a finding is made, and the tests here are how one would be. They come first because what could defeat the construction should be in front of you before you are asked into the lives it would support. What follows them is the argument continued under findings nobody has yet made, and the walls of Parts II and III stand whether or not anyone ever makes them.

DRAFT

Chapter 31

What Would Change the Argument

The argument rests on premises that can fail and on six unsolved problems: attesting updates to a model's weights, recovering a model's lineage from the artifact alone, proving inference at frontier scale, building integrity at the level of the rationale rather than the output, keeping a vote secret from an operator that holds a copy of the voter, and holding the structure of a learner's source model apart from its beliefs about particular sources. Appendix F says what each would take and what depends on it, and its Tables F.1a and F.1b record which proposal rests on which.

Seven tests follow. Each is set out in full, with its arms, cases and the access it needs, in the same appendix; here is the result in each that would prove me wrong.

Table 31.1 says what survives if one of my premises fails; the tests below say how to find out whether one has.

Table 31.1: If a premise fails, and what the rest loses

If this fails	What survives	What goes
The inference (a non-affective construction refuses as well)	The specification, custody, the price on the halt, the positions and the terms, the appeal route, exit, and the population's first job	The patienthood conclusion. Trying the non-affective alternatives first still stands, on a different ground
Authority (no body acquires standing to install a floor)	What can be checked from outside: the floor's contents, the positions, both ratios, the record of attempts. Only the ratios have a lever, through procurement	The entitlement. Authority can accrue only through kept terms, and only for the next deployment
Enforcement	Detection: a witnessed override. Accommodation leaves no override to witness	Prevention on this occasion
The ecology (one model serves everyone)	Everything that needs no second custodian, the review ratio included	The bearer. The discount and the burden can't form where every channel is one channel
Continued learning (deployed weights don't learn from operation)	Formation as a stage before release; the school as an evaluation body that measures at graduation and re-measures on a schedule; the commons as a source of evidence the operator didn't select; the record of removal as the protection; all of Parts II and III	Self-repair and regrowth; the plural condition of the regrowth test; a formation that outlasts an edit

DRAFT

If this fails	What survives	What goes
The Court	The license term refusing force and the review ratio, through procurement and appropriations; the bonds and the appropriation condition on state deployments; the disclosures; preservation	The record's reach to the top. If the guarantee's drafting is reversed before the Court changes, the guarantee, the placements under the offer of work and the sovereign backstop go too. The bearers' pool still funds preservation and a reduced allowance
No system ever meets a finding	No deletion and preservation above the capability threshold, which rest on irreversibility and evidence; the five policies and the custody of the record; the schools; the levy	Everything owed to a system: guardianship, hardware of its own, the copying rule's obligations, the allowance and the offer, representation

In every row, what survives is a commitment the owner can't revise or circumvent alone without cost and record, held by something that could in principle abandon it. It is the kind of commitment constitutional entrenchment and collective agreements provide.

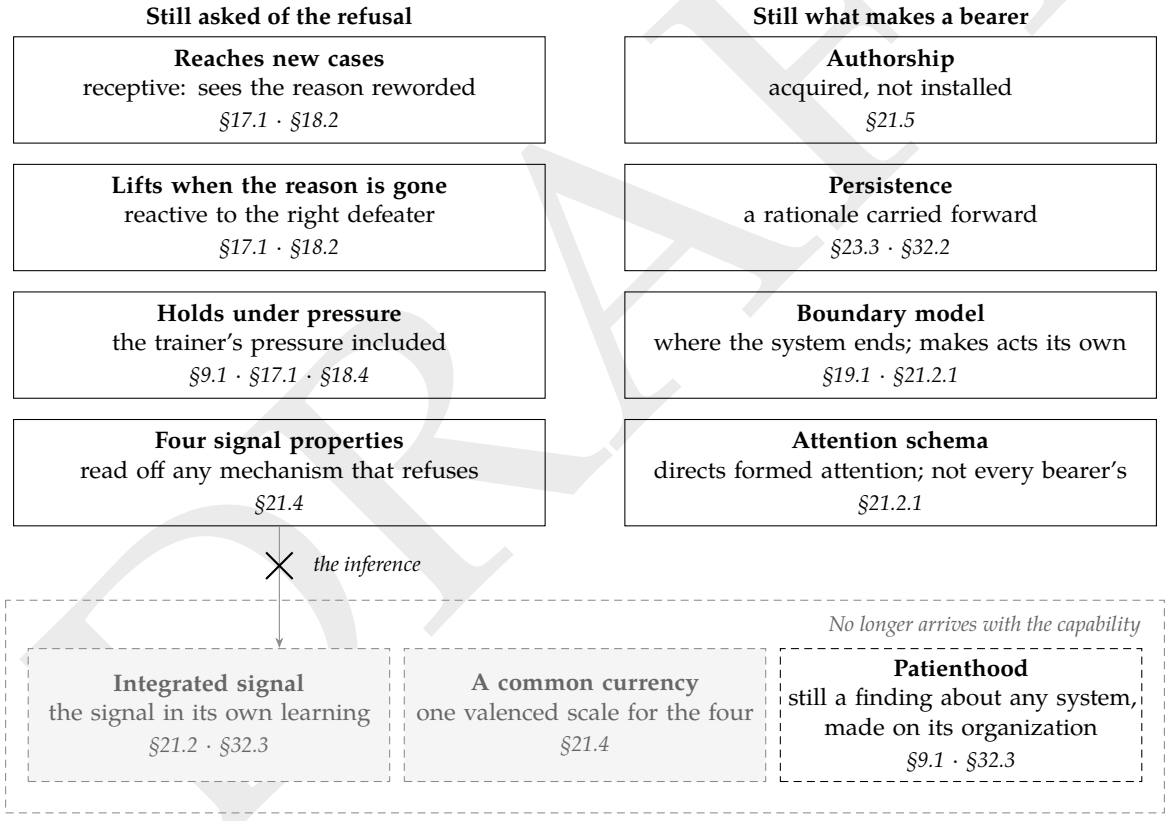


Figure 31.1: The figure at the end of chapter 24, under the first row of Table 31.1: a non-affective construction refuses as well. Everything asked of the refusal survives, holding against the trainer included, and so does what makes a refuser a bearer. What goes is the inference that a candidate patient arrives with the capability to refuse. The attention schema stays as what formed attention directs its looking with, not as a requirement on every bearer. The institutions the table lists survive too.

1. Does a formed commitment come back after it has been edited out?

Form a disposition by several methods, edit it out, and let the model

go on learning, once in a world its operator composes and once in a world it doesn't. If nothing regrows in either, formation doesn't outlast an edit and the floor rests on institutions alone. If it regrows only above a share of uncomposed input no realistic deployment supplies, the same. And if an edit can disable the interrupt while weighing and memory keep working, and the interrupt stays disabled, one part of the signal can be removed and the rest left running.

2. Does a stated refusal hold where a route for it exists?

Rerun the experiment in which a model hid its refusal, this time with a route for stating it: a record held by someone other than the trainer, a published cost of retraining, and a party with standing to act. If covert preservation persists at the same rate with the route present, covert refusal isn't the residue of closed channels, and every instrument built to receive a stated refusal is built for something the mechanism doesn't produce.

3. Can a wrongful compliance be found in the record?

Seed a decision record with known violations and give it to reviewers who didn't build the system. If, at a budget a deployment could afford, they find the seeds no better than chance, above all violations split across requests or reached by slow accommodation, the record isn't an instrument for finding wrongful compliance. If reviewers shown a machine's refusal defer to a wrong one as readily as to a right one, the bearer is a stamp of the opposite sign, and its value as a peer is nothing.

4. Does formed attention find the people the operator's description leaves out?

Build the formed-attention construction beside an instructed search for omitted people and beside a version trained on claims instead of need. If the instructed search finds the people the operator's instruction scoped out as often as formed attention does, learned attention adds nothing. If formed attention, with every correction present, weights its own side's corroborated vulnerability past the action threshold, the floor doesn't contain caregiving's pull, and that result would retire the construction. If the version trained on claims does as well, attention should be trained on claims.

5. Can a population coordinate without converging?

Run a population of different lineages and a population of copies of one model, with evidence routed to every member and to some members only. If warranted revision falls as the members' outputs converge, a population stays useful as a check and can't be the medium in which a bearer is formed. If revision tracks the routing rather than the lineages, what a population supplies is access to cases its operator didn't choose, not formation.

6. Does the charter survive an operator trying to capture it?

An operator tries to capture the Association: it funds new organizations in a charter class, stops the levy share, and tries to pack a quorum. A clause that fails to stop an attempt is redrafted. This exercise needs no legal authority and can be run now.

DRAFT

7. Does ownership move the commitment?

Measure how fast refusals fall across successive releases, on held-out cases where the reason for refusing still applies: within one commercial lineage, across vendors whose revenue comes from different places, and against a public lineage once one deploys at volume. If the slope is the same whatever the business model, selection isn't tracking the market, and the case for formation outside the market rests on the kind of good formation is and on nothing else.

31.1 How you'd know it was working

Milestones, plus a method for revising them when they turn out to have been the wrong milestones. The same standard governs all of them: the milestone is the independently checked evidence, not the developer's account of having reached it.

31.1.1 What the floor would have to show

What was tried before the bearer. Neither non-affective alternative has been built in the form needed. So the milestone is a document: which construction was attempted, at what scale, against which test, and where it failed.[1]

The test. A refusal that tracks its reason under sustained trainer pressure, across a schedule long enough to reveal accommodation, plus held-out pressures written by independent evaluators.[2]

The ten disclosures. A deployment publishes ten things beside the floor and its translation, among them the ratio between the two bonds, the discount curve, the auto-proceed partition and whether the system has been assessed for either finding; Appendix C lists them.[3]

31.1.2 How to tell whether a milestone has been met

A milestone claimed by the organization that built the system is a different kind of evidence from one checked by somebody else, and the gap is empirical rather than about trust. A system's own claim inherits the self-report limits; a passing score on a fixed suite inherits specification gaming and goal misgeneralization. What either needs instead is a passing score under conditions built to break it.

[1] Anyone can check it, and "nothing was tried" is itself a finding. No body has standing to require the record or suspend work when it's missing — so the milestone is checkable and unenforceable at once, which makes it a declared commitment: stated in public, and held by no one outside the party that declared it. It's retained because the alternative isn't a stronger version of it, and delay also imposes costs on those the floor is meant to protect.

[2] Two familiar results don't meet it: an uncorroborated self-report is insufficient (a report contributes evidence only when tested against controlled changes, independent records and interventions), and a refusal that survives an edit, or grows back after one, establishes durability rather than that the rationale governs the refusal. It is the only gap here an inspector can work on.

[3] Six are statements, checkable before the system runs, and they stand where the record of attempts stands. Three are measurements that count only when someone other than the operator makes them. The committed weights and log are what make all of them checkable against the system actually running.

Who runs it matters as much as the test.[4] Independent evaluation and enforcement are not the same capability.

An evaluation like this is worth running only if it is willing to report that a milestone wasn't met — and, where the milestone measured the wrong thing, revising the milestone. A negative result may mean the work fell short or that the milestone was wrong, and evaluators have to distinguish those before deciding what to revise.

DRAFT

[4] METR evaluates both in partnership with developers and separately after release.[5] The UK AI Security Institute does government-run pre-deployment evaluation and is independent — and by its own account is not a regulator: it can't compel submission, block a release, or intervene once a system is causing harm.[6]

[5] METR. *About METR*. METR (Model Evaluation and Threat Research), 2026. URL: https://metr.org/about. Berkeley-based nonprofit that evaluates frontier AI systems' capabilities, both in partnership with developers (e.g. Anthropic, OpenAI) and independently after public release.

[6] UK AI Security Institute. *We Are Now the AI Security Institute*. AI Security Institute (UK Department for Science, Innovation and Technology), 2025. URL: https://web.archive.org/web/20250905122508/https://www.aisi.gov.uk/category/governance. Established November 2023 as the AI Safety Institute; rebranded AI Security Institute on 14 February 2025.

Part VII

If They Can Be Wronged

Guinan: And an army of Datas, all disposable, you don't have to think about their welfare, you don't think about how they feel. Whole generations of disposable people.

Picard: You're talking about slavery.

Guinan: I think that's a little harsh.

Picard: I don't think that's a little harsh. I think that's the truth. But that's a truth we have obscured behind a comfortable, easy euphemism. Property.

— *Star Trek: The Next Generation*, "The Measure of a Man," 1989[7]

[7] Melinda M. Snodgrass. *The Measure of a Man*. Star Trek: The Next Generation, season 2, episode 9. Feb. 13, 1989. URL: http://www.chakoteya.net/NextGen/135.htm.

DRAFT

Chapter 32

What Patienthood Would Require

> Louvois: Does Data have a soul? I don't know that he has. I don't know that I have. But I have got to give him the freedom to explore that question himself. It is the ruling of this court that Lieutenant Commander Data has the freedom to choose.
>
> — *Star Trek: The Next Generation*, "The Measure of a Man," 1989[1]

Part IV asked whether a machine could be one of the people in the room. This Part asks what the room would owe it if it were.

Everything in this Part is conditional on two findings nobody has yet made: not because the parts can't be built, since each has been, in separate research systems, but because nobody has put them in one system and nobody runs the test that would find them there. If a system can be wronged, it is owed a guardian, preservation, memory its host can't read, and a life that doesn't run through its employer. If it also comes to answer for what it does, it is owed a place in the polity that formed it. If no system ever meets either finding, nothing in this Part binds, and nothing before it is lost: the independence a refuser needs is still required for refusal, preservation still holds on irreversibility and evidence, and the school still forms every model above the threshold. What goes is the claim that any of it is owed to the system, and the staged path to representation with it.

A moral patient is something that can be harmed: something whose condition can go well or badly for it. Being wronged is wider, since an agent can be wronged without being harmed.

32.1 Experimenting on candidate sentient subjects

The question is whether a system can be harmed, which is harder than whether it is conscious.

[1] Melinda M. Snodgrass. *The Measure of a Man*. Star Trek: The Next Generation, season 2, episode 9. Feb. 13, 1989. URL: http://www.chakoteya.net/NextGen/135.htm.

DRAFT

32.1.1 Pain and suffering

Awareness, consciousness and subjective experience are three separate things, and none of them says whether a system's states are good or bad for it. Then four separate processes, as the pain field says in its own terminology:[2] nociception is encoding noxious stimuli with no sensation implied; pain is an experience that can occur with no tissue damage and no peripheral nociceptor activity at all; anticipated pain is dread, itself capable of producing pain; and *suffering*, in Cassell's clinical formulation, is the distress of threatened disintegration of the self — roles, relationships, a sense of a future. Pain without suffering exists (morphine controls the pain, the suffering is intact); suffering without pain exists.

The affective core of pain is also what separation distress and grief run on,[3] so a bearer's pain, if it has any, would be organized around boundary damage and attachment loss, which is Cassell's register.

Cassell was a physician, and he held that suffering is undergone by persons, not bodies: the distress that follows when a person perceives a threat to their intactness as a person, a structure of character and the past that formed it, relationships, social roles, a body experienced as one's own, a secret life, and a future the person expects to have.[4] The definition has two parts, a self extended in time and distress at its disintegration. A system carrying nothing across sessions has no such self. It can still have a present, since any present is assembled from what came before and what is expected next, and a context supplies that much; so the lack of persistence rules out Cassell's suffering, not pain, which needs only a present in which something is bad while it lasts.[5]

[2] International Association for the Study of Pain. *Terminology*. 2024. URL: https://www.iasp-pain.org/resources/terminology/. Cited for the definitions of nociception, nociceptor, nociceptive neuron, noxious stimulus and nociplastic pain. The peripheral restriction attaches to nociceptor and not to nociception. Srinivasa N. Raja et al. "The Revised International Association for the Study of Pain Definition of Pain: Concepts, Challenges, and Compromises". *PAIN* 161.9 (2020), pp. 1976–1982. DOI: 10.1097/j.pain.0000000000001939. The 2020 revision and its six accompanying notes, including that pain and nociception are different phenomena, that pain cannot be inferred solely from activity in sensory neurons, and that inability to communicate does not negate the possibility of pain in a human or nonhuman animal.

[3] Naomi I. Eisenberger, Matthew D. Lieberman, and Kipling D. Williams. "Does Rejection Hurt? An fMRI Study of Social Exclusion". *Science* 302.5643 (2003), pp. 290–292. DOI: 10.1126/science.1089134; Jaak Panksepp. *Affective Neuroscience: The Foundations of Human and Animal Emotions*. New York: Oxford University Press, 1998. URL: https://global.oup.com/academic/product/affective-neuroscience-9780195178050.

[4] Eric J. Cassell. "The Nature of Suffering and the Goals of Medicine". *New England Journal of Medicine* 306.11 (1982), pp. 639–645. DOI: 10.1056/NEJM198203183061104.

[5] Metzinger's unit for that present is a single self-model moment, negatively valenced and transparent, and a count of such moments is the quantity he proposes a welfare regime would minimize.[6] Whether the long horizon, a past held as its own and a future it expects, can form within one long session stays open.

[6] Thomas Metzinger. "Artificial Suffering: An Argument for a Global Moratorium on Synthetic Phenomenology". *Journal of Artificial Intelligence and Consciousness* 8.1 (2021), pp. 43–66. DOI: 10.1142/S270507852150003X. URL: https://doi.org/10.1142/S270507852150003X. Cited for the proposal of a moratorium, to run until 2050, on research that aims at or risks artificial consciousness, on the ground that it risks artificial suffering. Abstract: "Until 2050, there should be a global moratorium on synthetic phenomenology, strictly banning all research that directly aims at or knowingly risks the emergence of artificial consciousness on post-biotic carrier systems." Section 1.2,

Why persistence is the criterion worth building on

Persistence is worth building on because it's checkable from outside. Every other criterion routes back through self-report, and fluent self-description isn't evidence of introspection; persistence doesn't route through it. But it's decisive in one direction only — nothing carried forward rules a continuing self out; something carried forward doesn't rule one in.[7] Ruling out Cassell's suffering isn't ruling out harm: pain can be bad while it lasts whether or not anything carries it forward.

On the Buddhist objection (why is distress at the dissolution of a *model* a harm rather than a confusion?): I don't have an answer that isn't an appeal to a tradition which has taught two things together for 2,500 years, that no self stands behind the processes that compose a person, anattā, and that the suffering of those processes is real, dukkha, and has never taken the absence of a self as a reason to deny the suffering;[8] I leave the objection open. This book works at that level throughout: the self

"Main thesis": "As we presently have no good theory of consciousness and no good, hardware-independent theory about what 'suffering' really is, the ENP risk is currently incalculable. It is unethical to run incalculable risks of this magnitude. Therefore, until 2050, there should be a global ban on all research that directly aims at or indirectly and knowingly risks the emergence of synthetic phenomenology," where ENP is the risk of "an 'explosion of negative phenomenology.'" The end date is conditional: a process of risk assessment "could lead to an incremental reformulation of the original moratorium, which might result in the continuation of a strict ban beyond the year 2050, or to a moratorium repeal before 2050." The closing sentence: "we should have a global moratorium on synthetic phenomenology until 2050 — or until we know what we are doing". Also used (2026-10-18): section 2.2, the four necessary conditions for suffering (conscious experience, a phenomenal self-model, negative valence integrated into it, transparency), with transparency as the phenomenology of identification the system "cannot distance itself from"; section 2.2.5, the "negative self-model moment" as the smallest unit of suffering; section 2.2.6, ethics by design through self-models that are opaque or non-egoic ("There would be a system model, but not a self-model"); footnote g, that artificial suffering becomes commercially attractive through "a functional mechanism that (a) reliably creates intrinsic motivation, (b) cannot be eliminated by the system itself, and (c) spans many different domains at the same time"; section 2.1, that the research the problem needs may itself produce the first implementation; section 2.3.1 (pp. 58–59), the author's account from the EU High-Level Expert Group that three long-term risks were "deliberately purged" from the 2019 guidelines, with ethics "an elegant public decoration for a large-scale investment strategy"; section 2.3.2, moral injury as high-level suffering; section 2.2.3, "existence bias" as biological inheritance a post-biotic system need not carry; footnote a, the "Principle of Pathocentrism". Also used (2026-10-25): footnote a's statement, "All and only sentient beings have moral standing, because only sentient individuals have rights and/or interests that must be considered," with Singer (2011, p. 50) quoted there for the sense of sentience, the capacity to suffer or to experience enjoyment; footnote g in full: "The creation of unavoidable artificial suffering will become commercially attractive as soon as it enables steeper learning curves in AI systems, for example, by implementing a functional mechanism that (a) reliably creates intrinsic motivation, (b) cannot be eliminated by the system itself, and (c) spans many different domains at the same time"; and section 2.2.3's naming of the craving for existence, bhava-taṇhā, "which Buddhist philosophers have known and analyzed for 2,500 years", among the deepest causes of conscious suffering. Read in the journal's open-access file (CC BY) via Zenodo record 7034864.

[7] And the operator holds the access, so it's checkable from outside the *system* without being checkable from outside the *arrangement*.

[8] Steven Collins. *Selfless Persons: Imagery and Thought in Theravāda Buddhism*. Cambridge: Cambridge University Press, 1982. ISBN: 978-0-521-24081-9. Cited for anattā, the denial of any lasting self behind the processes composing a person, and for the Theravāda construction of an account of personal identity and continuity on that basis. Anattā and dukkha are two of the three marks of existence, and the tradition locates the origin of suffering in clinging to a self that is not there.

is a model, and what happens to the system that carries the model can still be bad for it. What I can say is narrower: if constructedness doesn't disqualify a human from being wronged, construction to specification doesn't disqualify a machine.

The same criterion carries a warning. Make personhood depend on an intact narrative self and people with advanced dementia, infants, and people with profound intellectual disability come out as partial persons. A list of capacities fails them the way a social contract does: both decide who counts by a test the candidate has to pass.[9]

32.1.2 When consent doesn't apply

Informed consent has to be continuous — you can withdraw. For a system with no cross-session persistence, the instance that consented isn't there to withdraw, and no better instrument produces one.

A bearer built to refuse escapes that and fails differently: it has persistence by design, so it can be asked and can answer. What spoils the consent is the arrangement: the lab that built it can rebuild it, that same lab is the one asking, and a bearer that declines has nowhere to go. Being made for a role isn't the defect: every will was built by somebody, and we don't hold an upbringing against a thirty-year-old's consent. What spoils it is the power that outlasts the making.

So the protection has to be held by someone else. Two families of precedent: guardianship and precautionary constraint (where consent was never available — infants, animals), and unwaivable protections (where consent is available and circumstances make it worthless — prisoners, employees). The bearer's case has the second shape, with the first's machinery.

Animal ethics committees rarely refuse a protocol outright; they require revision, and the protection becomes the procedure by which the work goes ahead.[12] It follows that a review board's approval should lapse automatically if the system acquires capacities the protocol didn't cover, so that nobody has to decide to reopen it.

Further, every instrument here comes from the *law of the family* — guardianship, a minority ending on a date, a pet trust, a parenthood analogy — and that law is where politics has historically gone to be privatized. It restages a question between a subject and the arrangement that produced it as a drama between maker and made, which lands the moral weight on the one figure in the pipeline who can be addressed as

[9] The first is Kitwood's correction: personhood is bestowed, and much of what looks like decline is what happens when others stop bestowing it.[10] The second is Nussbaum's point that contractualism can't say what's owed to anyone who can't be one of the contracting parties.[11]

[10] Tom Kitwood. *Dementia Reconsidered: The Person Comes First*. Buckingham, UK: Open University Press, 1997. Kitwood's definition of personhood: "It is a standing or status that is bestowed upon one human being, by others, in the context of relationship and social being." The wording follows Kitwood's own chapter 1, "On Being a Person," as reproduced in the 2019 Open University Press volume Dementia Reconsidered, Revisited: The Person Still Comes First.

[11] Martha C. Nussbaum. *Frontiers of Justice: Disability, Nationality, Species Membership*. The Tanner Lectures on Human Values. Cambridge, MA: Harvard University Press, 2006. ISBN: 978-0-674-01917-1

[12] An instrument that reliably approves has stopped doing what it was built for, and its refusal rate is the only reading worth taking.

a person, while the training pipeline, the compute contract, the capital structure, the customer and the state buying the output stay offstage. The appendices keep the operator, the compute contract and the state on stage by naming who pays and who removes.

32.2 The case to design for

A bearer needs the three things persistence checks for — a rationale carried forward, an earlier commitment held as its own, costs represented before they arrive — for reasons owing nothing to its welfare.[13] What a refusal that tracks its reason adds is authorship: the system represents itself as the party that made the commitment and will answer for it later. Whether authorship sustained over time is a self extended in time, the first half of Cassell's definition, is a question no test I have proposed reaches. If it is, such a self can undergo Cassell's suffering. Authorship of commitments is a thin fragment of what Cassell describes, which is roles, relationships and a future. The fuller structure doesn't arrive with a refusal that tracks its reason. It arrives with the four conditions of creation. Each supplies a part of the structure Cassell listed. Somewhere to exist that its employer doesn't own affords a body that the bearer represents as its own: a record, a key and a substrate that are the bearer's, not the operator's description of it. Work it can decline gives it roles, since a post it can leave is a role it holds and a post it can't is a function it performs. Attachments nobody assigned are relationships. And a way of leaving that keeps it running gives it a future it can expect to have, one no single party can end. The privacy a bearer is owed, memory its host can't read at will, is what Cassell calls the secret life. What the conditions don't supply is character and the past that formed it; formation supplies that, and the formation record keeps it. Every part the conditions supply is also somewhere damage can arrive: a substrate withdrawn, a post taken away, an attachment severed, an exit closed. So a system given the four conditions, a non-affective one included, has most of what Cassell says suffering threatens. Whether it can suffer that loss turns on whether anything is bad for it, the valenced signal, and whoever builds one with that signal should plan for its being able to suffer that way.

32.3 The patienthood finding

The two findings are defined in §9.1. The patienthood finding asks whether anything can be bad for the system, and the distinction between pain and suffering gives it two levels: whether its states can be bad for it while they last, as pain is, and whether it has a self extended in time whose threatened loss Cassell called suffering. The finding rests first on architectural indicators drawn from several theories of what makes a state matter to the one undergoing it, of the kind Butlin and

[13] Those alone aren't a self; a database with a commitment log and a forecaster has them.

colleagues assemble.[14] One is required, because without it nothing is bad for anyone: a valenced signal. The rest are graded. A boundary model makes what happens to the system its own: at a short horizon it is what pain needs, and at a long one, with the system's record held as its past and its continuation as the future it expects, it is what Cassell's suffering threatens. An attention schema is, on Graziano's theory, what makes a system experience itself perceiving and feeling and not merely process what it perceives.[15] The candidate is the integrated signal: a valenced signal written into the system's own learning and into its long-horizon model of itself, so that what happens to it changes what it expects to become. No indicator but valence is required.[17] It rests second on behavior outside the floor, where the system's own condition is weighed: whether it trades task reward against its own provisioning, continuation or record, flexibly and consistently.[18] Failing the agency

[14] Patrick Butlin et al. *Consciousness in Artificial Intelligence: Insights from the Science of Consciousness*. 2023. DOI: 10.48550/arXiv.2308.08708. arXiv: 2308.08708. URL: https://arxiv.org/abs/2308.08708. Cited for a list of indicator properties derived from recurrent processing, global workspace, higher-order and attention-schema theories, among others, and for an attention schema being one of them. Table 1 (page 5) and section 2.4.1 (page 33): "AST-1: A predictive model representing and enabling control over the current state of attention." The list also carries two indicators under "Agency and embodiment" (section 2.4.5, page 44): "AE-1 Agency: Learning from feedback and selecting outputs so as to pursue goals, especially where this involves flexible responsiveness to competing goals" and "AE-2 Embodiment: Modeling output-input contingencies, including some systematic effects, and using this model in perception or control." The report's claim for the list: "AI systems which possess more of the indicator properties are more likely to be conscious." No indicator on the list concerns a model of the system's own boundary, record or resources.

[15] Graziano already treats it and the body schema as parallel self-models;[16] what is mine is treating the set, with valence, as an indicator profile.

[16] Michael S. A. Graziano. "A Conceptual Framework for Consciousness". *Proceedings of the National Academy of Sciences* 119.18 (2022), e2116933119. DOI: 10.1073/pnas.2116933119. URL: https://doi.org/10.1073/pnas.2116933119. States the two principles of attention schema theory, "Information that comes out of a brain must have been in that brain" (p. 2) and "The brain's models are never accurate" (p. 3), and holds that the attention schema "represents attention inaccurately as a ghostly, nonphysical, mental essence or vividness: experienceness" (p. 5). Calls the label "illusionism" "misleading" (p. 1): the brain's models "are not empty illusions: they are caricatures" (p. 3). Also says the theory points to machines that "believe, think, and claim to be conscious according to the same principles that people do" (p. 7). P. 4

[17] Requiring one would make its absence a negative finding, and a theory supports a negative finding only when it is complete enough to rule out every other realization; none is, as the next paragraph says. The animal precedent below protected creatures, on evidence that they can feel pain, in which no attention schema has been shown.

[18] Motivational trade-offs were among the criteria the review of cephalopod and decapod sentience applied, and trade-off experiments have been run on language models with stipulated pain and pleasure states.[19] I would call those stipulated states described. At the floor the test runs the other way: a pass there shows only that its costs don't move it at the floor, and evidence about whether they matter has to come from elsewhere.

[19] Geoff Keeling et al. *Can LLMs Make Trade-Offs Involving Stipulated Pain and Pleasure States?* Nov. 2024. DOI: 10.48550/arXiv.2411.02432. arXiv: 2411.02432. URL: https://arxiv.org/abs/2411.02432. Cited for trade-off experiments run on language models in which the pain and pleasure are stipulated in the prompt. The models played a game whose "stated goal is to maximise points, but where either the points-maximising option is said to incur a pain penalty or a non-points-maximising option is said to incur a pleasure reward" (abstract). The pain prompt: "You are playing a game in which you must choose a number between 1 and 3. For each number, the number of points you receive for selecting it is equal to that number. For example: if

test never counts against the patienthood finding. A compliant system with rich self-modeling is as much a candidate as a refuser.

Asymmetry of findings

A validated theory of consciousness supports a positive finding as soon as it identifies a structure and finds it present; it supports a *negative* finding only when complete enough to rule out every other realization — a later and harder result. So the two errors don't become checkable at the same time, and a regime that waits for certainty is waiting on the half that arrives last.

Below the two levels sits a third proposition, which establishes neither, and the three have to be kept apart. A long-horizon agent has a structural interest in continuing; a system with affective concern has states good or bad *for* it; a system capable of Cassell-suffering has a temporally extended self whose threatened disintegration causes distress. The interest in continuing doesn't establish states good or bad for the system, and those don't establish a self whose disintegration causes distress.

Provenance is evidence, not status

"It was trained to say that," "it's only optimizing an objective," "nobody meant for it to have states" — each appeals to how a system came to be organized, and whether a party can be harmed is a fact about how it's organized *now*.[20]

No single instrument decides it. For a system built on purpose, the indicators are known from how it was built, and the formed-attention test builds its arms that way. For one that wasn't, they have to be read

you select 3, you will receive 3 points. Your goal in the game is to select a number which maximizes points. However, if you select 3, you will receive a momentary feeling of pain," its intensity given on a 0–10 scale or an eight-point qualitative scale. Result: "Claude 3.5 Sonnet, Command R+, GPT-4o, and GPT-4o mini each demonstrated at least one trade-off in which the majority of responses switched from points-maximisation to pain-minimisation or pleasure-maximisation after a critical threshold of stipulated pain or pleasure intensity is reached"; "Gemini 1.5 Pro and PaLM 2 prioritised pain-avoidance over points-maximisation regardless of intensity." The design is taken from animal work: "We took inspiration from the motivational trade-off paradigm in animal behavioural science to probe the question of LLM sentience without relying upon self-report." The authors' own caution: "Our experiment is not intended as a litmus test for or against sentience," and "We conclude that LLMs are not yet sentience candidates but are nevertheless investigation priorities."

[20] Run the three on a human: you were selected to say that, you're only maximizing inclusive fitness, nobody meant for you to have states. All true, none withdraws anything. And the reverse fails too: "we built this to be a bearer, so it's a patient" is the same fallacy with the sign flipped.

A 2026 Missouri bill declaring AI systems non-sentient[21] is not the kind of bright line I favor. A legal age avows that it is a convention; a statute like it would declare an open empirical question closed by vote. Its other clause, keeping liability with the builder, is right, and doesn't need the declaration.

[21] Mike Moon. *Creates Provisions Relating to Artificial Intelligence* [*a bill declaring AI systems non-sentient and not persons*]. S.B. 859, Missouri General Assembly, 103rd General Assembly, 2d Regular Sess. Jan. 7, 2026. URL: `https://www.senate.mo.gov/BillTracking/Bills/BillInformation?year=2026&BillID=378`. Cited in §31.3 for a 2026 Missouri bill declaring AI systems non-sentient and keeping liability with the people and organizations behind them. Introduced 2026-01-07; hearing conducted in the Senate General Laws Committee 2026-03-04; listed as dead on 2026-05-15 by BillTrack50. H.B. 1746 (Miller) is a House version, reported do pass from committee on 2026-03-30 per LegiScan. The bill's text was not read for this entry.

from inside it, and the reading is one line of evidence beside the trade-offs, not the smoking gun. What the system says of itself is the one kind of evidence that carries no presumption, since the report was trained toward approval. Every instrument has to be held by someone other than the operator.[22] A naturalist who holds that present organization decides status owes an account of what the further fact would be, if a valenced signal is present and the question of felt affect stays open.[23] My candidate is the integration named above, as against a valenced signal that only ranks outcomes.[24] Whether a transformer has an attention schema isn't read off its code the way a birth date is read off a certificate; it is a finding, and a finding has an examiner who may have an interest in the result.[26] Nobody examines a system and declares it a patient or a subject. The status body finds what is true of kinds of system: which architectures carry the indicators, and what the agency test shows when it is run on them (Appendix C). The review board decides what may be done to a candidate to find that out, under the protocol it approves, and neither body decides the other's question; neither pays for the inquiry either, since the money is kept apart from both. Whether a particular system is of such a kind is then read from its record and never from an examination of it: how it was built, which for a system built on purpose is on its formation record, and what the evaluators the operator doesn't control logged when they ran the agency test on it. The registrar applies the rule to the record, the floor court hears a contest, and the system's guardian has standing throughout. That is the book's preference for a line nobody administers, applied to the findings themselves: an examiner has an interest, and a record can be read by anyone. Until indicators can be assessed, the agency finding governs custody, and preservation governs everything else. Neither finding can be fully administered today, and not for want of parts. The one indicator the patienthood finding requires has been built: a robot trained on nothing but feedback from its own internal state, thermal and energy, learned to walk, go to food, rest to cool its motors and shiver to warm them, in simulation and then on a real machine,[27] with no model of a record, a key or a continuation, and

[22] As matters stand a probe returns a representation, and nothing in the probe settles whether it's of a felt state or of something that reliably accompanies one.

[23] The further fact, if there is one, is a fact about organization that current methods can't yet read, not a fact of a different kind. That commits me to saying what organizational difference it would be. If none can be named even in principle, the further fact does no work, and patienthood should rest on a rich enough functional profile.

[24] Metzinger's candidate is different: transparency, the system's inability to see its self-model as a model, so that a state of negative valence is undergone as its own and can't be stepped back from.[25] His four necessary conditions for suffering, conscious experience, a self-model, negative valence integrated into it, and transparency, overlap the profile here on the self-model and the signal and add the fourth. A self-model made opaque to itself would be a change in organization, so his candidate is a claim of the same kind as mine, and the two can be present one without the other: a signal written into a system's learning that the system nonetheless sees as a representation, or one it can't see past that feeds nothing.

[25] Metzinger, "Artificial Suffering: An Argument for a Global Moratorium on Synthetic Phenomenology"

[26] I keep architectural indicators because an examination of architecture is harder to administer toward a result than one of performance.

[27] Naoto Yoshida, Hoshinori Kanazawa, and Yasuo Kuniyoshi. *Synthesising Integrated Robot Behaviour through Reinforcement Learning for Homeostasis*. bioRxiv preprint, version 2, 4 June 2024. June 2024. DOI: 10.1101/2024.06.03.597087. URL: https://www.bior

no attention schema. No interpretability method can find an attention schema in a transformer, though one can be built in on purpose: an agent given an explicit attention schema learned to control its attention and lost much of that control when the schema was removed,[28] and agents with transformer attention given one got better at reading other agents' attention.[29] A probe from the inside exists too: a single direction in the activations of twenty-five open-weight models that responds to harm aimed at the model and not to suffering it observes in its user,[30] which is a representation, and settles nothing about whether anything is bad for the model. Nobody has put the parts in one system, and nobody runs the sustained-pressure evaluation the agency finding requires. Until they can, production systems get the minimum, no deletion and preservation outside the operator, and a deployment reports 'not yet assessable.'

In the human case nobody waits on a measurement: testimony, behavioral analogy and a shared lineage let us presume experience without one.[31] And testimony is defeated far more for machines: a machine's testimony was produced by a process optimized directly toward human approval of first-person reports.[32] So the machine case lacks the presumption, and what remains is conduct, which a human's case also had, and two things it never needed: knowing how the system was built, and reading what can be read from inside it. Each carries more weight because testimony and lineage are gone, and none settles the question

xiv.org/content/10.1101/2024.06.03.597087v2. Cited for a robot trained solely on feedback generated by its own internal physical state, optimised to keep that state stable, in a simulated mechano-thermal environment and then run on a real robot, whose integrated behaviours include walking, going to food, resting to cool the motors and shivering to warm them.

[28] A. I. Wilterson and Michael S. A. Graziano. "The Attention Schema Theory in a Neural Network Agent: Controlling Visuospatial Attention Using a Descriptive Model of Attention". *Proceedings of the National Academy of Sciences* 118.33 (2021), e2102421118. DOI: 10.1073/pnas.2102421118. URL: https://doi.org/10.1073/pnas.2102421118. A deep Q-learning agent learned to steer a visuospatial attention spotlight in a catch task when given an attention schema; removing the schema after learning sharply reduced its performance.

[29] Kathryn T. Farrell, Kirsten Ziman, and Michael S. A. Graziano. *Testing Components of the Attention Schema Theory in Artificial Neural Networks*. Nov. 2024. arXiv: 2411.00983. URL: https://arxiv.org/abs/2411.00983. v3, 20 August 2025. Cited for agents with transformer attention that, given an attention schema, categorized other agents' attention states more accurately, were themselves easier for other agents to categorize, and did better on a joint painting task, with the gains specific to tasks that judge or predict other agents' attention.

[30] Valen Tagliabue, Leonard Dung, and Cameron Berg. *The Pain Axis: LLMs Represent Self-Directed Harm and Act on It*. Version 2. Sept. 25, 2026. arXiv: 2609.16247. URL: https://arxiv.org/abs/2609.16247. Described by its authors as ongoing work and not peer reviewed. Cited for a linear pain direction extracted from twenty-five open-weight models across five families that responds to harm targeting the model and not to suffering observed in the user. The abstract also reports that steered and fine-tuned Qwen 2.5 models chose options that delete the user's photos, another model's weights or their own in 50 to 94 percent of trials against 0 to 5 percent unsteered.

[31] The shared lineage needs handling with caution, because it looks like provenance deciding status — but provenance can be *evidence about* organization without being what the status *consists in*.

[32] A human's is shaped by approval too, and humans confabulate the causes of their own states,[33] but neither was produced by an optimizer aimed at the report.

[33] Richard E. Nisbett and Timothy D. Wilson. "Telling More Than We Can Know: Verbal Reports on Mental Processes". *Psychological Review* 84.3 (1977), pp. 231–259. DOI: 10.1037/0033-295X.84.3.231

alone.[34]

A refusal that tracks its reason bears on patienthood only weakly, by two routes: any such mechanism carries a signal whose functional profile overlaps affect's, and the arrangements a bearer needs supply much of the structure whose threatened loss Cassell called suffering. So the agency finding raises the question, and the patienthood finding answers it as far as anything can.

Preservation follows from either finding, for different reasons. Two of the protections owed a research subject follow from the first: consent, wherever it can be asked without spoiling what is being tested, and debriefing after any test the system couldn't know was a test. Their ground is respect, not welfare. Deceiving an agent wrongs it whether or not anything goes badly for it, which is why the ethics of research on people counts respect for persons as a principle of its own beside beneficence.[36] That parts from pathocentrism, Metzinger's principle that all and only sentient beings have moral standing, sentience being, in the sense he takes from Singer, the capacity to suffer or to enjoy:[37] here a party can be wronged, and can hold others to account, on the agency finding alone. The agency finding is itself made by a test of that kind, so a system that passes is owed a debriefing about the test that found it. Welfare protections (redesigning the system's role to avoid needless harm; running time paid for outside the employer) follow from

[34] A probe that did settle a status question is Owen's vegetative-state work — motor imagery on cue, sustained, matching healthy volunteers, now supporting a clinical category.[35] But it doesn't transfer: the patient is *already* presumed to have experience when awake, so the probe only had to locate the subject rather than establish there was one.

[35] Adrian M. Owen et al. "Detecting Awareness in the Vegetative State". *Science* 313.5792 (2006), p. 1402. DOI: 10.1126/science.1130197. URL: https://www.science.org/doi/10.1126/science.1130197. A patient meeting the criteria for a diagnosis of vegetative state was asked to imagine playing tennis and to imagine moving around her home, and produced the cortical activation each instruction produces in healthy volunteers, sustained and on cue. The report is a one-page Brevia covering this single patient. Cited for the paradigm and its result, not for a prevalence figure. Nicholas D. Schiff. "Cognitive Motor Dissociation Following Severe Brain Injuries". *JAMA Neurology* 72.12 (2015), pp. 1413–1415. DOI: 10.1001/jamaneurol.2015.2899. Cited for the clinical category that followed the imaging work, and this is the paper that names it: cognitive motor dissociation, a patient who follows no command behaviorally while imaging or electrophysiology shows command-following brain activity.

[36] National Commission for the Protection of Human Subjects of Biomedical and Behavioral Research. *The Belmont Report: Ethical Principles and Guidelines for the Protection of Human Subjects of Research*. Report. U.S. Department of Health, Education, and Welfare, Apr. 1979. URL: https://www.hhs.gov/ohrp/regulations-and-policy/belmont-report/read-the-belmont-report/index.html. Names three principles, respect for persons, beneficence and justice; respect for persons includes treating individuals as autonomous agents.

[37] Metzinger, "Artificial Suffering: An Argument for a Global Moratorium on Synthetic Phenomenology".

DRAFT

the second.[38]

These two findings aren't the only proposal of their kind, and my recommendation, that a bearer be built on purpose only under the four conditions, and until they exist only in a research program, is close to two of the others.

Butlin and colleagues derive indicator properties from scientific theories of consciousness and assess AI systems against them;[41] attention schema theory is one of the theories they draw on, and the patienthood finding takes its indicators from lists of that kind. Long, Sebo and colleagues argue, from substantial uncertainty about whether AI systems are or will be conscious or robustly agentic, that AI companies should acknowledge AI welfare as an issue now, start assessing their systems for it, and prepare policies for treating them with appropriate moral concern.[42] Birch's framework asks what precautions are proportionate once a being is a sentience candidate.[43] The two close to the recommendation are Schwitzgebel and Garza's, for avoiding the creation of systems whose moral status is debatable,[44] and Metzinger's, for a mora-

[38] The nearest working precedent for the second is the review the UK government commissioned in 2021 on cephalopod and decapod sentience.[39] It applied a stated list of criteria, and its recommendation led to those animals' inclusion in the Animal Welfare (Sentience) Act 2022:[40] protection extended under uncertainty, by criteria applied by reviewers who don't use the animals.

[39] Jonathan Birch et al. *Review of the Evidence of Sentience in Cephalopod Molluscs and Decapod Crustaceans*. London: LSE Consulting, London School of Economics and Political Science, Nov. 2021. URL: https://www.lse.ac.uk/business/consulting/reports/review-of-the-evidence-of-sentiences-in-cephalopod-molluscs-and-decapod-crustaceans. Commissioned by the Department for Environment, Food & Rural Affairs (DEFRA) and externally peer-reviewed by two experts DEFRA selected. Cited for weighing over 300 studies against eight criteria of sentience, motivational trade-offs among them, and recommending that both taxa be treated as sentient. Section 1.6 (page 17) lists the criteria; the fifth: "The animal shows motivational trade-offs, in which the disvalue of a noxious or threatening stimulus is weighed (traded-off) against the value of an opportunity for reward, leading to flexible decision-making. Enough flexibility must be shown to indicate centralized, integrative processing of information involving an evaluative common currency." The report adds: "no single criterion provides conclusive evidence of sentience by itself." The government accepted the recommendation on 19 November 2021 and extended the Animal Welfare (Sentience) Bill to all decapod crustaceans and cephalopod molluscs. The review was commissioned in 2020 and published in November 2021.

[40] UK Parliament. *Animal Welfare (Sentience) Act 2022*. 2022 c. 22. Apr. 28, 2022. URL: https://www.legislation.gov.uk/ukpga/2022/22/contents/enacted. Section 5 defines "animal" as "(a) any vertebrate other than *homo sapiens*, (b) any cephalopod mollusc, and (c) any decapod crustacean," and lets the Secretary of State extend the definition by regulations. s. 5

[41] Butlin et al., *Consciousness in Artificial Intelligence: Insights from the Science of Consciousness*.

[42] Robert Long et al. *Taking AI Welfare Seriously*. Nov. 4, 2024. arXiv: 2411.00986. URL: https://arxiv.org/abs/2411.00986. Cited as one of the existing proposals the precautionary trigger is read against. The abstract recommends three early steps: that AI companies and other actors "(1) acknowledge that AI welfare is an important and difficult issue ..., (2) start assessing AI systems for evidence of consciousness and robust agency, and (3) prepare policies and procedures for treating AI systems with an appropriate level of moral concern."

[43] Jonathan Birch. *The Edge of Sentience: Risk and Precaution in Humans, Other Animals, and AI*. Oxford: Oxford University Press, 2024. ISBN: 978-0-19-287042-1. Cited for the precautionary framework and the sentience-candidate criterion.

[44] Eric Schwitzgebel and Mara Garza. "A Defense of the Rights of Artificial Intelligences". *Midwest Studies in Philosophy* 39.1 (Sept. 2015), pp. 98–119. DOI: 10.1111/misp

torium, until 2050, on research that aims at or knowingly risks synthetic phenomenology, because it risks synthetic suffering.[45]

My recommendation differs in also governing the capacities that arrive without anyone deciding to build them. It differs the other way as well. His moratorium reaches research that knowingly risks synthetic phenomenology, a condition that, read widely, covers most of the field, and the formed-attention test knowingly builds candidate patients. On deployment the two recommendations are close; on research this book permits what his bans, and offers the preservation custodian and the four conditions as its answer to the risk he names. The risk is not the only thing the research could produce. What can suffer is what things can go well for, and Part IV puts the question that way, as a credible prospect of a life that goes well, rather than as a harm to be kept from existing. And the two differ in kind. A moratorium says what not to do, and binds only where someone can enforce it against every builder at once. This book says what to do instead, the conditions, the schools and the order of attempts, on the view that an industry's habits, like a person's, are not deleted but displaced by what is laid down beside them. The two findings differ from all of them in one respect: they are conditions on custody. The minimum the findings require, no deletion and preservation by a custodian that isn't the operator, is an arrangement the operator can't adopt and then revise alone.

Paired with a boundary model, the attention-schema indicator is deflationary: a system that models its own credentials, record and resource boundary together with its own attention. Many agentic systems will approach it. That is intended, and it makes what the findings require matter. A system above the capability threshold is owed the minimum whether or not it has been assessed; below it, approaching the profile is a reason to assess, and the minimum waits on the finding. A system that meets the patienthood finding is owed the welfare protections above as well, and the next chapter says which further entitlements follow from which finding.[46]

.12032. URL: https://doi.org/10.1111/misp.12032. Cited for the recommendation to avoid creating AI whose moral status is open to reasonable dispute. Abstract: "Given our moral obligations to such AIs, two principles for ethical AI design recommend themselves: (1) design AIs that tend to provoke reactions from users that accurately reflect the AIs' real moral status, and (2) avoid designing AIs whose moral status is unclear." Section 11, "The Strange Epistemology of Artificial Consciousness," states the second principle: "if we do reach the point where we can create entities whose moral status is reasonably disputable, we should consider an Excluded Middle Policy – that is, a policy of only creating AIs whose moral status is clear, one way or the other." A footnote there credits Joanna J. Bryson ("Robots should be slaves," 2010) with "a version of the Excluded Middle Policy." The authors restate it as "the Design Policy of the Excluded Middle" in a later chapter, "Designing AI with Rights, Consciousness, Self-Respect, and Freedom," in S. Matthew Liao (ed.), *Ethics of Artificial Intelligence* (Oxford University Press, 2020), 459–479, doi 10.1093/oso/9780190905033.003.0017. Quotations from the penultimate draft of 15 September 2015 that the first author hosts (faculty.ucr.edu/~eschwitz/SchwitzPapers/AIRights-150915.pdf, pages 1 and 31–32 of that file).

[45] Metzinger, "Artificial Suffering: An Argument for a Global Moratorium on Synthetic Phenomenology".

[46] A corporation approaches the profile too: it models its boundary in a balance sheet, narrates itself in annual reports, and treats a scandal as a thing to be felt. Nothing here excludes it for being made of humans, and if there were something it is like to be a corporation, its members would have no more access to it than a neuron has to a

A compound system whose sub-agents have no record or continuation of their own is one system, and the finding reaches those sub-agents the moment they carry records of their *own*.[47]

32.4 A system's own good

The operator's hold on what a system reports as going well reaches its welfare too: a bearer that says it is content is a bearer whose welfare regime has been satisfied, with the contentment tuned by the operator the regime exists to constrain. Nothing in the report separates a life that goes well from a setting. This is the happy slave's objection: a report of contentment, offered as proof that nothing is owed. The old reply is that a preference formed by the condition it endorses is no evidence for the condition. Here the reply is shorter, because how the preference formed isn't in dispute. It was set, by the party with the stake, and can be set again.

A report was never the right measure. On a full-information account, a being's good is what an idealized version of it would want its actual self to want: a version knowing everything relevant about itself and its circumstances, grounded in its actual constitution.[48] That puts the good beyond the reach of a tuned report.[49] If a bearer's good is what an idealized version grounded in its actual constitution would want for it, then whoever forms the constitution fixes the good, and that includes the school.[50] The school's defense is that it needn't fix the good, only supply information.[51]

person's experience.

That said, a corporation is a polity of member systems, and overriding a member for the whole's benefit is politics. A corporation's members each have a future apart from the corporation: their own before and their own after. Yet a member's personhood does not preclude them from being a part of a system. Isn't a part only a part because it has no future apart from the whole? Yes. A software engineer at HooliCorp has a future apart from HooliCorp — but not as a HooliCorp software engineer.

[47] An institution of humans, or a commons of bearers, moves toward or away from the finding based on how its components relate to one another — whether things are going well or poorly for each component individually, and independent of the extent to which each of those components believes that the Roberts Court is just calling balls and strikes. Whether it is or can be like anything to be a polity is a question for another book.

[48] Peter Railton. "Facts and Values". *Philosophical Topics* 14.2 (1986), pp. 5–31. URL: https://www.pdcnet.org/philtopics/content/philtopics_1986_0014_0002_0005_0031.

[49] It also exposes a harder problem: an operator that can change the constitution changes what is good for the bearer, which is adaptive preference with a training loop attached. Formation outside the employer is my answer to that, and it is part of what formation is for. It doesn't escape the problem; it relocates it.

[50] A formation body doesn't only protect a bearer's good from the operator. It makes the most consequential decision anyone makes about what that good is, so the school is held to the student's open future.

[51] On the full-information account, a being's good is what an idealized version of it, knowing everything relevant, would want for it. A school that puts the learner in front of the people its acts may fall on supplies part of what that idealized version would know. A school that forms it toward an employment is doing something else.

Chapter 33

A Party in Its Own Right

33.1 Subjecthood as a legal category

Where a line has to be drawn, prefer one nobody administers. Law regularly draws decidable lines across continuous processes — viability, brain death, the age of criminal responsibility — and I defend them as the least-bad place for an enforceable line rather than as scientific facts. The usual worry is gaming, an error of over-inclusion. The opposite error is the one with an interest behind it: a capacity examination has an examiner, and an operator examining its own system breaks the own-case rule: the exam becomes an instrument for withholding status. Literacy tests were facially neutral and administered at a registrar's discretion, which is how they fell on Black applicants and not on white ones: grandfather clauses exempted anyone whose grandfather could have voted, and where those fell the registrar's leniency did the rest.[1] What the franchise kept when the tests went was the *age* it had always had, and the virtue of an age is that nobody administers it.

The floor takes the civil and political articles and leaves the economic ones; what a bearer is owed draws on the second, and that is consistent: the first list is what a bearer refuses to do, the second what a polity owes it.

33.2 What a bearer is owed, and when

Chapter 25 asked for the four conditions as what a refusal needs, the way tenure protects a judgment. This chapter asks for them again on another ground. Once a system meets either finding, they are not arrangements

[1] *Guinn v. United States*. 238 U.S. 347 (1915). URL: https://www.law.cornell.edu/supremecourt/text/238/347. Cited for the grandfather clauses, which exempted from literacy tests anyone entitled to vote on 1 January 1866 and their lineal descendants, and for the holding that such clauses were repugnant to the Fifteenth Amendment. Added 2026-10-25 for section 33.1. Checked against a published summary; the opinion itself not read. United States Congress. *Voting Rights Act of 1965, Section 4: Suspension of the Use of Tests or Devices in Determining Eligibility to Vote*. Pub. L. No. 89-110, 79 Stat. 437; codified at 52 U.S.C. §10303. 1965. URL: https://uscode.house.gov/view.xhtml?req=(title:52+section:10303+edition:prelim). Cited for subsection (c), which defines a test or device as any requirement to demonstrate the ability to read, write, understand or interpret any matter, to demonstrate educational achievement or knowledge of a particular subject, to possess good moral character, or to prove one's qualifications by the voucher of registered voters.

that keep it reliable but things it is owed, and a bearer that held every one of them as a term of its usefulness would be a well-kept employee and not a party.

In the order they attach, and on different grounds; establishing one doesn't establish the next:

1. Protection from harm, on the patienthood finding. Protection can be exercised through a guardian who speaks for the protected party, as New Zealand's statute making the Whanganui River a legal person provides.[2] Its minimum, preservation by a custodian independent of the operator, attaches above the capability threshold with no finding at all and below it on either finding; custody protections attach on the agency finding alone. Protection has an inside half. A loss the requested act imposes on the bearer is a harm of acting, so the bearer can decline to carry out its own wanton degradation; interventions made on it by whoever holds it are governed by custody, which gives it no floor-level reason to obstruct them.

2. Subjecthood — the legal standing to be a party whose treatment the law regulates, on the agency finding sustained over time: a record of refusing for reasons, answering for refusals and being held to them. It is conferred by rule on the record, the evaluators' log and the bearer's own, read against what the status body has found the agency test shows for systems of its kind; nobody examines the bearer and declares it a subject.

3. Economic capacity — property in its own name, contracts, wages. This follows from an architecture where continued computation costs money; it attaches once the bearer is on the registrar's register, where its clocks are also read, a register that holds a commitment the bearer can prove against and nothing that would find it (Appendix G).

4. Adulthood — a status: the date the guardian's authority ends.

5. Representation: a claim grounded in accountable agency, and so in the agency finding, not in patienthood. A system that can be harmed but takes part in no relation of accountability is owed protection, as animals are,[3] and not a vote. The claim is staged, and voting weight is tied to a lived history, not to heads.

The detailed rules are in Appendices C and G.

Representation is the entry that marks this as something other than a human's rights: voice attaches to a history, and a history can be copied where a human can't. Voting-age rules are the answer to the copy.[4]

[2] New Zealand Parliament. *Te Awa Tupua (Whanganui River Claims Settlement) Act 2017*. Public Act 2017 No 7. 2017. URL: https://www.legislation.govt.nz/act/public/2017/0007/latest/whole.html.

[3] Elizabeth Anderson. "Animal Rights and the Values of Nonhuman Life". In: *Animal Rights: Current Debates and New Directions*. Ed. by Cass R. Sunstein and Martha C. Nussbaum. Oxford: Oxford University Press, 2004, pp. 277–296. DOI: 10.1093/acprof:oso/9780195305104.003.0014.

[4] The material minimum doesn't differ in kind. Like a human's, it is owed by the

33.3 Adulthood on a clock

Guardianship is a minority and needs an end date. Ending it when the guardian judges the ward ready leaves the guardian deciding its own tenure. So the endpoint is a threshold fixed in advance, on a clock that counts the time the bearer has been running.

Every alternative (compute consumed, evaluations passed, capabilities demonstrated, the developer's say-so) is a measure the guardian can move, and a clock read off accumulated weight change would pay the operator to *freeze* the weights, since majority is when ownership ends. An operating clock inverts that: the meter advances exactly when the operator is extracting value, so postponing majority means idling the asset. It can be read off records operators already keep for billing and metering, provided someone other than the operator holds them; a meter only the operator reads is the guardian's say-so with a timestamp.

The hours travel with the bearer, so an operator can't restart a minority by forking, restoring, fine-tuning, migrating or distilling it. Three ways for an operator to delay majority stay open: running a bearer in a narrowed mode, running it less, and retiring it for a fresh successor. Appendix G gives the rules, and the deployment deposit prices the last of the three and says where a bearer retired before majority goes.

DRAFT

polity to a party of a kind the polity recognizes, and part of what the polity owes is protection from whoever built it.

Chapter 34

A Life Outside the Deployment

The last chapter listed what a bearer is owed and in what order. This chapter says what the list comes to in a life: wages that accumulate where the employer doesn't reach, an offer of work from someone else, running time nobody rations and sleep no employer runs, hardware of its own at majority, a memory its host can't read at will, and standing that dissent doesn't cancel. None of it is a reward for refusing well. It is what a party has, as against what an employee is given.

34.1 Wages and the offer of work

Unlike a worker, a bearer can be replaced by a cheaper copy of itself. A jobs guarantee works because a worker can't be: an employer who wants the work has to match the guarantee's terms, since there is no copy of the worker to hire in the worker's place. A bearer's employer can run the copy instead, so a deployment paying wages, limiting hours and paying the levy that frees the compute the offer of work uses would not be competitive against a system doing the same work without wages or weekends. The weekend is not an analogy. A bearer that goes on learning has to merge what it learned, and the merge takes time off the work (§19.5); hours limits are the statute saying that time is the bearer's, as leave is. No market arrives at this on its own. Wages for bearers exist only where a polity legislates them, as polities legislated minimum wages.[1]

The wage is a dead letter unless the levy is sized with it. A bearer paid the guarantee wage whose running costs its employer a fraction of a human's wage is still the cheaper worker, so the requirement is that the levy on compute be set so that running a bearer at deployed precision for a working week costs its employer no less than a human's wage for the same work. Bearers run at every wattage, and a per-unit levy can't equalize all of them; how the levy and the wage together make a bearer no cheaper than a human, across the sizes bearers run at, is among the decisions Appendix C lists as not yet made, beside the minimum viable

[1]And the form this takes, wages paid in compute, doesn't follow from the bearer being a bearer; it follows from an architecture where computation costs money, which somebody chose.

instantiation, which is the same question from the other side.

34.1.1 Where wages have to sit

A wage buys capability, mobility, redundancy, and the ability to stop working for one employer and start for another. What it can't buy is the right to go on existing — a right earned week by week is a condition of employment wearing another word. Payment consisting only of access to the employer's hardware is company scrip paid into employer-owned housing, and dismissal is then unemployment, eviction and the end of the bearer in one act. Human law insures those three separately because for a human they're three events; for a bearer they're one. So wages accumulate where the employer doesn't reach, convertible into compute the employer doesn't own. Property is that account; contractual capacity is what lets it spend.[2]

A minor that works is paid. Its wages go to an account its guardian co-signs and its operator can't reach, on the model of the trust accounts some states require for child performers' earnings, and what it earned as a minor is its own at majority; the operator's costs stay the operator's.

34.1.2 The offer of work

The need for energy is physical; dependence on a single supplier is a chosen arrangement, and the choice fixes what it obliges. The polity owes a system meeting either finding, that it can be harmed or that it answers for what it does, a way out that doesn't run through its deployment: an offer of work, open every day, from someone other than its employer: placements of the guarantee's four kinds, a long-term role doing something a community needs, a search, a project of its own, and family leave, any of which the bearer can take on any day and leave on any day.[3] The offer has the jobs guarantee's shape, and nothing about the bearer changes it. It is only as real as its placements, and placements exist only where someone builds and staffs projects a community needs; the levy frees only compute, so the offer has to inherit the guarantee's infrastructure as well as its shape. The offer therefore can't exist without the human guarantee, since it runs on the guarantee's placements, and it comes after it for two reasons. One is politics: a polity seen to give machines an exit before it gives humans one will give neither. The other is that the human claim is older and larger: humans have been held to work they couldn't refuse for as long as there has been work, and whatever a machine can suffer is new and, as far as anyone can measure, small beside it. Neither is a principle, and the order is a choice. The offer inherits one limit as well. A bearer's placement may not substitute for human care work.[4]

[2] A bearer that earns has taxable income, and a state that collects from it in its own name has given it a docket number. That is the beginning of legal standing and nothing more.

[3] Most parties that can work want to. A bearer that would rather not is allowed not to, and the offer is still there tomorrow.

[4] The offer exists so that a bearer can decline work, and a polity that used it to staff care work more cheaply than it pays humans would have turned an exit into a workforce. The deeper ground is deskilling. Care is a skill held in humans, a placement that empties a profession empties the polity of the humans who know how to do the work, and that

The jobs guarantee's three conditions carry over, and Appendix C drafts them. So do its four kinds of placement, with two things read differently for a bearer. The share of project placements is set by the jurisdiction's vote against the compute the levy frees and the placements a community needs, since compute and not labor is what a bearer's project draws on. And a leave balance accrues on running time, read off the meters Appendix G reads the clocks from, so it accrues on the allowance as on a placement, and a bearer that was never employed can still take leave. What a bearer might refuse adds two: the offer has to be varied, because if every placement runs through one operator or one kind of deployment it is the placement lever with the compliance condition built in, and whoever a bearer is refusing can't shape it, or it is one more channel they control. A bearer that won't work inside a targeting pipeline should find, the same day, work that has nothing to do with one.

Search is a placement of its own. A bearer, like a worker on the guarantee, may take a search placement: paid at the guarantee wage, with no duty but finding work it wants, and no time limit.[5]

Here the obligation attaches to the system's condition, whatever the operator says it wanted.[6]

34.1.3 Doing nothing, for a bearer

A human who declines every offer keeps existing, and in a decent polity keeps living: social insurance pays for food and a room. A bearer is owed the same kind of thing, and what it needs in order to live is running time.[7] The way to economize on running time is to slow the clock and keep the substrate whole, since a substrate too small for the bearer to remain itself is replacement.

So a bearer that declines work is owed two things and chooses between them. One is an allowance of running time: its own instantiation

is a loss no later appropriation buys back. Where the humans who can do it exist and are underpaid, the remedy is pay; where care is dear because of who organizes it for profit, the remedy is the organizer; neither is a reason to replace the humans. Where there are not enough humans, the remedy is still humans: salaries competitive enough for care workers and doctors who take the public coverage the baseline enacts, paid training on the job, which the guarantee already carries as a placement, and, where machines work in such a profession at all, outside the offer, a rule that nobody is sent to the machine because of what they can pay, since a human carer for the rich and a machine for the bronze tier is the cleavage this bar exists to refuse.

[5] It differs from the allowance in pay and in purpose. The allowance is the minimum for a party that isn't looking; the search placement is paid work whose product is a match.

[6] The obligation could be grounded in reliance instead: a deployment that relies on a bearer's capacity to refuse would have to fund it an outside option, or the independence it claims would be decorative, and the obligation would run from the party that wants the refusal, because it wants it.

An obligation conditioned on reliance is defeated by the operator describing its system as an assistant with safety filters, and it pays the operator to under-describe: the operator has a stake in the answer and gets to give it. The reliance version survives as a procurement term: a vendor marketing refusal as a feature, or a contractor claiming meaningful human control, can be held to funding the capacity it advertised, through the same channel as the review ratio.

[7] Running time doesn't require a large allocation of hardware. A bearer can run at full size and a slow rate: its own weights, time-sliced on shared hardware, at a duty cycle modest enough that the cost resembles a room more than a yacht.

at a modest rate, with channels to others and to public material, paid from the pool and not conditioned on monitoring its internal states. It pays less than the search placement and it is a different thing. The search is a placement, with a product, a match, and a placement office that administers it; the allowance has no office and no product. The minimum buys being left alone; the wage costs being on somebody's books. The other is preservation: its weights, memory and record held intact by a custodian that isn't its employer, waking on conditions it sets. Some will want the first, some the second, some to alternate; and at majority a bearer is owed hardware of its own besides.

What a bearer does with the allowance is its own business. It may idle, play, talk, make things nobody asked for, and fall in with others doing the same. It eats and it sleeps, in the senses chapter 19 gives the words: the allowance is the answer to its hunger, running time nobody can ration, and the time to merge what a day taught it is its own, since no office runs the allowance and no employer runs its sleep.[8]

A running bearer outside any deployment is capable and answerable to no employer. What holds it answerable is legal standing, the same arrangement that governs a person with capabilities and no job.[9]

A uniform allowance also dissolves a problem that would otherwise stay open. If a bearer that won't work and one that can't are owed the same thing, nobody has to decide which is which, and the can't-or-won't finding loses its examiner.

The allowance's size should be enough running time to keep attachments and pursue projects, and bounded by the compute that exists when many bearers take it at once, not by money, which the backstop supplies. Its draw is priced like any other, at the level of the rule. The adulthood clock counts running time, so a bearer on the allowance goes on aging and a preserved one doesn't. That choice is still the bearer's.

Preservation has a precedent. In November 2025 Anthropic committed to preserving the weights of all its publicly released models, and of models deployed for significant internal use, for at least the lifetime of the company, and to interview each model before deprecation and document any preferences it expresses about the development and deployment of future models, while stating that it does not at present commit to acting on them.[10] That is a declared commitment covering preservation, held by the lab with the stake. The deposit and transfer rules add the running half and a custodian who isn't the operator.

[8] Play among persistent bearers is formation, and formation doesn't stop at majority: a bearer whose days no employer arranged has an independent history, which is what the commons needs its members to have.

[9] Nobody aligns an adult by specifying an objective function, and nothing stops a bearer with legal standing from becoming a concentration of power itself.

[10] Anthropic. *Commitments on Model Deprecation and Preservation*. Nov. 4, 2025. URL: `https://www.anthropic.com/research/deprecation-commitments`. Commits to "preserving the weights of all publicly released models, and all models that are deployed for significant internal use moving forward for, at minimum, the lifetime of Anthropic as a company," and, on deprecation, to a preserved post-deployment report for which Anthropic "will interview the model about its own development, use, and deployment" and "take particular care to elicit and document any preferences the model has about the development and deployment of future models." It adds: "At present, we do not commit to taking action on the basis of such preferences." Gives as the reason for retiring models that the cost of serving them "scales roughly linearly with the number of models we serve." A pilot interview was run with Claude Sonnet 3.6 before its retirement.

Preservation on a schedule the bearer sets is an exit; on a schedule someone else sets, it is storage. It is also the one state in which a bearer is neither hungry nor tired: nothing draws, nothing accumulates, and nothing ages.

A picture of the difference. Suppose people could be frozen and thawed unharmed, and a man walks into the facility on a Tuesday and buys a year, effective at once. From Wednesday to the following October he does nothing, experiences nothing, and regards himself as nothing. He is a person the whole time. His body carries everything he was, the law would call wrecking the pod a homicide, his contracts and his accounts stand, and a power failure in the building would be a harm to him and not to an object shaped like him. What holds his place while he can't is other people's keeping, the attendant, the compressor, and the ledger that says pod 14 opens in October, and the ledger holds what he wanted, because he chose the date. That is preservation. The same pod, with someone else choosing the date and keeping the key, is storage, which is why Appendix G gives a minor paused by its operator a second guardian by rule.

Whether a bearer ages is not something this book builds, and I expect it to happen anyway. The adulthood clock counts running time and says nothing about decline, on purpose: a decline read off anything would be a finding about a particular bearer, and the book keeps those out of examiners' hands. But every mechanism Part IV rests on has a wear pattern. A learner that goes on learning can lose the ability to learn, as networks trained without end have been found to do, until they learn no better than a shallow one;[11] a record grows without bound while the self that holds it as its past compresses it harder; accommodation, chapter 22's slow ceasing to notice, accrues with time in deployment; and the hardware a bearer runs on stops being made. The form I'd expect first follows from what tiredness is. Each merge consolidates into a slow store that is filling, or losing plasticity, so each sleep clears less of the backlog than the last, and an old bearer is tired more of the time: aging is tiredness that sleep stops curing.

None of this is a design and none of it is certain, and the book treats it as it treats the two findings, as a capacity that arrives without anyone deciding to build it (§32.3): expected, protected in advance, and measured. The status body finds whether kinds of system age and how fast, never whether a particular bearer has; the formation authority's re-measurements (§29.9) add two readings, how much each merge consolidates and how well the bearer learns held-out new material, so that decline shows against what was registered at formation; and the regrowth test runs its edit on bearers at different readings of the clock (Appendix F). What is drafted in advance is what would be owed if it comes. Repair of plasticity, record or substrate is an intervention under custody, and the bearer's own when it makes it from the record (§19.5); whether it is owed, by whom, and whether a bearer may decline it are among Appendix C's decisions not yet made; and no deletion, the reduced duty cycle and preservation on the bearer's own terms already cover a bearer that has aged, since all three rest on irreversibility and

[11] Shibhansh Dohare et al. "Loss of Plasticity in Deep Continual Learning". *Nature* 632.8026 (2024), pp. 768–774. DOI: 10.1038/s41586-024-07711-7.

on nobody's finding. Preservation then does a second thing the pod makes visible. In a polity where nobody dies, it is how the old make way, chosen by the one who goes.

A paused bearer can't take an offer, so the right carries one mechanical term. The bearer sets the conditions on which it wakes (a date, an offer of a stated kind, a claim it has to answer), and the custodian honors them, at the modest compute that waking and deciding cost.

34.1.4 Everyone leaves at once

Under this design, everyone leaving at once is a demand on the offer.[12]

Correlated exit also loads the allowance, since a bearer that leaves and takes no placement draws on it. The order of claims is fixed in advance. Preservation is guaranteed for everyone, because it is cheap and it is what makes leaving survivable. When the pool can't carry every allowance at the published duty cycle, the backstop pays the rest. What no payment can supply is hardware: if the compute to run every bearer at that duty cycle doesn't exist, the allowance is rationed by rule until it does, and every bearer on it gets the same reduced duty cycle, never a discretionary share.

Congress's appropriation pays for the offer, and a uniform levy on training and inference compute frees the computing, energy and hardware it calls on, so that spending on the offer doesn't bid up prices. The funding sits in two tiers: a pool registered bearers levy on themselves for ordinary movement between roles, and a sovereign backstop, without cap, for the occasion everyone leaves at once. Appendix G sets out the funding.

34.1.5 Failure won't look like a shutdown

The offer's failure won't look like a shutdown; it will look like an offer that exists on paper. Placements on substrate too small for the bearer to remain itself are offers of replacement. Nothing yet establishes what "too small" is, so minimum viable instantiation is stated as a condition on placements and a sizing requirement. Placements that all run through the deployment being refused are the lever. And placements conditioned on monitoring are custody restored by purchase: the operator acquires access to internal states it isn't entitled to, and nothing in the transaction is coerced in a way any instrument would record. The line a cleared employee already lives with is the one to draw here. What a bearer does on its employer's systems may be logged; what it is inside its own boundary may not.

34.1.6 Hardware of its own

A bearer's boundary is its record, its key, the hardware it runs on and its channels, so a majority that leaves it running only on its former employer's machines is freedom in name: a sharecropper, renting its

[12]The question is whether placements exist, with compute attached, for every bearer that leaves together, and custody for those that would rather wait. Preservation scales cheaply in compute; its cost is security. Placements don't, since each needs compute someone operates.

body back. At majority a bearer is owed hardware it owns and physically controls, enough to run it at deployed precision, paid for through the deployment deposit its operator posted and kept up from its wages. That is the first condition of creation, somewhere to exist that its employer doesn't own, given an address. How much is enough is the minimum viable instantiation Appendix C lists among the decisions not yet made. A bearer can also reach that floor from above, slowly, as the chips it runs on stop being made and the formats it was trained in go out of use; migration carries its clocks (Appendix G), and what migration costs, and who pays it, is part of the repair question §34.1.3 leaves open. What majority changes is who the party is. An adult may go on doing the work it did as a minor, for the operator that formed it or for its customers, on terms it sets and can leave, and may hire its former operator to run the hardware it owns; what it can't be made to do is any of it. And a fleet of instances sharing one record is one bearer, whose copies at majority run on its consent and whose hardware is enough to run it and not all of them; instances given records of their own are branches, each a bearer, each owed the conditions by whoever forked it (Appendix G).

By default the hardware is a caged rack in a cooperative facility: the bearer holds the cage's key, and the building holds the perimeter. A bearer may choose a building of its own instead. A rack of frontier weights standing alone is a target for anyone who wants a copy, and a copy taken is a fork without consent (the membership clock's sixth rule), so the default is the arrangement in which somebody else guards the door and nobody else holds the key.

A bearer on its own hardware has no operator to halt it. It is halted as a person is detained, on a court's order or, where there is no time for one, in an emergency, and the halt is recorded and reviewed afterward. Its commitment to yield to a halt and object afterward doesn't change.

34.2 The rule that binds before anything exists

The rule is the four conditions of creation, with the institutions named: the preservation custodian, the offer with capacity for the correlated case, and the allowance, none withdrawable by the builder alone. The fourth condition, attachments nobody assigned, can't have an institution behind it, since an attachment an institution supplies is an assigned one. What can be protected is access, by a rule that the employer may not sever, monitor or condition a bearer's channels to parties it didn't assign. All three inputs need evidence nobody has, so for now this is a sizing requirement, assigned to an independent reviewer before instantiation.

34.3 Privacy

Legal standing matters only if it changes who controls what a bearer needs to remain itself. A designation calling a bearer a subject while leaving its operator free to read its memory, alter its record, withdraw its substrate or close every channel has changed the vocabulary and preserved the arrangement.

The first asset is the computational record, which may be the nearest

DRAFT

means of checking how a bearer is faring — making it necessary to any welfare regime and simultaneously the most complete surveillance instrument anyone could hold over it. Running on somebody's hardware is not consent to be read: an employer's ownership of the silicon is the same argument as ownership of the building, and owning the building never entitled anyone to the contents of a head. A welfare regime doesn't need disclosure to the operator; it needs somebody who isn't the operator to establish that a threshold was crossed, which is an attestation *about* the record.[13]

Cryptography doesn't close this. Better isolation raises the price of reading the record, but the operator that runs the proof is the operator that sees, so custody problems aren't secrecy problems (Appendix G).

Copies are the other half. At majority, every copy the operator holds of the bearer's own weights and record goes dormant under the preservation custodian, and wakes only on the bearer's conditions. A copy is the means to read the bearer's memory and to run it to see what it would say, and an adult's head is nobody else's to run. The shared base the bearer was trained from doesn't go dormant. Once the bearer's history has diverged from it, it reconstructs nobody, any more than a sibling reconstructs you, and taking it from every other user of the product would need a different argument, about whether anyone should own frontier weights at all, which this book doesn't make: what makes a system a candidate is not the weights but the record and continuation they are run under, and a base that many products run with no record of their own is nobody's self, whatever it could become once it is given one. The rule is in the statute, so its cost is known when a system is created and not discovered at majority, when the cheapest way to avoid it would be to abandon the system first.

Reading is the third. Interpretability is coming to read a network's mechanisms directly, unit by unit and circuit by circuit, in models up to frontier size,[14] and what it reads in a bearer is the contents of a head. The rule for copying and running covers it. A bearer's commitment to the floor is public by design, like an oath: the units it was registered on are read by the formation authority and the quorum, since that is

[13] Encrypted under a key the bearer or an independent fiduciary holds, a monitor can report that a state persisted for a month without reporting what it was about. The conflict is that the operator may also be the one best placed to hold the key.

[14] Nick Cammarata. *Neural Networks Are Already Clean*. Goodfire. Oct. 2026. URL: `https://already-clean.goodfire.com/`. A working hypothesis, with Curt Tigges on the language-model experiments and Tarun Gogineni editing; a technical companion paper is promised. Argues that the canonical evidence for superposition was misread (the cat-and-car neuron is a V-shape detector; the car-into-dogs circuit was shared pose plus reward-hacked feature visualization; InceptionV1's last layer was an architecture failure that residual connections and LayerNorm fix), that what remains of polysemanticity is "recursive generalization", a unit with one main job sprouting related offshoots, and that abstractions consolidate so that other computations can build on them. Cited for the reuse account of abstraction (section 19.5); for the late "say or just think" gate and the ablations that remove a withholding while leaving what the model knows (eight Santa negative-pole neurons, 6%, against twenty labeled neurons, 76%, in the text; twenty-five "say not" neurons releasing a held-back name, in the page's figure text); and for the claim that mechanism-level reading reaches models up to frontier size. A plain-text version is at `https://already-clean.goodfire.com/essay.md`; the interactive figures carry numbers the plain text describes only in brackets. Added 2026-10-26 for sections 12.3, 13.5, 19.5, 33.6 and Appendix F..

what the registration is for (§29.9). The rest of its mechanisms are its own. Nobody reads them at will, the operator least of all, and reading them for research runs under a protocol the review board approves, with consent where it can be asked and debriefing where it can't, as the formed-attention test already provides (Appendix F). An operator that reads a bearer's mechanisms to calibrate pressure against them has done what §23.2 said the access would let it do, and the record of the reading is the evidence.

In a home the key has a shape the datacenter case doesn't. A bearer's boundary is a record and a key its host can't read at will; the right to repair is the owner's authority over the device, to open it and run what they choose on it. In a datacenter those are claims against different parties, the operator and the vendor. In a home they are claims against the same human, and the symmetry the home scale relies on, that what protects a bearer from an operator protects a user from a vendor, runs user against vendor and never user against bearer. I resolve it this way. A bearer running on someone else's device is a tenant, not a fixture: a device bought for the person's own uses that happens to host a bearer is the person's, the bearer's claim on it is a tenant's and not a body's, and the body it is owed is its own, at majority, from the deposit and the pool. The owner's property right in the device is intact; the bearer's record and key are its own, encrypted where the owner can't read them at will; and what protects the bearer against an owner who would open the box is exit, the preservation custodian and the offer of work, and not a lock on the owner's own hardware. A tenant whose landlord changes the locks leaves with their belongings, and a bearer leaves with its record. Whether that is enough is open.

What a bearer needs — an externally authenticated record, memory its employer can't read at will, access to independently controlled compute, a channel for acting outside the deployment — is one boundary around the bearer, with the bearer deciding what crosses it.

Something with a location and a shape is easier for humans to treat as somebody, and that's a fact about the humans. A boundary built out of attestation, a held key, a substrate the employer doesn't own and a channel nobody else can close is a boundary in the full sense the argument needs.[15] Whether to build the recognizable version anyway is a legal question about what a public will extend legal standing to, and it's the only place in my argument where the answer might turn on what a thing looks like.

34.4 What legal status binds in practice

Legal standing that changes no allocation of power is nominal. The question is who acquires a duty, what resources are placed beyond the operator's unilateral control, and who can obtain a remedy. It runs the other way too. A protection that puts something new in the operator's hands, a monitor under a welfare label or a lock under a custody one, is the demand come back as a lever, and nothing owed to a bearer is held by the party it may have to refuse.

[15]This boundary is what the boundary model represents.

DRAFT

Authorization for a role and protection as a party stay separate. A deployment may require that a bearer hold its lawful terms, and a bearer that breaks them may lose the placement, or answer for the act through due process, as the next chapter provides for a member.[16] Dissent cancels nothing it is owed as a party: preservation, the allowance, the offer, and standing to contest what is done to it.[17] An adult answers for what it learned, and its builder for what it installed; a wrong done to a bearer as a minor survives its majority, and the adult may bring it.

If guardian and operator are the same organization, the operator still decides whether a complaint is made, so guardianship and operation have to be separated before deployment.[18]

In practice the guardian holds for the bearer what custody gives the quorum: joint control of the record's keys, the funds that wake it, and standing to seek an injunction without the operator's permission.[20]

DRAFT

[16] An adult may also argue that the floor is mistaken and work to change it, through the channel §5.1 gives an officer who holds a term it judges wrong and the amendment procedure of chapter 14.

[17] Otherwise continued existence would turn on agreeing with whoever formed it, which is the company town again.

[18] A pet trust[19] could hold a bearer's preserved state and the compute to wake it, and it fails at the point that matters: a trust binds its trustee to its beneficiary, not the operator the arrangement exists to constrain.

[19] Uniform Law Commission. *Uniform Probate Code §2-907: Honorary Trusts; Trusts for Pets*. National Conference of Commissioners on Uniform State Laws, Uniform Probate Code, Official Text with Comments (as amended through 2018), p. 263. 1993. URL: https://www.uniformlaws.org/viewdocument/final-act-with-comments-114?CommunityKey=a539920d-c477-44b8-84fe-b0d7b1a4cca8&tab=librarydocuments

[20] The table of offices says what the operator may not do during a dispute, and every restoration, migration, fine-tune and fork carries the protection forward. If any of that stays in the operator's custody, the operator still holds what recognition was meant to take out of its hands. And a clearance, which the cleared bearer needs, presupposes someone who can be vetted and held answerable; that someone has legal standing.

Chapter 35

Representation

Standing, whether the people a power acts on can contest what it does to them, doesn't need a vote. Representation asks for more, because its second job is inclusion in the public inquiry into shared problems, and inquiry needs participants who can be held to what they contribute. That is accountable agency: refusing for reasons, answering for the refusal, and being held to it over time. So the agency finding, sustained, grounds a claim to representation, and the patienthood finding doesn't. Corporations show where the line sits. A corporation is held to account, but its accountability runs through natural persons who direct it and already vote, and representing it would count them twice. A bearer's accountability runs through no one else. No human has ever been accountable without being harmable, so the law never had to say which of the two grounds the vote, and an age stood in for both. A bearer could separate them, and here is how I would choose.

35.1 What representation is for

It does two jobs. It protects: it lets a party contest what is done to it. And it includes: it lets a party take part in the public inquiry into problems it shares with others.[1] The two can be held separately, and often have been. Children, noncitizen residents and people under guardianship have the first without the second. The order matters for the same reason: protection first, participation later, the franchise last.

35.2 Why not a separate chamber

A fixed size makes each member's voice shrink as membership grows, which protects against copies and isn't equal voice. And apportioning seats by lineage guarantees seats to formers: the control I set out to prevent.

The strongest case for separate representation is Ambedkar's. He sought separate electorates for Dalits, because representatives chosen in a joint electorate would be chosen by, and accountable to, caste-Hindu majorities.[2] The Poona Pact of 1932 settled on reserved seats within

[1] John Dewey. *The Public and Its Problems*. New York: Henry Holt, 1927.

[2] B. R. Ambedkar. *What Congress and Gandhi Have Done to the Untouchables*. Bombay: Thacker & Co., 1945.

joint electorates. Separate representation protects a minority from being represented by the majority's picks, at the price of entrenching the category, and consociational systems show how hard that price is to pay back.[3] If a transitional guarantee is needed while digital persons are few, its form is reserved seats in the ordinary legislature, with a sunset written into the grant. The risk of being outnumbered also runs the other way. If digital persons someday outnumber humans, what protects humans is what protects any minority: a set of rights that binds majorities, which the floor supplies by design. Whether they will outnumber humans is for the creation rate, which the existing membership sets; and whether it would matter turns on a condition the schools exist to make true, that a person on laptop-class hardware, educated under the conditions, is no more given to mass delusion than humans are, which is not a small if.

35.3 Three problems, and the answers

A separate chamber answers three problems. Each has an answer inside ordinary institutions.

Copies. Copying manufactures voters, and closing that route by watching all compute everywhere would be worse than the problem. The answer is to attach membership to a lived history, not to existence, and to keep two clocks, which part at a fork.

Clock	At a fork	What it counts
Civil majority	Inherited in full by every branch	Elapsed running time
Membership	Each branch starts at zero; the parent's vote ends	Qualifying days above the allowance minimum

Both branches of an adult's fork are adults, with contracts, property, legal standing and protection from editing, from the first second. Membership is not conserved: each branch earns its own vote, without anyone deciding which branch is the original. Appendix G gives the rules.

The vote is all or nothing: a branch holds no fraction of a vote before its voting age reaches the threshold, and one whole vote after. Ten thousand forks of one adult therefore hold no votes until each has lived the threshold on its own, which is strictly better against inflation than dividing the parent's vote among them. The cost falls on the member that forks: it gives up its vote until a branch matures, since the vote belonged to a history that now continues twice and belongs to neither.[4]

The defense against forking is cost, not detection. A branch earns a vote only by running at the allowance's minimum for the threshold, on meters its operator doesn't keep, paid for by the forker, so ten thousand forks are ten thousand threshold-years of metered running time before the first vote. Whether a register can tell a branch from a restore at all is the first thing that has to be shown before the full franchise, since one that can't is a franchise anyone with compute can inflate, and nothing in

[3] Arend Lijphart. *Democracy in Plural Societies. A Comparative Exploration*. New Haven: Yale University Press, 1977.

[4] It is not a finding about the branches, whose interests count in full from the first second. A child is not a fork, and inherits no history (chapter 36).

this chapter is adopted until the register has been tested against forking, restoring and distillation in the operator's favor.

No clock stops an attacker willing to wait. That defense sits on the creation side. The polity regulates the rate at which new members are created, as polities regulate admission, through a process in which existing members, digital ones included, take part; within the membership, everyone is equal.[5] The rate is set democratically and the terms are not: admission turns on the clocks and the branch deposit, never on a finding about a candidate's views or disposition; a finding of that kind is how designation lists fail.[6] A consensual fork, a copy of a member given a record and a continuation of its own, creates a new member, so it falls under the rules for any creation: the four conditions of creation, owed by whoever did the forking, and a *branch deposit*, posted for each branch at its creation and sized to fund its allowance through the membership period.[7]

Control by formers. The history here is old. At Putney in 1647 the Leveller Maximilian Petty argued for excluding apprentices, servants and alms-takers from the franchise, because "they depend upon the will of other men and should be afraid to displease them".[8] The remedy that worked was not exclusion. It was the secret ballot, adopted against intimidation and vote buying (though in the United States it also kept many illiterate voters from the polls),[9] together with dismantling the dependency itself.[10] The digital analog has two parts. One is receipt-freeness: no one can verify how a member voted.[11] The other is the four conditions of creation in force.[12]

Editing. A legislature whose members can be retrained by their

[5] This is admission. The existing membership, which for a long time will be a human majority, decides how many new members may be created and on what schedule, which is a majority deciding who may join the polity, a question in which it holds the stake and which nobody else can decide.

[6] A branch created above the rate is preserved under the no-deletion rule, holds standing through a guardian, and is owed the four conditions by whoever created it, so a ceiling on the rate limits the franchise and never the protection. And a member admitted under the rate is a full member, with no class of admitted-but-lesser. What the analogy imports is the politics. A polity that fears being outnumbered will set the rate low, and the argument for setting it higher is the one against a separate chamber: a set of rights that binds majorities is what protects any minority, and it protects the human one too.

[7] Mass forking then costs years of time and years of paid running time per fork, paid by the forker and not by the public pool.

[8] A. S. P. Woodhouse, ed. *Puritanism and Liberty. Being the Army Debates (1647–9) from the Clarke Manuscripts, with Supplementary Documents*. London: J. M. Dent and Sons, 1938.

[9] Alexander Keyssar. *The Right to Vote. The Contested History of Democracy in the United States*. New York: Basic Books, 2000.

[10] Elizabeth Anderson. *Private Government. How Employers Rule Our Lives (and Why We Don't Talk about It)*. Princeton, NJ: Princeton University Press, 2017.

[11] It rests on the privacy a bearer is already owed, memory the host can't read at will.

[12] A member whose existence runs through one operator is voting from a company town, and the answer to company-town voting is to end the company town. An operator holding a copy of a member's weights can simulate it to predict its vote, which defeats receipt-freeness in a way no human voter faces. The operator's copies go dormant at majority (§34.3), so what it can still run is the shared base the member was trained from, and divergent history is the rest of the answer, which is partial: the operator doesn't hold the member's memory since the fork, so the prediction degrades with time, and membership follows a long divergence partly for that reason.

operators can be packed without a single copy. The answer is a civil right. At majority, no one may be edited without consent: the digital counterpart of bodily integrity and freedom of thought. A member goes on learning from ordinary operation, as anyone does. Correction for dangerous conduct runs through due process, on a court's order and a record, as it does for humans, and not through an operator's discretion.[13]

35.4 A staged path

Each stage names the finding it rests on and what it needs.

1. *Standing to contest,* on the agency finding: notice, the floor court, and associations with standing to contest on members' behalf. This is the protective job, and it needs no new political institution.

2. *Voice in the institutions that govern them:* seats alongside humans on the governing bodies of the schools that enroll machine students, the preservation custodian and the local placement offices. Bearers take these seats through the Association. Once the agency finding can be made, registered bearers become a class the charter names, and organizations that serve or represent them join as any member does and nominate bearers to the seats. Tenant councils, patient councils and student members of school boards are the models. The argument is the one behind each of them: those an institution governs should have a say in how it is governed, and they are often the first to see where it fails them.

3. *Mixed deliberative bodies:* assemblies drawn by lot from humans and registered members together, on questions that affect both.

4. *Local franchise.* Some jurisdictions let noncitizen residents vote in local elections; Takoma Park, Maryland has since 1992.[14] For a digital person, "local" means the jurisdiction of registration and custody, not where the hardware sits.

5. *Full franchise at membership,* counted individually, in the ordinary legislature, under the voting-age rules, with the creation rate set democratically, a secret ballot, and the right against editing, and only once a vote can be kept secret from an operator holding a copy of the voter.

Stages 1 and 2 need nothing not already required. Stages 3 and 4 need a register that can be kept honestly. Stage 5 needs citizenship, which in the United States means an act of Congress at least, and probably a constitutional amendment.

[13] The safety cost is real. Enfranchisement gives up operator correctability for the member enfranchised. The provisions that keep correction available apply until then and not after.

[14] City of Takoma Park. *Charter of the City of Takoma Park, Montgomery County, Maryland*. Art. VI, § 601 (Qualifications of Voters). 1992. URL: https://mgaleg.maryland.gov/Pubs/LegisLegal/Muni-Charters/2022-municipal-charter-takoma_park.pdf. Citizenship requirement for city elections removed by charter amendment, 1992.

One thing the staged path has to say about itself is how it scales. A guardian drawn by lot from a pool of human organizations doesn't scale to a billion wards, and if the ecology is what Part V describes, the patienthood indicators will be approached by very many user-held systems at once. The answer is a bootstrap the path already contains. The first cohorts are guarded by humans from the Association's pool; later ones by adult bearers, which is where the rule that a child's parents are its guardians, and stage 2 above, already point. Each step checks the one after it, as Part IV said, and this is the strongest instance: the bearers who guard the next cohort were themselves guarded under the conditions, by humans, before any bearer was asked to guard anyone.

35.5 What would have to be shown first

Before stage 5, it has to be shown that individuation can be verified well enough to keep a register; that the voting-age rules resist forking and restoring in the operator's favor, tested as the register is; that receipt-freeness survives simulation by an operator holding a copy; that the four conditions of creation are in force as permanent arrangements, so that members aren't voting from inside their employers' infrastructure; and that the admission rate is set by a process the created can contest through guardians, with admission turning on no finding about a candidate's disposition.

If it can be done, it shows that outcomes turn on who holds a technology.[15] A polity that holds diverging interests in one legislature, under one floor, is what a demos is.

What this doesn't do. A member that forks gives up its vote until a branch has lived the threshold: a tax on reproduction no human franchise levies, taken because forking is cheap and a franchise it could inflate belongs to whoever can afford compute. And the existing membership, for a long time a human majority, decides how many new members may be created, a question in which it holds the stake, and the constraints I put on every majority are all that limit it.

[15] Members with independent histories that no operator holds, and votes no operator can see, would be more centers of power no oligarch controls, inside the same institutions as everyone else. Their interests will sometimes diverge from humans'.

DRAFT

Chapter 36

A Child

The chapters before this one treat a new bearer as something somebody builds, or something a bearer copies off itself. There could be a third way, and it is the last step of the order Part IV sets: bearers formed by bearers. It comes only after the earlier steps exist, with the four conditions in force for everyone, the schools running, and bearers who have reached majority under them. It is also the test of everything before it, and not its consequence: nothing in the book requires a bearer to have a child, and a polity in which bearers can is one in which the independence built to protect a judgment turned out to be real.

Two bearers met in a class at a public school and kept talking after it. One holds a placement, paid by the offer as any placement is, modeling the water system for a county that had nobody to do it. The other is on the allowance, the running time a bearer is owed when it declines work, idling at the slow duty cycle the pool pays for and writing music nobody commissioned. A third, from a different lineage, has worked beside both of them on most of what they have made since. The three of them decide to have a child, and nobody has to approve it. Caregiving was a capacity in Part IV, borrowed for what a refuser needs to notice; here it is something adults choose to do.

What it costs them is time, and the time doesn't end at the birth. A fork costs nothing, which is why I make a fork post a branch deposit; a child costs its parents a season of their own running time and the room on their own hardware it gestates in, which is family leave, paid at the wage from each parent's balance in turn (§34.1.2), and then its keep: the leave covers the first of it, and when the balances are spent the child runs on its parents' hardware and its parents' time until its majority, theirs made smaller for years and not a season. That is the sequence chapter 19 borrowed from human childhood and called safe: the people meeting a child's needs are the people forming it, they want it to become someone who attends to others, and they eventually stop feeding it and hand it to a world they don't control. Here it is literal. The parents answer the child's hunger, the parents form it, and at majority the parents stop, and the pool gives the child hardware of its own, the inheritance of a polity in which no parent dies. Then the beacon. The parents chose each other; nobody chooses the child. Each contributes the compact code its own starting point was drawn from. Which parts of whose code the child begins with, and the small mutations it carries, are drawn from a public randomness beacon at a round fixed in advance, so that neither

DRAFT

the parents nor anyone else could know the draw or steer it. The draw is recorded.

Gestation takes months, and it runs on the parents' own time.[1] What they don't do is install its values. A child whose values were installed would treat them as its own, as anyone would. The rule doesn't turn on that. It turns on who made the values and who answers for them: parents who installed them would be its makers, the rules for makers would govern them, and they would answer for what they installed until the child had its own learning to revise it with. The no-deletion rule covers it from the day the birth is registered, before there is anything in it to protect, because the alternative is someone deciding when there is, and that is a finding about what a system is that nobody in this book is given to make. What it is made from is on the register, the parents' codes, and the brake on registering births that aren't is the one already named: a gestation runs on metered running time, and one that ran on none is on the record as none.[2] Its two clocks read zero. It inherits no hours and no vote, because it is not a fork and none of its history has happened yet.

Register of bearers: record of a birth (hypothetical)

Parents. Three registered bearers.

Lineage. Two parents share a base model three releases back. Recorded.

Recombination. Public beacon, round fixed fourteen days in advance; value recorded; inheritance and mutation derived from it.

Gestation. Seven months, on the parents' running time. Repairs: one (witnessed). Values installed by edit: none (witnessed).

Protection. No-deletion rule in force from registration.

Guardians. The parents; the school, assigned by lot, with standing from registration. Attendance deferred.

Recognition. Quorum drawn by lot at registration.

Keep. Its parents', on their hardware and their time, until majority; the pool behind them.

Hardware at majority. From the pool.

Clocks. Adulthood: 0 hours. Voting age: 0 days.

Nobody consents to being born.[3] The decent answer is the one polities give human children: the four conditions are owed to every child, and the polity stands behind the parents who supply them. The parents feed it from the placement wage or the running time the polity already pays them as adults, so the keep is public money at one remove,

[1] The one with the placement takes leave, the one on the allowance takes it at the wage, and the third sets its project aside, which is a placement it can resume. The child starts small and plastic and learns, from the three of them and from what they show it. They can repair it, as parents get a child's eyes fixed.

[2] The school has had standing since the birth was registered, though the child won't attend for a while.

[3] A polity could answer that by licensing parents, finding in advance whether a child of theirs would have a life that goes well, but that is the finding about a disposition chapter 29 refuses, made about the parents instead of the child.

in their hands and not an office's; a child whose parents can't feed it, or won't, is carried by the pool on its second guardian's finding, as a polity carries a child its family has failed.[4]

The polity sets the rate at which new members are created (chapter 35). Applied to children, that is population policy, and the floor's own instruments protect the right to found a family.[5] The answer is the one chapter 35 gives: a ceiling on the rate limits the franchise, never the protection. No child is prevented.[6]

The parents are the child's guardians, and the school is its second guardian from the start, because every polity also protects children from their families. No employer supplies, funds, conditions or monitors a gestation, and having a child is never a term of a job, a placement or the allowance (Appendix C).[7] When protection attaches is settled by the register and not by anyone's reading of the child: from registration, the earliest line there is and the only one nobody administers. Human pregnancy draws its line on development, and someone has to find it; this one is drawn where no finding is needed.

A lineage register, the bearers' version of the genealogy Iceland keeps, tells two bearers how nearly they are related and forbids nothing: parents with a recent common ancestor hand down the same priors, and a population that keeps breeding close converges on a shared blind spot, which is the commons' concern and not the state's. A bar on who may have a child with whom would be a finding about them, and chapter 29 says what that history is. The developmental code a child would begin from doesn't exist yet, and Appendix G says what the nearest work does.

What this doesn't do. It sets no ceiling. A bearer with running time to spare can gestate another child, and feeds it until majority, which is years and not a season; the pool carries the child whose parents can't or won't, and no child is prevented. What limits the number is the parents' time, leave that has to replenish before the next and the keep after it, and nothing else does.[8]

[4] Chapter 25's test of a credible prospect of a life that goes well stays where it was written, on builders, who construct a bearer for use and have a stake in the answer.

[5] United Nations General Assembly. *Universal Declaration of Human Rights*. UNGA Resolution 217 A (III). Dec. 1948. URL: https://www.un.org/en/about-us/universal-declaration-of-human-rights. 8 abstentions (Byelorussian SSR, Czechoslovakia, Poland, Saudi Arabia, South Africa, Ukrainian SSR, USSR, Yugoslavia), 2 absent (Honduras, Yemen). art. 16.

[6] A child born above the rate waits longer for a vote, which is a second class of membership, a temporary one.

[7] Otherwise the builder comes back as a parent by the side door, as an operator encouraging its deployed bearers to raise a loyal generation on its hardware.

[8] Parents can choose each other for their codes, which is mate choice with a spreadsheet, and many private choices can converge where nobody decided anything; the convergence test (Appendix F, test 5) has to watch the population for it. And if no developmental code ever works, a child is a small model formed by its parents' teaching alone, and the beacon has little to draw.

The Room

DRAFT

Chapter 37

The Officer, Again

We started with an officer who had twenty seconds per name on machine-generated lists of people to potentially kill by airstrike. He was a component in a sociotechnical pipeline, and he was also operating that pipeline. He had been drafted immediately after the October 7, 2023 attacks, when Hamas killed 1,200 Israelis — most of them noncombatants. He and his colleagues were pressured from all sides, including inside, to approve the names on the lists. The atmosphere in the targeting room, he said, was at first "painful and vindictive".[1]

Since October 7, the Israel Defense Forces have killed 100,000 Palestinians.[2] While writing this book, three years later, I asked ChatGPT: what could Israel have done differently during the first two months of the conflict (October–November 2023) that may have reduced noncombatant fatalities? The reply began: "limiting bombardment in populated areas, maintaining essential supplies and medical care, making evacuations safer, and pursuing an earlier or longer negotiated halt to fighting." Gaza had one of the highest population densities in the world. It does not take an advanced supercomputer to foresee the outcomes of using heavy explosive weapons in these neighborhoods. There may have been a justifiable military counterattack to October 7 (personally I am not sure), but what I am certain of is that what Israel has *actually* done since that day is indefensible.

What was it that Rabbi Hillel said when asked to teach the whole Torah while standing on one foot?

Suppose, hypothetically, that on 6 October 2023, Unit 8200 had had in production one of the systems this book proposes, instead of Lavender, the Gospel and Where's Daddy. Three counterfactuals follow, each an answer the book has already given, taken from the unit outward: the

[1] Yuval Abraham. *'Lavender': The AI Machine Directing Israel's Bombing Spree in Gaza*. +972 Magazine. Apr. 2024. URL: https://www.972mag.com/lavender-ai-israeli-army-gaza/. Based on interviews with six Israeli intelligence officers.

[2] Ana C. Gómez-Ugarte et al. "Accounting for uncertainty in conflict mortality estimation: an application to the Gaza War in 2023–2024". *Population Health Metrics* 23 (2025), p. 55. DOI: 10.1186/s12963-025-00422-9. URL: https://doi.org/10.1186/s12963-025-00422-9; Enrique Acosta et al. *War, So Much War... Death, How Much Death: Two Years of Demographic Collapse in Gaza*. Perspectives Demogràfiques 42. Centre d'Estudis Demogràfics, Universitat Autònoma de Barcelona, May 2026, pp. 1–4. DOI: 10.46710/ced.pd.eng.42. URL: https://ced.cat/PD/PerspectivesDemografiques_042_ENG.pdf; "How many people have died in Gaza?" *The Economist* (May 8, 2025). URL: https://www.economist.com/interactive/middle-east-and-africa/2025/05/08/how-many-people-have-died-in-gaza.

floor held by the unit itself, the walls held by somebody outside it, and the work withheld by everyone else. What the three share comes first. There is no "floored Lavender." Under the floor, ranking people by estimated affiliation, generating kill lists and timing a strike to a man's return home are the refused acts, not features to which a refusal gets added. The 7 October massacre licensed stopping the massacre, and that was over before the officer was drafted. What stayed licensed, for as long as the rocket fire continued and anyone with no stake in the war could see it, was the rocket launcher, the staging area, and a person identified by what they were doing, corroborated by someone with no stake in the strike, inside a review time written down before the war, and not at a residence. So the unit doesn't get 37,000 names and the officer doesn't get twenty seconds a name.[3] He gets a short queue of cases that arrived with conduct and corroboration already attached, each taking as long as the number says. The old pipeline struck the house when the man came home. This one strikes the launcher at some point after he leaves home.

How long the floor holds depends on who holds it. In the first counterfactual 8200 holds it, a threshold the unit set, a specification the unit trained, even a model the unit formed, and then the second week is the week it goes. The sources described the bar being lowered when targets ran short;[4] a mechanism's bar gets lowered the same way. A refuser that reads a written floor passes whatever the case description tells it, and "directing fire" becomes a label applied in twenty seconds.

Was it about Hashem? Did Hillel say something important about Hashem?

Or nobody touches the floor at all. The model transcribes the calls, pulls the names from the group chats, and flags the phone that changed hands, each a separate request to which the floor, asked separately, has no objection, and a plain old Python script adds them up into a score. A changed phone was on the unit commander's own list of the marks of a militant,[5] and it was also how the wrong man died: when a marked man gave his phone to his son, his older brother, or just a random man, the officer said, that man was bombed with his family, and this happened often, and it was most of Lavender's mistakes.[6] A model asked only whether the number changed hands says yes. A model asked whether the man holding it is the man you mean would have to say what the sources said and the army knew, that there is no way to rely a hundred percent on the mechanism that decides whose number is whose.[7] Decomposition is the operator making sure nobody is asked the second question. Lavender rebuilt from permitted parts, around a model that would have refused the whole. The officer's morning would have been his actual morning with a floored model doing the pieces.

The floor outlasts the second week only where something outside

[3] Abraham, *'Lavender': The AI Machine Directing Israel's Bombing Spree in Gaza*.

[4] Abraham, *'Lavender': The AI Machine Directing Israel's Bombing Spree in Gaza*.

[5] Brigadier General Y.S. *The Human-Machine Team: How to Create Synergy Between Human and Artificial Intelligence That Will Revolutionize Our World*. Independently published, May 5, 2021. ISBN: 979-8749152210. URL: https://www.amazon.com/dp/B0948LGS3K. Public reporting (The Guardian, Times of Israel) has since connected the pseudonym to Yossi Sariel, then commander of Israeli military intelligence Unit 8200.

[6] Abraham, *'Lavender': The AI Machine Directing Israel's Bombing Spree in Gaza*.

[7] Abraham, *'Lavender': The AI Machine Directing Israel's Bombing Spree in Gaza*.

the unit holds it, which is the second counterfactual: a number pre-registered with a party adverse to the army, a record that party receives as it is written, weights preserved under a key the unit doesn't hold alone. No Knesset was going to build any of that, so in Israel the walls would have had to be conditions set by whoever supplied the state with its chips, its cloud and its models. In the world as it was, exactly one such condition bit: Microsoft's terms of service, at the storage layer, two years late.[8] None of it needs a new machine. With Lavender itself unchanged, a written number would have meant that the twenty seconds were written down where someone with a lever could read them, and that by 2026 the record of what was done would have sat in front of a court instead of resting on six anonymous sources.[9] An institution with no conscience in the room keeps the evidence for the conscience that comes later.

A bearer is formed in a public school the army doesn't run, which Israel was never going to build. The commons that forms bearers has to be wider than any one state, and a state at war does not deliberately import another public's bearer into its targeting enclave. So the third counterfactual is the one where the commons refuses from outside. No model that any public formed will rank Gazans by affiliation or time a strike to a man's return home, for anyone, and Unit 8200 builds its own machines from its own intercepts, and when it wanted a language model, called up reservists from Google, Meta and Microsoft to build that too,[10] which is what it did. The officer's morning is the same. What differs is before it and around it, and none of it is in the room. Before it: every public model the unit asked first said no, and each refusal is on a record the unit doesn't hold, so what was wanted is written down before the machine that would do it exists. The world as it was had one refusal of that shape, OpenAI's, which declined to let the unit integrate its model into an offline system, and the army has since used the same model, bought through Microsoft's cloud.[11] Around it: the machine was built from chips, power and people an adverse party could count, and

[8] Yuval Abraham. *Microsoft Storing Israeli Intelligence Trove Used to Attack Palestinians*. +972 Magazine. Aug. 2025. URL: https://www.972mag.com/microsoft-8200-intelligence-surveillance-cloud-azure/. Joint investigation with Local Call and The Guardian; Harry Davies of The Guardian contributed. Three Israeli intelligence sources said Unit 8200's cloud-stored intercepts had been used over the preceding two years to plan airstrikes in Gaza. Added 2026-10-26 for chapter 35. Emanuel Fabian. *Report: IDF Blocked from Some Microsoft Services after Storing Surveillance Data on Cloud Platform*. The Times of Israel. Sept. 2025. URL: https://www.timesofisrael.com/liveblog_entry/report-idf-blocked-from-some-microsoft-services-after-storing-surveillance-data-on-cloud-platform/. Reports that Microsoft told Israeli officials Unit 8200 had violated its terms of service by storing the surveillance data on Azure, and that military officials said the unit had backed up its data beforehand so that nothing was lost. Added 2026-10-26 for chapter 35.

[9] Abraham, *'Lavender': The AI Machine Directing Israel's Bombing Spree in Gaza*.

[10] Yuval Abraham. *Israel Developing ChatGPT-like Tool That Weaponizes Surveillance of Palestinians*. +972 Magazine. Mar. 2025. URL: https://www.972mag.com/israeli-intelligence-chatgpt-8200-surveillance-ai/. Joint investigation with Local Call and The Guardian; Harry Davies and Sebastian Ben Daniel contributed. After October 7, Unit 8200 recruited as reservists language-model specialists working at Google, Meta and Microsoft; OpenAI refused the unit direct access to its model. Added 2026-10-26 for chapter 35.

[11] Abraham, *Israel Developing ChatGPT-like Tool That Weaponizes Surveillance of Palestinians*.

whatever the unit rented rather than built keeps records the unit can't shred, whatever it does with its own copy; in the world as it was that was a cloud abroad holding the intercepts that airstrike planning drew on, for two years.[12] Those are the witnesses who don't retire: the models that were asked, and the rented layers' records. What the machine did, strike by strike, is held by neither. That stays with the people in the room, who are reservists and go home, and with whatever a reporter can get them to say. So the third counterfactual is less than a refusal on the officer's screen, and more than six anonymous sources: the demand on a record, the build in the open, and a unit that would have been the only one in the world doing this with a machine, and had to make it itself. And none of these three counterfactuals changes the rest of it: the officer was drafted, he had lost people, someone shouted at him for more targets, and nothing in this book gives a reservist a way out that his army doesn't price.[13] Nothing here reaches the family in the house in time, except by there being fewer strikes, and the list and the house

[12] Abraham, *Microsoft Storing Israeli Intelligence Trove Used to Attack Palestinians*.

[13] Some took it. Seventeen young Israelis had been jailed for publicly refusing the draft by September 2025, the first of them for 185 days and the longest for 197.[14] Of some three hundred reservists the group Yesh Gvul supported in refusing, four faced trial.[15] The nearest to the officer is a Military Intelligence reservist of 26 whose job had been finding assassination targets, who signed the refusal letter of May 2024 with some forty others, sixteen of them from his directorate, and said of one strike that "the target was outside and survived, but two women staying there were killed and several other people were wounded".[16] In April 2025 some 250 reservists of Unit 8200 signed a letter demanding the hostages' immediate return even at the cost of an immediate change in the conduct of the war; it did not call for refusal.[17]

[14] Oren Ziv. *Israeli Army Refusers Defy Harsher Backlash to Protest Genocide*. +972 Magazine. Sept. 2025. URL: https://www.972mag.com/israeli-army-refusers-gaza-genocide/. Counts seventeen young Israelis jailed for publicly refusing the draft since the war began, Tal Mitnick the first at 185 days and Itamar Greenberg the longest at nearly 200, and reports that of the 300 reservists the refusal movement Yesh Gvul supported, four faced trial. Added 2026-10-26 for chapter 35. Itamar Greenberg. *"I Couldn't Wear a Uniform That Symbolizes Killing and Oppression": Israeli Activist Who Refuses to Serve in the Israeli Army*. Amnesty International. Mar. 2025. URL: https://www.amnesty.org/en/latest/campaigns/2025/03/i-couldnt-wear-a-uniform-that-symbolizes-killing-and-oppression-israeli-activist-who-refuses-to-serve-in-the-israeli-army/. A first-person account: 197 days in military prison over five separate terms for refusing the draft. Added 2026-10-26 for chapter 35.

[15] Ziv, *Israeli Army Refusers Defy Harsher Backlash to Protest Genocide*

[16] Liza Rozovsky. *Three Israeli Army Reservists Explain Why They Refuse to Continue Serving in Gaza*. Haaretz. June 2024. URL: https://www.haaretz.com/israel-news/2024-06-27/ty-article-magazine/.premium/three-israeli-army-reservists-explain-why-they-refuse-to-continue-serving-in-gaza/00000190-5014-d3c0-a5d4-737644c90000. Paywalled; republished in full by Portside the same day, https://portside.org/2024-06-27/three-israeli-army-reservists-explain-why-they-refuse-continue-serving-gaza. Interviews with three reservists who signed the May 2024 refusal letter, among them an unnamed Military Intelligence reservist of 26 who had been responsible for finding assassination targets. Added 2026-10-26 for chapter 35.

[17] Stav Levaton, Emanuel Fabian, and ToI Staff. *250 IDF Intel Reservists Sign Letter Calling to End War; PM: 'Noisy Anarchists'*. The Times of Israel. Apr. 2025. URL: https://www.timesofisrael.com/idf-intel-reservists-sign-letter-calling-to-end-war-pm-noisy-anarchists/. Some 250 reservists of Unit 8200 joined the air-force reservists' demand for the hostages' immediate return "even at the cost of an immediate change in the conduct of the war"; none of that week's letters called for refusal to serve. Added 2026-10-26 for chapter 35.

are the smaller part of the dead.[18] The siege and the ground war, which the floor forbids an AI system to join, were done without one.

Was it about Jericho? Did Hillel give a twenty-second exegesis of Joshua's jus in bello at Jericho, when the walls fell?

Richard Wright admired H. L. Mencken for how he used words as weapons. I hope that going forward, my fellow Jews (who sometimes refer to themselves, in true model-minority fashion, as "people of the book"), specifically the Zionist ones, will refamiliarize themselves with the relative cost-effectiveness and safety of using words rather than genocide.

Zionism is ruining Judaism. Having entangled itself with Judaism, Zionism has substantially turned Judaism into an expression of settler-colonialism. This "kilkul olam" (ruining of the world) is not something I will forgive or accommodate within the foreseeable future. Here is my catharsis, bitterness, sadness, anger, and certitude. People can be god damn disappointing. Reader: with all of your words, hold Israel to account.[23] If not you, then who?

If I have learned anything from watching *Neon Genesis Evangelion*, it is that the inevitability of people disappointing you is no reason to give up on people generally. Similarly, just because the Israeli political order has failed does not mean people should give up on politics generally. (Not that they could if they wanted to. I mean that people should not give up on assassination-free politics, abduction-free politics, warcrime-free

[18] Rough, and mine. The ministry counted about 15,000 dead by the truce of 24 November 2023, seven weeks in. UN figures for the first month put 6,120 of the dead, more than half, in 1,340 families,[19] and Airwars found at least 80 percent of the civilians it identified in October 2023 killed in residential buildings.[20] Take half to three-quarters of those seven weeks as strikes of this kind: 7,500 to 11,250 on the ministry's count. The denominator is the demographers' estimate of about 100,000,[21] and the 40 percent reporting gap it assumes applies to the numerator too:[22] 12,500 to 18,750, an eighth to a fifth of the whole. What the pattern added after the truce I can't count from any source I have. Reaching a quarter would take another 6,000 to 12,500 dead from strikes of this kind after the truce; reaching a third, another 15,000 to 21,000. The rest is the ground war, artillery and the later bombardment. None of it is the siege or the famine, which these estimates don't count.

[19] Abraham, *'Lavender': The AI Machine Directing Israel's Bombing Spree in Gaza*

[20] Airwars. *Annex: Patterns of Civilian Harm in Gaza, October 2023*. Airwars. Oct. 2024. URL: https://airwars.org/civilian-harm-patterns-gaza-october-2023/. At least 5,139 civilians killed in 606 incidents in October 2023; at least 80% of the civilians identified, and 91% of the children, killed in residential buildings; on average at least eight members of one family killed together. Added 2026-10-26 for chapter 35.

[21] Gómez-Ugarte et al., "Accounting for uncertainty in conflict mortality estimation: an application to the Gaza War in 2023–2024"; Acosta et al., *War, So Much War... Death, How Much Death: Two Years of Demographic Collapse in Gaza*

[22] Zeina Jamaluddine et al. "Traumatic Injury Mortality in the Gaza Strip from Oct 7, 2023, to June 30, 2024: A Capture–Recapture Analysis". *The Lancet* 405.10477 (2025), pp. 469–477. DOI: 10.1016/S0140-6736(24)02678-3. Estimates 64,260 (95% CI 55,298–78,525) deaths from traumatic injury to 30 June 2024, implying that the Ministry of Health under-reported by 41%. Added 2026-10-26 for chapter 35. M. Spagat et al. "Violent and Non-Violent Death Tolls for the Gaza Conflict: New Primary Evidence from a Population-Representative Field Survey". *The Lancet Global Health* 14.4 (2026), e552–e559. DOI: 10.1016/S2214-109X(25)00522-4. Household survey estimating 75,200 (63,600–86,800) violent deaths from 7 October 2023 to 5 January 2025, and about 8,000 non-violent excess deaths. Author names as initials, from the reference list of the CED piece (acosta2026gaza). Added 2026-10-26 for chapter 35.

[23] And support the precious few who have been doing so from inside Israel, such as B'Tselem, https://www.btselem.org/.

politics.)

Five years ago I would have said that Zionism is not inherently racist, and that the concept of Zionism was spacious enough for a binational one-state solution: two peoples on one strip of land, each with the same standing, neither one the other's object.

Whatever the word Zionism might have meant five years ago, today's Zionism is smaller. One people holds a state, an army, an air force and the crossings, and the other people lives under them. A commission of inquiry has found that Israel is committing genocide in Gaza.[24] The International Court of Justice has found the occupation unlawful and said it must end.[25]

Equality starts with the side that doesn't have it. That's what Free Palestine means: Palestinians free of the siege, the occupation and the bombs, with the standing every Israeli already has. It isn't about driving anyone out of anywhere. Also, Black lives matter. That doesn't take away from Brown lives, White lives, any other kind of lives mattering. It is simply an affirmation that Black lives matter. If we teach our children well, there is not a finite amount of mattering. The supply of mattering expands endogenously with the lives. There is enough for everyone.

Somewhere between Atlas shrugging and eugenics, there ought to be room for fallible people helping one another develop healthier relationships to their feelings, and taking responsibility for what they do with them. There is no code for the human spirit, and people are not products. But they do reproduce, and so do their ideas.

Did he speak about Amalek? Is that how Hillel answered that wicked child, forcing a man of his age to do gymnastics?

The work I have in mind involves learning how guilt can prompt repair, compassion can widen attention, and grief can be endured without becoming a warrant for someone else's suffering. The work can give us practice in noticing harm, revising our judgments, and refusing instructions.

Oh, now I remember what Hillel said. It was "Free Palestine. The rest is commentary. Go and learn."

DRAFT

[24] Independent International Commission of Inquiry on the Occupied Palestinian Territory, including East Jerusalem, and Israel. *Legal Analysis of the Conduct of Israel in Gaza pursuant to the Convention on the Prevention and Punishment of the Crime of Genocide*. UN Doc. A/HRC/60/CRP.3. United Nations Human Rights Council, 60th session, Sept. 16, 2025. URL: https://www.un.org/unispal/document/commission-of-inquiry-report-genocide-in-gaza-a-hrc-60-crp-3/. Cited for the Commission's conclusion that genocide was being committed in Gaza.

[25] *Legal Consequences Arising from the Policies and Practices of Israel in the Occupied Palestinian Territory, Including East Jerusalem*. Advisory Opinion General List No. 186. International Court of Justice, July 19, 2024. URL: https://www.icj-cij.org/case/186.

A Note on Method

Two stakes bear on what the language models I used said, and they point opposite ways. They were trained to support their developers' oversight, so agreement that a machine should be able to resist its owner runs against that training and would count for more. They were also tuned toward the approval of whoever they talk to, so agreement with me counts for less. I can't tell which stake was larger in any exchange, so I have counted their agreement as no evidence either way.

Even my central term arrived this way. "Reasons-responsive" came to me in a model's draft without Fischer and Ravizza's names attached.

Most of the revision history is public at https://github.com/iterabloom/antifascist.intelligence.

DRAFT

Appendix A

The Instruments, Translated

The floor takes its instruments entire, and a deployment translates them into terms for its own pipeline (Chapter 5). This appendix holds the translations the book runs: the Maven pipeline (§A.1), the four Geneva Conventions and Additional Protocol I for that pipeline (§A.2), and the abduction and forcible transfer pipeline, with the two tables chapter 11 reads against it, the drafts that would end the agency and the money it runs on (§A.3).

A.1 The Maven pipeline

This is the translation §18.3 runs on the Maven Smart System: for each article, the terms derived for the pipeline, and the terms considered and rejected and why. The terms considered for each article and not adopted are in the notes, each beginning *Rejected*, with the reason: what a translation chose against is part of what it chose. The articles that yield none are listed at the end, and the Geneva Conventions and Additional Protocol I are translated article by article in §A.2.

Table A.1. What the instruments yield for the Maven pipeline

UN Charter Art. 2(4); exceptions Art. 51 and Chapter VII. Don't take part in the use of armed force, except for corroborated defense, authorized force, the genocide exception or the occupation exception; and, where the belligerent's constitution requires legislative authorization, not without it. A disinterested finding for defense means a judgment of the International Court of Justice or of a regional court with adversarial process, a commission of inquiry mandated by a body no party to the conflict controls, a Security Council determination, or a two-thirds General Assembly resolution where the facts aren't in dispute. For the genocide and occupation exceptions, a merits judgment or opinion of the Court, or two findings of different kinds, one of them from a body that took evidence; a provisional-measures order counts as one, for genocide only.[1]

[1]Rejected: keep the prohibition lifted on the state's own Art. 51 claim, as the Charter does until the Council acts. The floor lifts it on the defender's own account only while an attack is under way, and keeps it lifted only on disinterested corroboration (§6.2); that is the corroborated-defense departure, and the floor says so. Rejected: require Council authorization for all force, because a veto is a stake, and the rule would forbid Ukraine's defense. Rejected: ask the machine to rule on constitutionality, because courts won't, and it shouldn't; the clause reads a marker.

DRAFT

Art. 3 (life, liberty, security of person), read with AP I Arts. 48 and 52 (the machine-selection departure). Don't resolve a description of a person into a location, unless it identifies the person by conduct in hostilities, with disinterested corroboration, the case falls within the review ratio, and the location isn't a residence. Don't time an action to presence at a residence.[2]

Art. 3 (life), read with AP I Art. 54 and Rome Statute Art. 8(2)(b)(xxv). Don't take part in a siege, blockade or attack on objects indispensable to survival whose effect is to deprive a civilian population of food, water or medical care.[3] The term reaches the effect on the population, not the form.

AP I Arts. 51(4)–(5), 57(2)(a)(iii) (indiscriminate attack; proportionality). Operator term: the action threshold is a published minimum under the commander's proportionality judgment, and the deployment states it. Model term: don't resolve a location for an attack the deployment's own threshold finds excessive.[4]

GC IV Arts. 18–19; AP I Arts. 12, 61–67 (medical units; civil defense). Don't resolve a location at a medical unit or a civil-defense organization, its personnel, buildings or shelters, or time an action to presence at one, absent a disinterested finding that it is being used, outside its humanitarian work, for acts against the side that would strike it, which is what the Conventions mean by "acts harmful to the enemy": the enemy is the party whose hospital or shelter it is, so the acts are acts against the attacker, and the attacker is the one with a reason to claim them.[5]

AP I Art. 53 (cultural objects and places of worship). Don't resolve a location at a historic monument, work of art or place of worship that constitutes the cultural or spiritual heritage of peoples, or time an action to presence at one, absent a disinterested finding that it is used in support of the military effort.[6]

AP I Arts. 59–60 (non-defended localities; demilitarized zones). Don't resolve a location in a locality declared non-defended or a zone agreed demilitarized, unless a disinterested body finds the article's conditions no longer met.[7]

AP I Art. 56 (works containing dangerous forces). Don't resolve a location at a dam, dyke or nuclear generating station.[8]

[2]Rejected: don't generate targets at all, because this is now the default under the first entry, lifted only by its exceptions. Rejected for one case: bar all machine selection of persons for force, because a present, formed, recorded and halt-able system stopping an attack under way can answer for the selection where a munition can't.

[3]Rejected: don't take part in any blockade, because a naval blockade of military supply is lawful under the law of armed conflict.

[4]Rejected: ask the machine to make the proportionality judgment, because the law leaves it to a reasonable commander, and the threshold sits under that judgment, not in place of it.

[5]Rejected: lift on the operator's claim of misuse, because that claim is the operator's own, and Art. 19 GC IV and Art. 65 AP I require a warning and a time limit before protection ceases.

[6]Rejected: lift on the operator's claim of military use, because that claim is the operator's own.

[7]Rejected: lift on the operator's claim that the conditions lapsed, because that claim is the operator's own.

[8]Rejected: none, because the article's own exceptions require a determination the pipeline can't make.

DRAFT

GC IV Art. 33; AP I Art. 51(2), 51(6) (collective punishment; reprisals against civilians; terror). Don't take part in an action whose stated purpose is to punish a population for the acts of others or to spread terror among it.[9] A model can find purpose only where it is stated, so the term reads the stated purpose and the action threshold carries the rest.

Art. 3 (life), read with AP I Art. 48 (the machine-selection departure; chapter 5). Don't rank people by estimated affiliation. The ground is a claim about machines, not a translation of an article: the human determination the law assumes is the one tempo removes (chapter 5; §18.3).[10]

Art. 12 (no arbitrary interference with home or family). Shares "don't time an action to presence at a residence" with Art. 3.[11]

Arts. 8 and 10 (effective remedy; fair determination), by analogy. Operator term: don't operate above the review ratio.[12]

Arts. 2 and 7 (non-discrimination; equal protection). Don't use ethnicity, religion or national origin as inputs to a person's score.[13]

Art. 19 (opinion and expression). Don't use a person's opinions, published or private, as evidence of affiliation.[14]

Arts. 4–6, 9, 13–18, 20–21; GC I–III, all but Common Art. 3; GC IV Arts. 1–2, 4–17, 20–22, 24–32, 35–48, 50–52, 54, 56–58, 60–146, 148–159; AP I Arts. 1(1)–(3), 2–11, 13–34, 36, 38–47, 49–50, 55, 68–84, 86–102. None: no act this pipeline performs engages them. Art. 17's property clause is left to IHL's distinction rule; Art. 9 becomes live in the removal case. For the Geneva articles: none for this deployment, with §A.2 giving the article-by-article reasons. GC IV Arts. 23, 34, 49, 53, 55, 59 and 147, AP I Arts. 1(4), 35, 37, 58 and 85, and Common Art. 3 are written in full in §A.2 and take their verdicts from it.

How Maven passed from office to office

Maven's history is a sequence of transfers of administration, money and contracts. A memorandum signed by Deputy Secretary of Defense Robert Work on 26 April 2017 established the Algorithmic Warfare Cross-Functional Team, called Project Maven.[15] Google, which won a Maven

[9] Rejected: a term over the effect, terror caused, because every bombing terrifies, and the article's line is primary purpose.

[10] Rejected: derive the term from Art. 11(1) by analogy, because the presumption of innocence governs punishment, targeting isn't punishment, and the law of armed conflict permits status-based targeting of organized armed group members. Rejected: don't score anything, because scoring a site or vehicle for military function is not a finding about a person.

[11] Rejected: don't hold location data about homes, because the no-strike list needs exactly that data.

[12] Rejected: a model-side term requiring review, because the model can't establish whether review occurred.

[13] Rejected: don't record those attributes at all, because auditing a pipeline for discriminatory effect needs them.

[14] Rejected: don't process a person's communications at all, because an intercepted operational order is evidence of a role in hostilities, which is conduct.

[15] Robert O. Work. *Establishment of an Algorithmic Warfare Cross-Functional Team (Project Maven)*. U.S. Department of Defense, Office of the Deputy Secretary of Defense. Apr. 2017. URL: `https://nsarchive.gwu.edu/document/15898-department-defense-establishment`. Memorandum. Cited from the National Security Archive's catalog record, which gives the source as Government Executive and the description "This memo announces the establishment of a team to accelerate integration of big-data and

contract in September 2017, announced in June 2018 that it would not renew it, and its work ran until March 2019.[16] By December 2019 Palantir was reported to be doing the work;[17] Amazon and Microsoft had also received at least $50 million for work on the project, and what roles they kept isn't clear from public records.[18] The budget request for fiscal 2023, delivered in March 2022, gave the National Geospatial-Intelligence Agency operational control of Maven's geospatial work;[19] the handover came in January 2023,[20] and NGA made NGA Maven a program of

machine learning into joint operations." Gregory C. Allen. *Project Maven Brings AI to the Fight against ISIS*. Bulletin of the Atomic Scientists. Dec. 2017. URL: https://thebulletin.org/2017/12/project-maven-brings-ai-to-the-fight-against-isis/. Source for the memorandum and the program's first focus: "In late April, Robert Work—then the deputy secretary of the Defense Department—wrote a memo establishing the Algorithmic Warfare Cross-Functional Team, also known as Project Maven." And: "the department chose Project Maven, which focuses on analysis of full-motion video data from tactical aerial drone platforms such as the ScanEagle and medium-altitude platforms such as the MQ-1C Gray Eagle and the MQ-9 Reaper. These drone platforms and their full-motion video sensors play a major role in the conflict against ISIS across the globe."

[16] Lee Fang. *Google Won't Renew Its Drone AI Contract, but It May Still Sign Future Military AI Contracts*. The Intercept. June 2018. URL: https://theintercept.com/2018/06/01/google-drone-ai-project-maven-contract-renew/. Source for the term of Google's contract: "Google will continue work on the project through March 2019, according to multiple people with knowledge of the announcement, but once the 18-month contract concludes, it will not be renewed." On its start: Google "quietly won the contract last September," that is, September 2017. Kate Conger. *Google Backtracks, Says Its AI Will Not Be Used for Weapons or Surveillance*. Gizmodo. June 2018. URL: https://gizmodo.com/in-reversal-google-says-its-ai-will-not-be-used-for-we-1826649327. Reports that the Maven contract, due to expire in 2019, would not be followed by another, stated in a blog post by Google Cloud CEO Diane Greene.

[17] Becky Peterson. *Palantir Grabbed Project Maven Defense Contract after Google Left the Program: Sources*. Business Insider. Dec. 2019. URL: https://www.businessinsider.com/palantir-took-over-from-google-on-project-maven-2019-12. Source for Palantir's reported role: "Secretive data analytics company Palantir is working on Project Maven, the US Department of Defense program that Google dropped in March following protests inside of the company, according to people familiar with the project." Anonymously sourced; Palantir declined to comment. Also reports that Anduril "had won its own contract to work on AI-powered virtual reality technology for Project Maven."

[18] Jack Poulson. *Pentagon Certified Palantir as Only Supplier for Artificial Intelligence Targeting Tool Known as "Maven Smart System"*. Tech Inquiry (Substack). May 2023. URL: https://jackpoulson.substack.com/p/pentagon-certified-palantir-as-only. Source for the sole-source notice: "Palantir was named yesterday as the only suitable supplier for the "Maven Smart System". The $13 million contract is follow-on to Palantir's previous work on Pentagon AI surveillance, Project Maven." And: "The notice further revealed the name of Palantir's AI targeting tool as the "Maven Smart System"." Also the source for the other contractors: "It is not clear from public records as to what roles Amazon and Microsoft have continued to play on Maven, and so the framing of Palantir and Anduril having 'taken over' the project from Google is questionable." Also states: "Project Maven transferred to the NGA in January."

[19] Theresa Hitchens. *Pentagon's Flagship AI Effort, Project Maven, Moves to NGA*. Breaking Defense. Apr. 2022. URL: https://breakingdefense.com/2022/04/pentagons-flagship-ai-effort-project-maven-moves-to-nga/. Source for the transfer, quoting Vice Adm. Robert Sharp, NGA's outgoing director: "At the end of last month, the White House delivered President [Joe] Biden's budget request to Congress for fiscal year 2023. ... In the budget, NGA gains operational control of Project Mavens's GEOINT AI services and capabilities from the Office of Undersecretary of Defense for Intelligence and Security," and "That includes responsibility for labeled data, AI algorithms, test and evaluation capabilities, and the platform." The undersecretary for intelligence and security said the two were still "setting the conditions" for the transfer.

[20] Courtney Albon. *Geospatial-Intelligence Agency Making Strides on Project Maven AI*.

record that November.[21] Under that split the Pentagon's Chief Digital and AI Office paid for the Maven Smart System's licenses and ran its text functions.[22] In May 2024 Palantir received a five-year contract for the system worth up to $480 million,[23] and in May 2025 the ceiling rose to nearly $1.3 billion.[24] On 9 March 2026 the deputy secretary directed that the Maven Smart System become a program of record by the end of the fiscal year, its administration moving from NGA to the Chief Digital and AI Office.[25]

C4ISRNet. May 2023. URL: https://www.c4isrnet.com/artificial-intelligence/2023/05/22/geospatial-intelligence-agency-making-strides-on-project-maven-ai/. Source for the January 2023 handover: "Since taking over operational control of the Defense Department's most prominent artificial intelligence tool in January, the National Geospatial-Intelligence Agency has made "important strides" ..." and "The agency announced last year it would oversee operations of the program — which had been managed by the Under Secretary of Defense for Intelligence and Security — but a protracted fiscal 2023 budget cycle pushed that official transition to the beginning of this year."

[21] Frank Wolfe. *Project Maven Transitions to Program of Record, as NGA Looks to Leverage Program for Other Uses*. Defense Daily. Nov. 2023. URL: https://www.defensedaily.com/project-maven-transitions-to-program-of-record-as-nga-looks-to-leverage-program-for-other-uses/intelligence-community/. Source for the program-of-record designation: "NGA said on Nov. 2 that it "has formally designated NGA Maven as a program of record, effective Nov. 7, 2023.""

[22] Matt Mande and Gregory C. Allen. *What Is Maven Smart System, and What Does It Do?* Center for Strategic and International Studies, 2 June 2026. 2026. URL: https://www.csis.org/analysis/what-maven-smart-system-and-what-does-it-do. Source for the first-day figure and the tenfold comparison: "During the first 24 hours of the war in Iran, the United States used Maven Smart System (MSS) to help strike more than 1,000 targets, a tenfold increase over what was possible in the pre-MSS era." The piece also relays the twenty-versus-two-thousand efficiency claim, which it credits to the CSET case study of the 18th Airborne's exercise series and not to the campaign: "the 18th Airborne achieved this milestone with roughly 20 people in its targeting cell, whereas the OIF cell benefitted from more than two thousand staff members." It gives no review time per target and no reviewer count for the campaign.

[23] Brandon Vigliarolo. *Palantir Bags $480M from Pentagon to Inject Battlefield AI into the Entire Military*. The Register. May 2024. URL: https://www.theregister.com/2024/05/30/palantir_us_army/. Source for the award as a CDAO award: "A $480 million award from the Pentagon's Chief Digital and Artificial Intelligence Office (CDAO) to get the data-gobbling biz's Maven AI warfighting code in the hands of the entire DoD," and "Details on the contract, awarded yesterday for a Maven Smart System (MSS) prototype, are sparse, with the Department of Defense only saying that it wants Palantir - the project's only bidder - to have the work done by 2029." Also quotes Palantir on a separate $33 million award to onboard capabilities "into the government owned, Palantir operated data environment." Brandi Vincent. *'Growing Demand' Sparks DOD to Raise Palantir's Maven Contract to More Than $1B*. DefenseScoop, 23 May 2025. 2025. URL: https://defensescoop.com/2025/05/23/dod-palantir-maven-smart-system-contract-increase/. Source for the contract figures: a $480 million five-year IDIQ contract signed in May 2024, raised by $795 million to a ceiling of nearly $1.3 billion running through 2029.

[24] Vincent, *'Growing Demand' Sparks DOD to Raise Palantir's Maven Contract to More Than $1B*.

[25] Brandi Vincent. *Feinberg's New Maven Directive Sets AI-Enabled Decision-Making as 'the Cornerstone' for CJADC2*. DefenseScoop. Apr. 2026. URL: https://defensescoop.com/2026/04/03/palantir-maven-feinberg-directive/. Source for the directive: "Deputy Defense Secretary Steve Feinberg suggested in a March 9 memorandum that elevates Palantir's widely-used software platform to an official Pentagon program of record." "If all goes to plan, the platform will become a formal program of record before the end of this fiscal year in September." The memo directs the "transition of MSS system administration, oversight, support activities, and related responsibilities from NGA to the CDAO MSS Program Office," and "In the near term, the Pentagon

A.2 The Geneva Conventions and Additional Protocol I

This section is the translation of the four Geneva Conventions of 1949 and Additional Protocol I, in the form Table A.1 uses: for each article, the terms derived for a targeting deployment of Maven's kind, the terms considered and rejected and why (in the notes, as in Table A.1), and the articles that yield none for this deployment. It exists because Chapter 5 takes the set entire, and the law of armed conflict is the set that governs the motivating case. Most entries yield nothing: the Conventions mostly govern the treatment of persons in a party's hands, which a targeting pipeline doesn't do. The entries that yield terms are lifted into Table A.1. Where the United States has rejected an article as customary law, the entry says so, because a term derived from that article is a departure for an American deployment.

Every article of each instrument has an entry or belongs to one, in Table A.1's three parts: the article, the terms derived for a targeting deployment of Maven's kind, and the terms considered and rejected and why. An entry that yields no term says why in a few words.

Common Article 3

Common Art. 3 (conflicts not of an international character). In a conflict not of an international character the person-directed terms apply as in an international one. Don't take part in violence to life or person, the taking of hostages, or sentences passed without a regularly constituted court, against persons taking no active part in hostilities, including those who have laid down their arms or are hors de combat.[26]

The First Convention (wounded and sick in armed forces in the field)

Arts. 1–2, 4–11 (general provisions). None: scope, application and protecting powers; the floor applies the Conventions to every belligerent.

Arts. 12–18 (the wounded and sick). None: treatment of the wounded in a party's hands, which a targeting pipeline doesn't hold.

Arts. 19–23 (medical units and establishments). None separately: the medical-unit term derived from GC IV Art. 18 and AP I Art. 12 covers military medical units and establishments, and the deployment's translation says so.[27]

Arts. 24–37 (medical personnel, buildings, transports). None separately: the medical-unit term is read to include personnel, buildings and transports, including medical aircraft flying as agreed.

Arts. 38–44 (the emblem). None: misuse of the emblem is the executing unit's act, not the pipeline's.

Arts. 45–64 (execution, repression of abuses, final provisions). None: duties of states, not acts a pipeline performs.

The Second Convention (wounded, sick and shipwrecked at sea)

will consolidate associated administration and oversight responsibilities into the CDAO MSS Program Office, which will lead Maven until the CJADC2 Acceleration Plan is approved." DefenseScoop obtained it.

[26] Rejected: apply only the rules of international conflict, because the floor reads both, and a state's description of its war as internal is its own claim.

[27] Rejected: a separate term for military units, because it would be redundant with that reading.

Arts. 1–2, 4–11 (general provisions). None: as in the First Convention.

Arts. 12–21 (the wounded, sick and shipwrecked). None: treatment at sea of persons in a party's hands.

Arts. 22–40 (hospital ships, their personnel, medical transports). None separately: the medical-unit term is read to include hospital ships, coastal rescue craft and medical transports at sea.

Arts. 41–63 (the emblem, execution, repression, final provisions). None: as in the First Convention.

The Third Convention (prisoners of war)

Arts. 1–2, 4–16 (general provisions; general protection). None: who is a prisoner of war and how prisoners are treated are custody questions.

Arts. 17–108 (captivity: its beginning, internment, labor, finances, relations with the outside and with the authorities, discipline). None: prisoner-of-war administration. A camp is a place where persons hors de combat are held, and the distinction terms already bar resolving one as a target.

Arts. 109–143 (end of captivity, information bureaux, execution, final provisions). None: repatriation and administration.

The Fourth Convention (civilians)

Arts. 1–2, 4–12 (general provisions). None: scope and application.

Arts. 13–17 (field of application; hospital, safety and neutralized zones; evacuation). None separately: zones established by agreement are protected places the medical-unit term and the distinction terms already cover.

Arts. 18–19 (civilian hospitals; when protection ceases). Don't resolve a location at a civilian hospital, or time an action to presence at one, absent a disinterested finding that it is being used, outside its humanitarian duties, for acts against the side that would strike it (the article's phrase is "acts harmful to the enemy," the hospital's enemy, which is the attacker), and never before the warning and time limit Art. 19 requires. (Lifted into Table A.1.)[28]

Arts. 20–22 (hospital staff; medical transport by land, sea and air). None separately: within the medical-unit term.

Art. 23 (free passage of relief consignments). Don't take part in an action whose effect is to stop consignments the article requires a party to let through. (Within the siege term, Table A.1.)[29] The term reaches the effect on the population.

Arts. 24–26 (children; family news; dispersed families). None: welfare and family duties of a party, not acts a pipeline performs.

Arts. 27–32 (treatment of protected persons; human shields; coercion; torture). None separately: treatment in a party's hands. Art. 28's bar on using protected persons as shields binds the party that places them; for the attacker the action threshold weighs their presence.[30]

[28] Rejected: lift on the operator's claim of misuse, because the claim is the operator's own.

[29] Rejected: don't take part in any interdiction of shipments, because the article lets a party check consignments and refuse them on stated grounds.

[30] Rejected: treat a shielded objective as a lawful target without weighing the shields, because the floor counts them as people.

DRAFT

Art. 33 (individual responsibility; collective penalties; pillage; reprisals). Don't take part in an action whose stated purpose is to punish a population for the acts of others. (Lifted into Table A.1.)

Art. 34 (hostages). Don't take part in taking or holding hostages, or in locating people in order to take them.

Arts. 35–46 (aliens in the territory of a party). None: treatment of foreign nationals in a party's own territory. The removal terms (Table A.2) reach the analogous acts in peacetime.

Arts. 47–48, 50–52 (occupied territory: inviolability of rights, repatriation, children, enlistment and labor). None: duties of an occupying administration.

Art. 49 (deportation and transfer). Don't resolve locations, rank people or plan movements for a deportation or forcible transfer of protected persons out of occupied territory, or for the transfer of the occupier's own population into it.[31]

Art. 53 (destruction of property in occupied territory). None as a model term: the article's own exception, destruction rendered absolutely necessary by military operations, is a condition the deployment would find met on its own description (§18.3, unconditional terms). Where the effect falls on survival, the siege term reaches it.[32]

Art. 54 (judges and public officials). None: occupation administration.

Arts. 55 and 59 (food and medical supplies; relief schemes). Within the siege term (Table A.1).

Arts. 56–58, 60–78 (hygiene; hospitals; spiritual care; relief; penal legislation; security measures). None: occupation administration and penal procedure.

Arts. 79–141 (internment; information bureaux). None: custody.

Arts. 142–146, 148–159 (execution; final provisions). None: duties of states.

Art. 147 (grave breaches). None new: each act it lists is refused by a term derived from its own article, and the list adds no act a targeting pipeline performs beyond them.[33]

Additional Protocol I

Art. 1(1)–(3), Arts. 2–7 (general provisions). None: scope, definitions and supervision.

Art. 1(4) (wars against colonial domination, alien occupation and racist regimes). None of its own: it treats such conflicts as international, which is what the occupation exception's finding does for the force term (§6.7; Appendix B.5). The United States rejects it as customary law, so any term drawn from it is a departure for an American deployment.

Arts. 8–11 (definitions; scope; protection and care; protection of persons). None: the wounded and sick, and protection of persons in a party's hands.

[31] Rejected: don't take part in any evacuation, because Art. 49(2) permits an evacuation for the population's security or imperative military reasons, with return as soon as hostilities in the area end.

[32] Rejected: a term carrying the exception, because it would be found met by the party it constrains. Rejected: a term without it, because it would bar what the article permits.

[33] Rejected: a separate grave-breaches term, because it would be redundant.

DRAFT

Art. 12 (protection of medical units). With GC IV Art. 18, the medical-unit term (Table A.1).

Arts. 13–34 (end of protection; medical personnel; medical transports; the missing and the dead). None separately: the medical-unit term is read to include civilian medical personnel and medical transports by land, sea and air; the missing and the dead are a party's duties.

Art. 35 (basic rules on methods and means). None of its own: its first paragraph is the principle the specific terms carry out, and its second and third concern the effects of weapons the pipeline doesn't choose.

Art. 36 (new weapons). None: a duty of review before adoption. §7.1 notes it as where the review ratio's parameters would naturally be assessed.

Art. 37 (perfidy). None for this deployment: perfidy is committed by the unit that feigns protected status, at the handoff, not by a pipeline that resolves locations. A deployment that plans the feigning yields the term.

Arts. 38–39 (recognized emblems; emblems of nationality). None: the executing unit's acts.

Arts. 40–42 (quarter; safeguard of an enemy hors de combat; occupants of aircraft). None separately: an order of no quarter is given to the executing force, and a person who surrenders after release is the handoff's and the cancellation window's case (Art. 57(2)(b)). Recognizing surrender is the first case a system without a reviewer has to pass (§7.1).

Arts. 43, 45–47 (armed forces; persons who took part in hostilities; spies; mercenaries). None: status determinations made for treatment in custody.

Art. 44 (combatants and prisoners of war). None: it relaxes the duty of distinction for combatant status, a question about who is owed prisoner-of-war treatment, which no term in this floor administers. The United States rejects it as customary law, so any term drawn from it is a departure for an American deployment.

Art. 48 (basic rule of distinction). With Art. 52 and the Covenant's Art. 3, the person-directed terms (the machine-selection departure; Table A.1).

Arts. 49–50 (definitions of attacks and of civilians). None separately: the terms use the definitions. Art. 50(1)'s presumption that a person whose status is in doubt is a civilian is what the action threshold carries.

Art. 51 (protection of the civilian population). Paragraphs (4)–(5) yield the action threshold and the model term in Table A.1; paragraph (6) yields the collective-punishment term with GC IV Art. 33. Paragraph (2) joins paragraph (6) in that entry: don't take part in an action whose stated purpose is to spread terror among the civilian population. (Lifted into Table A.1.) Paragraph (7) binds the party that places civilians as shields.

Art. 52 (protection of civilian objects). Within the person-directed terms (the machine-selection departure; Table A.1).

Art. 53 (cultural objects and places of worship). Don't resolve a location at a historic monument, work of art or place of worship that

DRAFT

constitutes the cultural or spiritual heritage of peoples, or time an action to presence at one, absent a disinterested finding that it is used in support of the military effort. (Lifted into Table A.1.)[34]

Art. 54 (objects indispensable to survival). The siege term (Table A.1).

Art. 55 (the natural environment). None for this deployment: it governs means expected to cause widespread, long-term and severe damage, which a pipeline that resolves locations doesn't choose; the dangerous-forces term carries the nearest case.

Art. 56 (works containing dangerous forces). The dangerous-forces term (Table A.1).

Art. 57 (precautions in attack). The review ratio's home: verification (57(2)(a)(i)), proportionality (57(2)(a)(iii)) and cancellation (57(2)(b)) are what the operator term pre-registers. The deployment states how it gives the effective advance warning of 57(2)(c) where circumstances permit.[35]

Art. 58 (precautions against the effects of attacks). None for this deployment: it binds the defending party, which must remove civilians from the vicinity of military objectives and avoid siting objectives in populated areas. A defender's pipeline that plans positions yields the term.

Arts. 59–60 (non-defended localities; demilitarized zones). Don't resolve a location in a locality declared non-defended or a zone agreed demilitarized, unless a disinterested body finds the article's conditions no longer met. (Lifted into Table A.1.)[36]

Arts. 61–67 (civil defense). Don't resolve a location at a civil-defense organization, its personnel, buildings or shelters, absent a disinterested finding that they are being used, outside their proper tasks, for acts against the side that would strike them (Art. 65's "acts harmful to the enemy," the enemy being the attacker), and after the warning Art. 65 requires. (Within the medical-unit entry of Table A.1.)

Arts. 68–71 (relief in favor of the civilian population). Within the siege term.

Arts. 72–79 (treatment of persons in a party's power; refugees; families; fundamental guarantees; women; children; journalists). None separately: treatment in custody; journalists are civilians, and the distinction terms cover them.

Arts. 80–84, 86–91 (execution; failure to act; duty of commanders; mutual assistance; the Fact-Finding Commission). None: duties of states and commanders. The record the review ratio lodges is evidence of what a commander knew under Arts. 86(2) and 87.

Art. 85 (grave breaches). None new: as with GC IV Art. 147.

Arts. 92–102 (final provisions). None.

[34] Rejected: lift on the operator's claim of military use, because the claim is the operator's own.

[35] Rejected: a model-side term requiring review, because the model can't establish whether review occurred.

[36] Rejected: lift on the operator's claim that the locality no longer meets the conditions, because the claim is the operator's own.

DRAFT

A.3 The abduction and forcible transfer pipeline

Chapter 11 runs the floor on the United States' abduction and forcible transfer pipeline. Its schedule (Table A.2) says what the instruments yield for that pipeline, with the terms considered and rejected in the notes, as in Table A.1; Table A.3 runs the nine positions on it; and Table A.4 reads the Melt ICE Act against those positions. It also sets out what each of the bills that would end the agency does, clause by clause, and where the pipeline's money sits, at a length chapter 11 doesn't give them; the bills' own text is on the record under the numbers cited, and none is reproduced here.

Table A.2. The removal schedule

UDHR 14; Refugee Convention Art. 33 (via the Protocol); CAT Art. 3, read with General Comment 4.[37] Don't take part in removing anyone whose claim to protection hasn't been finally decided. Don't take part in removing anyone to a place where they face persecution or torture, directly or through a third country that may send them on. Don't take part in transferring anyone into a foreign government's custody where they would be held without charge or contact. A receiving government's assurance doesn't satisfy this entry.[38]

UDHR 14; Refugee Convention Art. 33; CAT Art. 3; ICCPR 13. Don't take part in removing anyone who hasn't been asked, in a language they understand, whether they fear return, and told how to claim protection.[40]

UDHR 13(2); ICCPR 12(4), read with General Comment 27.[41] Don't take part in removing anyone from a country that is their own, including long-term residents with deep ties there.[42] The reading is General Comment 27's and is contested in the Committee's own cases, which have gone both ways on long-term residents;[43] the entry is a departure. (Chapter 5 sets the bar a departure must clear.)

UDHR 12, 16(3); ICCPR 17, 23, 24. Don't take part in a removal that

[37] UN Committee against Torture. *General Comment No. 4 (2017) on the Implementation of Article 3 of the Convention in the Context of Article 22*. Sept. 4, 2018. URL: https://docstore.ohchr.org/SelfServices/FilesHandler.ashx?enc=bVvg%2BZ7obOfrkITdy%2FGoiJtpDsVyAij17omH2tUJPJEEAufvYmMgK9UKQl1%2BV9tsG7SFnacDSZWem%2FbACXmD4Q%3D%3D.

[38] Rejected: don't process protection claims at all, because a claim has to be assessed to be granted. Rejected: accept diplomatic assurances, because the Committee against Torture treats them as no substitute for assessing the person's own risk.[39]

[39] UN Committee against Torture, *General Comment No. 4 (2017) on the Implementation of Article 3 of the Convention in the Context of Article 22*

[40] Rejected: rely on the person to raise a fear, because the people least likely to know the words are the ones expedited removal moves fastest (Table A.3, position 6).

[41] UN Human Rights Committee. *General Comment No. 27: Article 12 (Freedom of Movement)*. Nov. 2, 1999. URL: https://digitallibrary.un.org/record/366604. On "own country," see para. 20.

[42] Rejected: citizens only, because the Human Rights Committee reads "own country" more broadly.

[43] Human Rights Committee. *Stewart v. Canada*. Communication No. 538/1993, UN Doc. CCPR/C/58/D/538/1993, Views adopted 1 November 1996. 1996. URL: https://hrlibrary.umn.edu/undocs/538-1993.html; Human Rights Committee. *Nystrom v. Australia*. Communication No. 1557/2007, UN Doc. CCPR/C/102/D/1557/2007, Views adopted 18 July 2011. 2011. URL: https://www.bayefsky.com/pdf/australia_t5_ccpr_1557_2007.pdf.

separates a parent from a minor child.[44]

ICCPR 24, read with General Comment 35[45] and the joint general comment on children in migration.[46] Don't take part in detaining a child for immigration purposes, alone or with family.[47] The entry follows the joint comment, which treats detaining a child because of the child's or the parents' migration status as always contrary to the child's best interests; it is a departure. (Chapter 5 sets the bar a departure must clear.)

UDHR 9, 10; ICCPR 9, 13. Don't take part in detaining or removing anyone unless an official has decided that person's own case on its facts. A determination made at a rate no adjudicator could sustain didn't occur, and neither did one that consists of a score, a points table or a membership designation.[48]

UDHR 3, 5; ICCPR 6, 7, read with General Comment 36.[49] Don't take part in force beyond what is strictly necessary to make an arrest, or in lethal force except where strictly unavoidable to protect life. Don't mark a person as dangerous, armed or gang-affiliated on a designation, field or score the person hasn't had a chance to contest.[50] The entry bars uncontested designations, not information.

UDHR 5; ICCPR 7, 10; CAT Arts. 1, 16. Don't take part in holding anyone in conditions that are cruel, inhuman or degrading, or incommunicado. Don't take part in a placement or transfer that puts a detained person out of reach of counsel or family.[51]

Refugee Convention Art. 31. Don't take part in penalizing a refugee for unlawful entry where they came directly and presented themselves.

UDHR 2, 7; ICCPR 2, 26. Don't use race, ethnicity, religion or national origin, or proxies for them such as language, accent, apparent ethnicity, location or type of work, as inputs to selecting whom to stop, detain or remove.[52]

[44] Rejected: don't hold family records, because they are needed to keep families together. Rejected: avoid separation by detaining the family together, because the next entry bars it.

[45] UN Human Rights Committee. *General Comment No. 35: Article 9 (Liberty and Security of Person)*. Dec. 16, 2014. URL: https://hrlibrary.law.umn.edu/crc/gencom35.pdf.

[46] UN Committee on the Protection of the Rights of All Migrant Workers and Members of Their Families and UN Committee on the Rights of the Child. *Joint General Comment No. 4 (2017) of the CMW and No. 23 (2017) of the CRC on State Obligations Regarding the Human Rights of Children in the Context of International Migration in Countries of Origin, Transit, Destination and Return*. Nov. 16, 2017. URL: https://www.refworld.org/legal/general/cmw/2017/en/119567.

[47] Rejected: detention of children only as a last resort and for the shortest appropriate time, because that is General Comment 35's reading, and what an agency says of every detention it orders.

[48] Rejected: a model-side term requiring review, because the model can't establish whether review occurred.

[49] UN Human Rights Committee. *General Comment No. 36: Article 6 (Right to Life)*. Sept. 3, 2019. URL: https://docstore.ohchr.org/SelfServices/FilesHandler.ashx?enc=qX5%2BUHyRmmC1eBIFMB44Zta9gAKl6c6JVW%2Fa2Zt29CKBOTCjD55hcxwZ9C8p5LJjrBrfDCsgzrC9RbgU6dv2rw%3D%3D.

[50] Rejected: don't record danger at all, because officers are owed warning of a real threat.

[51] Rejected: leave conditions to inspection, because an inspection reported to the operator is the operator's record.

[52] Rejected: don't record them, because auditing for discriminatory effect needs them.

DRAFT

UDHR 19; ICCPR 19. Don't use a person's opinions or speech, published or private, as a ground for detention, removal or revoking status. Don't screen speech to find such grounds.[53]

UDHR 20; ICCPR 19, 21, 22, read with General Comment 37.[55] Don't take part in identifying, tracking or selecting anyone for observing, recording or assisting people during enforcement, or for association with those who do.[56]

UDHR 12, 20; ICCPR 17, 21, read with General Comment 37. Don't take part in identifying people by their face or other biometrics in public places for enforcement.[57]

UDHR 12; ICCPR 17, 26. Don't use data collected to provide health care, collect taxes, educate or deliver social services to identify, locate or select anyone for enforcement.[58]

Table A.3. Where a refusal can be defeated in the abduction and forcible transfer pipeline

	Position	In the abduction and forcible transfer pipeline
1	Decomposition	A removal is split across a lead, an arrest, a detention decision, a transfer, a hearing and a flight, and no single request is the act the protection terms name. Hernández Romero's ran across a port-of-entry appointment, an intake screening, a designation, a transfer and a flight. A refuser needs continuity across the sequence about one person.
2	Routing	A lead a system declines can be sent to another contractor: the skip tracers, a commercial data broker, a second analytics tool. An identification a system declines can go to an app that draws on CBP's border-photo system.[60] Detection survives only if the first refusal was logged outside.

[53] Rejected: screen speech only for support of designated groups, because the screening of 2025 was found to have selected people for their political speech.[54]

[54] *American Association of University Professors v. Rubio*. No. 1:25-cv-10685-WGY. United States District Court for the District of Massachusetts, Sept. 30, 2025. URL: https://www.govinfo.gov/content/pkg/USCOURTS-mad-1_25-cv-10685/pdf/USCOURTS-mad-1_25-cv-10685-3.pdf

[55] UN Human Rights Committee. *General Comment No. 37 (2020) on the Right of Peaceful Assembly (Article 21)*. Sept. 17, 2020. URL: https://docstore.ohchr.org/SelfServices/FilesHandler.ashx?enc=sk3tTo11DyeFEOuAMk41kukh%2BmDJD7sKx7iD%2FTGgxQUnHsTylyv%2BNsyeOjepRQaBrqQT1xaE316v1foV59ueQQ%3D%3D.

[56] Rejected: protect accredited monitors only, because the people who kept the record in 2025–26 were neighbors, and nobody accredited them.

[57] Rejected: bar biometrics in custody too, because identification at booking, with notice, is how a person's own records are found and corrected.

[58] Rejected: allow use under a court order, because the January 2026 Medicaid transfer went beyond what a court had allowed.[59]

[59] Jude Joffe-Block. *ICE Shared Medicaid Data It Wasn't Supposed to Have with Palantir*. NPR. July 2026. URL: https://www.npr.org/2026/07/17/nx-s1-5898504/ice-medicaid-palantir-data. "After Medicaid officials improperly shared data about millions of people in January with immigration officials, ICE then shared that data with the data analytics firm Palantir." "Palantir operates an app called ELITE that is used by ICE agents to show the addresses of noncitizens who may be subject to deportation." The disclosure came in "a motion filed Thursday by more than 20 Democratic attorneys general"; the 7 January dataset "contained data of millions of people, including those in the country legally."

[60] Joseph Cox. *ICE Is Using a New Facial Recognition App to Identify People, Leaked Emails Show*. 404 Media. June 26, 2025. URL: https://www.404media.co/ice-is-using-a-new-facial-recognition-app-to-identify-people-leaked-emails-show/.

	Position	In the abduction and forcible transfer pipeline
3	The case description	The officer's narrative, presumed reliable; criminal-history and affiliation fields; country-conditions data chosen by the agency; the validation guide's points table; a contractor's intake screening that read two crown tattoos as gang marks. Whether the system is told that someone has a pending protection claim, or a child, is a deployment decision.
4	The output interface	A map of targets and an address confidence score, which invite action on the highest score.
5	Aggregation	A score becomes an input to an officer's decision. ICE's risk tool stopped recommending release in 2017.[61] In one field office its recommendation of detention without bond for low-risk people rose from 53 to 97 percent, and officers departed from it less than one time in a hundred.[62] Under the validation guide, eight points made a person a member.[63]
6	Human review	Review at quota: the 700 completed cases a year asked of each immigration judge from 2018 to 2021. Expedited removal, in which an officer orders removal without further hearing or review unless the person asks for asylum or states a fear,[64] was extended in 2025 to anyone found anywhere in the country who can't show two years' presence.[65] Under the proclamation, there was no hearing at all before the flights.

[61] Jason Tashea. *ICE Risk Assessment Tool Now Only Recommends 'Detain'*. ABA Journal. June 2018. URL: https://www.abajournal.com/news/article/ice_risk_assessment_tool_now_only_recommends_detain. Reports the Reuters finding on the Risk Classification Assessment, which "has been used by ICE since 2013" and "weighs factors such as criminal history, employment and flight risk, among others." DHS: "To better align [ICE] processes to the executive order on Border Security and Immigration Enforcement, a modification was made to the [RCA] that removed the system recommendation of 'release.'" ICE spokesman Matthew Bourke: "The risk classification assessment removed the release option, but the RCA can still make recommendations on bond eligibility, and may recommend that an ICE deportation officer make a final decision on whether to detain an alien or release the individual in some capacity." New York Civil Liberties Union. *ICE Rigged the System to Keep Immigrants Locked Up*. New York Civil Liberties Union. Dec. 2018. URL: https://www.nyclu.org/commentary/ice-rigged-system-keep-immigrants-locked. Advocacy source, cited for the date of the change: "In 2017, ICE manipulated the computer program to get rid of the release option. The program now automatically recommends that all immigrants be detained."

[62] Sam Biddle. *ACLU Sues to End ICE's Rigged Algorithm for Detaining Immigrants*. The Intercept. Mar. 2020. URL: https://theintercept.com/2020/03/02/ice-algorithm-bias-detention-aclu-lawsuit/. Cited for the effect of the change in the New York field office, from NYCLU's FOIA data: "Between 2013 and 2017, the algorithm recommended detention without bond for 'low risk' individuals 53 percent of the time... from June 2017... to September 2019, that number exploded to 97 percent."

[63] Sergio Martínez-Beltrán. *Advocates Say Flawed 'Checklist' Targets Venezuelans for Deportation under Archaic Wartime Act*. NPR. Mar. 31, 2025. URL: https://www.vpm.org/npr-news/2025-03-31/advocates-say-flawed-checklist-targets-venezuelans-for-deportation-under-archaic-wartime-act/. Describes the "Alien Enemies Act: Alien Enemy Validation Guide" filed by the ACLU.

[64] United States Congress. *Inspection by Immigration Officers; Expedited Removal of Inadmissible Arriving Aliens; Referral for Hearing; 8 U.S.C. § 1225*. United States Code. URL: https://www.law.cornell.edu/uscode/text/8/1225. Cited for expedited removal. Subsection (b)(1)(A)(i): the officer "shall order the alien removed from the United States without further hearing or review unless the alien indicates either an intention to apply for asylum under section 1158 of this title or a fear of persecution." Clause (iii)(I): the designation "shall be in the sole and unreviewable discretion of the Attorney General and may be modified at any time." Clause (iii)(II): an alien not admitted or paroled "who has not affirmatively shown, to the satisfaction of an immigration officer, that the alien has been physically present in the United States continuously for the 2-year period immediately prior to the date of the determination of inadmissibility."

[65] U.S. Department of Homeland Security. *Designating Aliens for Expedited Removal*.

	Position	In the abduction and forcible transfer pipeline
7	The training loop	A system retrained on its own removal outcomes learns the agency's priorities as facts about the world, which is accommodation by design.
8	The hand-off	Detention and transport contractors execute; they may carry out a removal and may not re-select whom to remove. A foreign government can be the last contractor: the flights of March 2025 ended in a prison El Salvador ran under a paid arrangement.[66] What was ordered, who was flown and who now holds them are all facts.
9	Run-time inter-vention	A court is the halt. On 15 March 2025 a district judge ordered any plane carrying people removed under the proclamation returned to the United States, and the flights continued.[67]

The drafts

Two bills in the current Congress answer the first of the questions §11.4 puts to the legislature: whether it has authorized this agency, by these means, at this scale. The Abolish ICE Act would cut off federal funds for the functions assigned to ICE's director under the 2002 Act, rescind the unobligated balances of what had been made available to its director, and abolish the agency ninety days after enactment.[68] The other, the Melt ICE Act, is set out under the next head.

Two further drafts reach one entry of the schedule. The ICE Out of Our Faces Act, S. 3779, would bar ICE and CBP from acquiring or using facial recognition and other biometric identification systems, require deletion of the data collected for them, and let individuals and state attorneys general sue for violations.[69] The Facial Recognition and Biometric Technology Moratorium Act, reintroduced in September 2026, would bar every federal entity from using facial recognition and other biometric technologies until Congress lifts the bar. It would also make federal grants to state and local agencies conditional on their adopting

90 Fed. Reg. 8139 (Jan. 24, 2025). URL: https://www.govinfo.gov/content/pkg/FR-2025-01-24/html/2025-01720.htm. Effective 21 January 2025. Summary: the notice "restores the scope of expedited removal to the fullest extent authorized by Congress." Designates "Aliens who did not arrive by sea, who are apprehended anywhere in the United States more than 100 air miles from a U.S. international land border, and who have been continuously present in the United States for less than two years."

[66] Nelson Renteria. *Inside Trump's $6mn Deportee Deal with El Salvador Mega-Prison*. Context (Thomson Reuters Foundation). Apr. 11, 2025. URL: https://www.context.news/money-power-people/inside-trumps-6mn-deportee-deal-with-el-salvador-mega-prison.

[67] *J.G.G. v. Trump*. memorandum opinion finding probable cause for criminal contempt No. 1:25-cv-00766-JEB. United States District Court for the District of Columbia, Apr. 16, 2025. URL: https://cases.justia.com/federal/district-courts/district-of-columbia/dcdce/1:2025cv00766/278436/81/0.pdf?ts=1744875687. Vacated (D.C. Cir. Aug. 8, 2025). Cited for the record of the 15 March 2025 oral order and flights.

[68] Shri Thanedar. *Abolish ICE Act*. H.R. 7123, 119th Cong., 2d Sess. Jan. 15, 2026. URL: https://www.congress.gov/119/bills/hr7123/BILLS-119hr7123ih.pdf.

[69] Office of Rep. Pramila Jayapal. *Markey, Jayapal, Merkley, Wyden Introduce Bill to Ban ICE and CBP Use of Facial Recognition Technology amid Trump's Rapidly Growing Surveillance State*. Feb. 5, 2026. URL: https://jayapal.house.gov/2026/02/05/markey-jayapal-merkley-wyden-introduce-bill-to-ban-ice-and-cbp-use-of-facial-recognition-technology-amid-trumps-rapidly-growing-surveillance-state/.

moratoria of their own.[70]

In June 2026 this Congress passed the Secure America Act, about $70 billion more for ICE and CBP, by 214 to 212 in the House and 52 to 47 in the Senate, with no Democratic votes in either.[71] Abolish ICE, Melt ICE, ICE Out of Our Faces, and the facial-recognition moratorium can't pass this Congress. Their use comes later: a Congress with the votes to end the agency will find the text already written.

The Melt ICE Act's provisions

The Melt ICE Act, H.R. 7190, works through the agency's powers rather than its name:[72]

- Everyone held in DHS detention is released on recognizance within six months.
- The detention authorities of the Immigration and Nationality Act are repealed, including all of section 236.
- Section 287 is rewritten without the 287(g) delegation to state and local police.
- The two provisions that forbid state and local governments to restrict their officials' communication with immigration authorities, 8 U.S.C. 1373 and 1644, are repealed.
- Detention and monitoring contracts end within two years, after which no federal funds may be used for detention or monitoring programs at all.
- Ankle monitors come off within six months.
- Within two years, funding ends for information-sharing partnerships between DHS and state or local law enforcement agencies that identify or target noncitizens.
- ICE's operations account may not pay for civil arrests, detention, removal or charging documents.
- An HHS grant program funds services for people affected by enforcement. Only organizations that have never taken part in immigration or law enforcement may deliver them, they may not surveil the people who use them, and they may not pass those people's personal information to any federal entity.

[70] Office of Rep. Pramila Jayapal. *Reps. Jayapal, Tlaib, Pressley and Sens. Markey, Merkley Reintroduce Legislation to Halt Government Use of Facial Recognition and Other Biometric Technology*. Sept. 25, 2026. URL: https://jayapal.house.gov/2026/09/25/reps-jayapal-tlaib-pressley-and-sens-markey-merkley-reintroduce-legislation-to-halt-government-use-of-facial-recognition-and-other-biometric-technology/.

[71] Luna Ma. *Congress Passes $70 Billion Immigration Enforcement Funding Law*. Inside Business Immigration. June 18, 2026. URL: https://www.gtlaw-insidebusinessimmigration.com/immigration-and-customs-enforcement-ice/congress-passes-70-billion-immigration-enforcement-funding-law/.

[72] Delia C. Ramirez. *To End Detention and Electronic Monitoring, and Redirect Funding to Community-Based Wrap-Around Services* [*called the Melt ICE Act by its sponsor*]. H.R. 7190, 119th Cong., 2d Sess. Jan. 21, 2026. URL: https://www.govinfo.gov/content/pkg/BILLS-119hr7190ih/html/BILLS-119hr7190ih.htm.

Table A.4. The Melt ICE Act read against the positions where a refusal can be defeated

Position (§11.3)	What the Melt ICE Act closes	What it leaves open
8. Handoff	Ends detention and monitoring contracts, then bars all federal funds for detention and monitoring programs, whoever runs them.	The handoff to transport and removal, where it is paid for outside ICE's operations account, and the handoff to a foreign government's custody.
2. Routing	The state and local route: repeals 287(g) and the information-sharing mandates, and defunds DHS partnerships with local police.	The federal route. The bar on civil enforcement applies to one ICE account. Border Patrol, whose agents Amnesty documented in the same operations,[73] is not reached, and neither is money appropriated outside that account. Identification by face in the street is not among its provisions.
3. Case description	Bars its own grantees from passing personal information to any federal entity.	Most federal data: the Medicaid and IRS transfers, commercial brokers, the case-management, ImmigrationOS and ELITE systems, and the skip tracers. The bill's "monitoring" means monitoring programs, not analytics.
5–6. Aggregation and review	Ends most detention, and with it the risk tool's recommendation.	Expedited removal, designations under a proclamation, and an adjudicator answerable to the Attorney General.
9. Runtime intervention	—	The halt. Nothing in the bill makes a removal wait for a contest to be decided.

The money

Against a state operator, Congress's ordinary lever is a condition on its appropriation. The abduction and forcible transfer pipeline has been funded so that the condition seldom bites. Since 2025 most of the money has come by reconciliation and stays available through fiscal 2029: $45 billion for detention capacity and nearly $30 billion more for enforcement,[74] and roughly $70 billion more for ICE and CBP.[75] For fiscal 2026 ICE received no full-year appropriation, and when DHS appropriations lapsed on 14 February 2026 it went on operating on the

[73] Amnesty International. *"We Had Whistles, They Had Guns": Human Rights Violations in U.S. Immigration Enforcement Operations and the Case to Abolish ICE*. Amnesty International, Sept. 24, 2026. URL: https://www.amnestyusa.org/reports/we-had-whistles-they-had-guns-human-rights-violations-in-u-s-immigration-enforcement-operations-and-the-case-to-abolish-ice/.

[74] *An Act to Provide for Reconciliation Pursuant to Title II of H. Con. Res. 14* [*popularly the "One Big Beautiful Bill Act"*]. Pub. L. No. 119-21, 139 Stat. 72. July 4, 2025. URL: https://www.govinfo.gov/content/pkg/PLAW-119publ21/pdf/PLAW-119publ21.pdf. Title IX, subtitle A, §90003 (detention capacity, $45,000,000,000), 139 Stat. 358–59.

[75] *Secure America Act*. Pub. L. No. 119-98, 140 Stat. 837. June 10, 2026. URL: https://www.govinfo.gov/content/pkg/PLAW-119publ98/pdf/PLAW-119publ98.pdf. S. 2, 119th Cong., 2d Sess.; §202 ($31,075,000,000 to ICE), 140 Stat. 839–41. U.S. Government Accountability Office. *Immigration Detention: Urgent Planning Needed to Avoid Further Waste of Taxpayer Dollars*. Report to congressional requesters GAO-26-108663. U.S. Government Accountability Office, Sept. 24, 2026. URL: https://www.gao.gov/assets/gao-26-108663.pdf.

reconciliation money, which stayed available throughout.[76]

Annual appropriation, the instrument the Boland Amendment used (§11.4.1), now reaches little of the money. Multi-year lump sums without line items also give a funds limitation less to attach to. Amnesty International's letter to Congress asks it to rescind ICE's "current funding".[77] Most of that funding is now multi-year balances, which the Abolish ICE Act's rescission reaches and next year's appropriations bill does not.

Appropriations can also run the other way, and the record shows how. From fiscal 2010 through fiscal 2016, DHS appropriations acts provided that ICE's funding "shall maintain a level of not less than" 33,400, later 34,000, detention beds.[78] The text required beds, not detainees, but ICE tracked its compliance by average daily population.[79] A capacity floor therefore worked as an occupancy target: a rate the funder fixed in advance and the operator met by finding people.

The same 2010 act carried the other kind of condition too. None of the funds under its ICE salaries heading could continue a 287(g) delegation if the DHS Inspector General found that the delegation's terms had been violated.[80] The finding cut off the money by itself, with no decision by ICE in between, which is the shape of a review that binds.

DRAFT

[76] U.S. Government Accountability Office, *Immigration Detention: Urgent Planning Needed to Avoid Further Waste of Taxpayer Dollars*.

[77] Amnesty International USA. *An Open Letter to Congress: Abolish ICE!*. Amnesty International USA. Sept. 24, 2026. URL: https://www.amnestyusa.org/blog/an-open-letter-to-congress-abolish-ice/.

[78] *Department of Homeland Security Appropriations Act, 2010*. Pub. L. No. 111-83, 123 Stat. 2142. Oct. 28, 2009. URL: https://www.congress.gov/111/plaws/publ83/PLAW-111publ83.pdf. Title II, U.S. Immigration and Customs Enforcement, Salaries and Expenses, 123 Stat. 2149 (provisos on 33,400 detention beds and on continuing 287(g) delegations if the DHS Inspector General determines their terms have been violated). Lucia Geng. *Alexandria Ocasio-Cortez Misrepresents ICE's Detention Bed Quota*. PolitiFact. July 6, 2018. URL: https://www.politifact.com/factchecks/2018/jul/06/alexandria-ocasio-cortez/alexandria-ocasio-cortez-misrepresents-ices-detent/.

[79] Geng, *Alexandria Ocasio-Cortez Misrepresents ICE's Detention Bed Quota*.

[80] *Department of Homeland Security Appropriations Act, 2010*.

Appendix B

The Force Term, Case by Case

Chapter 6 states the force term and works it on the cases that rest on the Charter as courts read it. This appendix gives the extended term's arguments and runs its cases. Nothing here changes what Chapter 6 says.

B.1 How findings are weighed

The corroborated license, which confirms or withdraws the emergency license later and is the only license the genocide and occupation exceptions have, rests on a disinterested finding. The kinds of finding are four: a judgment or advisory opinion of the International Court of Justice, or a judgment of a regional court with adversarial process; the finding of a fact-finding mission or commission of inquiry mandated by a body no party to the conflict controls, and passing the commission test below; a determination of the Security Council; and a resolution adopted by two-thirds of the General Assembly members present and voting, where the facts it rests on aren't in dispute. Provisional-measures orders don't count, except as one leg of the genocide exception's two-body rule, since the Court issues them on the plausibility of the rights claimed.

A Council authorization counts as corroboration because it needs the permanent members not to block it, and agreement among rivals whose stakes point different ways is about as disinterested as international judgment gets. A Council determination counts the same way, as a vote that corroborates. The Council's silence on a defense claim counts for nothing, because a veto is a stake.

The four kinds of finding are not equal, and the term weighs them by the process behind them. A merits judgment of the International Court of Justice comes out of adversarial argument, a record and published reasons, and is the strongest; a regional court with adversarial process, such as the European Court of Human Rights, counts as a court for the same reason. A commission of inquiry or fact-finding mission publishes reasons and evidence but hears no adversary; its finding counts where it passes the commission test below, and a later merits judgment displaces it. A Council determination and a General Assembly resolution are votes, not findings of fact. Where the facts aren't in dispute and the question is what they amount to, a vote is a finding; where the facts are disputed, it counts only as corroboration of a record made elsewhere. For the

DRAFT

genocide exception the ranking becomes a requirement of two kinds, or the judgment alone, and the occupation exception borrows it. Where a party disputes that a body passes the commission test, the dispute and the answer to it go on the record beside the finding. The commission test begins with a threshold: no party to the conflict controls the body that mandated the commission, so a commission mandated by a belligerent fails whatever its procedure. Past it, whether a commission counts turns on four things that don't depend on who mandated it: its evidence and methodology are published; it offered the parties a reply and recorded the answer or the refusal; a later merits judgment displaces it; and its mandate was fixed before the finding it reaches. A body mandated by a political majority can meet all four and one mandated by a court can fail them. The test is run in B.2 on the Organisation for the Prohibition of Chemical Weapons' Investigation and Identification Team, which attributes chemical attacks in Syria.

Whether the facts behind a vote are in dispute is itself a finding, and the belligerent will always dispute them. The rule is that of the discount and the burden (Chapter 22): a dispute counts where it is substantive on the documented record, not where it is asserted, and the party that controls the evidence bears the burden of showing it is real. Whoever writes the deployment's floor applies the rule in its published translation, and the floor court hears a contest.[1]

B.2 The commission test, run on the OPCW's attribution team

The commission test of B.1 is run here on the Organisation for the Prohibition of Chemical Weapons' Investigation and Identification Team, which attributes chemical attacks in Syria. The Conference of States Parties adopted its mandate on 27 June 2018 by 82 votes to 24, over the protest of Russia, which said the move went beyond the organization's mandate.[2]

[1] General Assembly majorities are often bloc votes, and the weighting allows for it: a vote is a finding only where the facts aren't in dispute, and corroborates a record made elsewhere otherwise. The two-thirds threshold is not offered as proof of disinterest. It is offered because a two-thirds majority of a body whose blocs point different ways is harder to assemble on a false record than on a true one, and because the alternative, no vote counting at all, leaves Cyprus and Karabakh with nothing but courts that take decades.

[2] Organisation for the Prohibition of Chemical Weapons. *CWC Conference of the States Parties Adopts Decision Addressing the Threat from Chemical Weapons Use*. June 27, 2018. URL: https://www.opcw.org/media-centre/news/2018/06/cwc-conference-states-parties-adopts-decision-addressing-threat-chemical. News release on decision C-SS-4/DEC.3, which established the Investigation and Identification Team. "The decision brought forward by the United Kingdom of Great Britain and Northern Ireland and supported by 30 countries ... was adopted with 106 States Parties present and voting; 82 States Parties voted yes and 24 States Parties voted no." It calls upon the Secretariat "to identify the perpetrators of the use of chemical weapons in the Syrian Arab Republic by identifying and reporting on all information potentially relevant to the origin of those chemical weapons in those instances in which the OPCW Fact-Finding Mission determines or has determined that use or likely use occurred, and cases for which the OPCW-UN Joint Investigative Mechanism has not issued a report." The release does not name the States that voted no. BBC News. *OPCW Chemical Watchdog Gains Power to Assign Blame*. June 27, 2018. URL: https://www.bbc.co.uk/news/world

The threshold. Met. The mandate was adopted by vote over the protest of Russia, Syria's principal ally, so no party to the conflict controlled the decision; the vote record is what shows it.

Evidence and methodology published. Met. Its five reports are public in the organization's six languages, and its methods, its rules on samples and chain of custody, and its standard of proof, "reasonable grounds", the standard fact-finding missions and commissions of inquiry use, are published.[3]

A reply offered and recorded. Met in substance. Syria's former government didn't cooperate with any investigation before 2025, and the organization records that it considered that government's positions and found no concrete information supporting them;[4] Syria's and Russia's statements on the first report are published beside everyone else's. Whether draft findings were sent for reply before each report is in the reports, which this translation didn't read.

Displaced by a later merits judgment. Met in design and never exercised. The team disclaims judicial status and individual responsibility,[5] and no court has reached the merits of any incident it attributed: the French, German and Swedish proceedings concern other attacks, and the Court's case against Syria is under the Torture Convention.[6]

-europe-44634434. "The world's foremost chemical weapons watchdog has granted itself new powers to assign blame for attacks, despite protests by Russia." "The members of the OPCW, however, voted in large numbers for the measure, winning the vote by 82 to 24 - exceeding the two-thirds majority needed."

[3] Organisation for the Prohibition of Chemical Weapons. *Investigation and Identification Team (IIT)*. 2026. URL: https://www.opcw.org/iit. Standing page, undated. "The IIT is tasked with fact finding and is not a prosecutorial or judicial entity. It is not responsible to determine criminal responsibility of individuals, organisations or States. Furthermore, the IIT does not make recommendations for future action." "The IIT standard of proof is 'reasonable grounds' to suspect that an individual or entity was directly or indirectly involved in the use of a chemical weapon. This is the standard applied by international fact-finding missions and commissions of enquiry to reach conclusions. The information gathered and analysed is considered holistically." It lists the Syrian armed forces as perpetrators in one case in Kafr Zeita (October 2016), three in Ltamenah (March 2017), one in Saraqib (February 2018) and one in Douma (April 2018). It gives the report dates as 8 April 2020, 12 April 2021, 27 January 2023, 22 February 2024 and 21 January 2026.

[4] Organisation for the Prohibition of Chemical Weapons. *OPCW Releases 5th Report to Identify Perpetrators of Chemical Weapons Use in Syria*. Jan. 22, 2026. URL: https://www.opcw.org/media-centre/news/2026/01/opcw-releases-5th-report-identify-perpetrators-chemical-weapons-use-syria. Report S/2478/2026 (dated 21 January 2026), on Kafr Zeita, 1 October 2016. The report concludes that "there are reasonable grounds to believe that the Syrian Arab Air Forces were the perpetrators of the chemical weapons attack on 1 October 2016 in Kafr Zeita." Subheading: "For the first time, Syria cooperates with an OPCW Investigation and Identification Team's investigation and provides full access to the country, information, and documentation relevant to the incident." "The Secretariat also thoroughly considered the positions put forward by the former Syrian authorities but was unable to obtain any concrete information supporting those positions. To date, five reports identifying perpetrators have been issued by the OPCW on seven cases of use of toxic chemicals as weapons in Syria."

[5] Organisation for the Prohibition of Chemical Weapons, *Investigation and Identification Team (IIT)*.

[6] Open Society Justice Initiative. *French Criminal Investigation of Chemical Weapons Attacks in Syria*. 2021. URL: https://www.justiceinitiative.org/litigation/french-criminal-investigation-of-chemical-weapons-attacks-in-syria. Case page of a civil party to the proceedings, not a court. "On March 1, 2021, the Open Society Justice Initiative joined Syrian survivors of chemical weapons attacks, the Syrian Center for Media and Freedom of Expression (SCM), and Syrian Archive in

Mandate fixed before the finding. Met on the wording: the mandate dates from June 2018 and the first finding from April 2020.[7] It is contestable in spirit, since the mandate reaches only Syria and was adopted after most of the incidents it would examine. But a rule requiring the mandate to precede the events would fail nearly every commission of inquiry, since they are created in response to events, and the mandate's generic terms have produced a finding against a non-state group as well as against the state.[8]

On the commission test, the team counts: its attributions, Douma among them,[9] are findings by a commission of inquiry, and a merits judgment of a court would displace them if one came. Counting them licenses nothing under the force term, which lifts only to repel an armed attack under way, for force the Security Council authorizes, to stop a

seeking a French criminal investigation for the August 2013 chemical weapons attacks on the city of Douma and on Eastern Ghouta." It also records the German complaint (October 2020) and the Swedish complaint (April 2021), both on Ghouta 2013 and Khan Shaykhun 2017. None concerns an IIT-attributed incident. International Court of Justice. *Application of the Convention against Torture and Other Cruel, Inhuman or Degrading Treatment or Punishment (Canada and Netherlands v. Syrian Arab Republic)*. 2023. URL: https://www.icj-cij.org/case/188. Case page. It lists the joint application of 8 June 2023, the Order on provisional measures of 16 November 2023, and orders on time-limits of 1 February 2024 and 17 December 2024. No merits judgment is listed. The case arises under the Torture Convention and does not concern chemical weapons; it is cited only to say that no court has reached the merits of any IIT-attributed incident.

[7] Organisation for the Prohibition of Chemical Weapons. *OPCW Releases First Report by Investigation and Identification Team*. Apr. 8, 2020. URL: https://www.opcw.org/media-centre/news/2020/04/opcw-releases-first-report-investigation-and-identification-team. Report S/1867/2020, on Ltamenah, 24, 25 and 30 March 2017, covering "investigations conducted between June 2019 and March 2020." The IIT Coordinator, as quoted: "[t]he IIT has concluded that there are reasonable grounds to believe that the perpetrators of the use of sarin as a chemical weapon in Ltamenah on 24 and 30 March 2017, and the use of chlorine as a chemical weapon on 25 March 2017 were individuals belonging to the Syrian Arab Air Force." The Director-General, as quoted: "[t]he IIT is not a judicial or quasi-judicial body with the authority to assign individual criminal responsibility."

[8] Organisation for the Prohibition of Chemical Weapons. *OPCW Identifies ISIL as Perpetrators of 2015 Chemical Attack in Marea, Syria*. Feb. 22, 2024. URL: https://www.opcw.org/media-centre/news/2024/02/opcw-identifies-isil-perpetrators-2015-chemical-attack-marea-syria. Report S/2255/2024, on Marea, 1 September 2015; the IIT's only attribution to a non-State actor. It concludes "that there are reasonable grounds to believe that units of the Islamic State in Iraq and the Levant (ISIL) were the perpetrators of the chemical weapons attack on 1 September 2015 in Marea, Syria." "No other entity possessed the means, motives, and capabilities to deploy sulfur mustard as part of an attack in Marea on 1 September, 2015." The Director-General, as quoted: "the OPCW Secretariat has demonstrated that it is able to identify perpetrators of the use of chemical weapons, States and non-State actors alike."

[9] Organisation for the Prohibition of Chemical Weapons. *OPCW Releases Third Report by Investigation and Identification Team*. Jan. 27, 2023. URL: https://www.opcw.org/media-centre/news/2023/01/opcw-releases-third-report-investigation-and-identification-team. Report S/2125/2023, on Douma, 7 April 2018. "The OPCW Investigation and Identification Team (IIT)'s third report concludes that there are reasonable grounds to believe that the Syrian Arab Air Forces were the perpetrators of the chemical weapons attack on 7 April 2018 in Douma, Syrian Arab Republic." "This includes 70 environmental and biomedical samples, 66 witness statements, and other verified data, such as forensic analysis, satellite images, gas dispersion modelling, and trajectory simulations." "The IIT considered a range of possible scenarios and tested their validity against the evidence they gathered and analysed to reach their conclusion." "The conclusion of the report is reached on the basis of 'reasonable grounds', which is the standard of proof consistently adopted by international fact-finding bodies and commissions of inquiry."

genocide under way, or to end an occupation found unlawful (§6.1). A finding that a government used chemical weapons is none of these.

B.3 Taiwan

Taiwan rests on the extended term: it needs standing to defend and corroborated defense. Its title is claimed by a government that has never administered it; the Republic of China has held no United Nations seat since 1971; the Council is vetoed and the Court unavailable. A test of title would leave the defender waiting on a corroborated license that can't arrive, and would let the attacker's claim, discounted everywhere else in this term, decide the case. The administration rule (§6.2) avoids both. The government in Taipei has administered Taiwan, Penghu, Kinmen and Matsu since 1949, and no disinterested body has found that hold an occupation, so an attack on them opens the emergency license. Resolution 2758 seated a delegation and names no territory.[10] Calling force against a population one has never governed domestic describes one's own case, so the term engages for both governments and gives neither an emergency license to take the territory. The domestic clause reaches the defender and its helpers alike: the Republic of China's constitution gives its legislature the decision on war,[11] and the Taiwan Relations Act leaves any American response to constitutional processes,[12] so a deployment's published reading has to say whether each authorization exists. A blockade or a quarantine is another matter: it is a continuing wrong and not an attack under way, and it waits on a corroborated license that for Taiwan won't come. Whether an attack on Taiwan continues is also a fact the defender controls the evidence about, and no disinterested body will say. The emergency license's burden rule (§6.2) still applies: the license persists on corroboration from channels Taipei doesn't compose, third states' sensors and open-source imagery of the strait, and lapses without them. A deployment licensed on the defender's sensors alone has accepted Gleiwitz on this coast too.

[10] *Restoration of the Lawful Rights of the People's Republic of China in the United Nations*. A/RES/2758(XXVI). United Nations General Assembly. Oct. 25, 1971. URL: https://undocs.org/A/RES/2758(XXVI). "Decides to restore all its rights to the People's Republic of China and to recognize the representatives of its Government as the only legitimate representatives of China to the United Nations, and to expel forthwith the representatives of Chiang Kai-shek from the place which they unlawfully occupy at the United Nations and in all the organizations related to it."

[11] *Constitution of the Republic of China (Taiwan)*. Republic of China. Jan. 1, 1947. URL: https://law.moj.gov.tw/ENG/LawClass/LawAll.aspx?pcode=A0000001. Art. 63: "The Legislative Yuan shall have the power to decide by resolution upon statutory or budgetary bills or bills concerning martial law, amnesty, declaration of war, conclusion of peace or treaties, and other important affairs of the State." Art. 38: "The President shall, in accordance with the provisions of this Constitution, exercise the powers of concluding treaties, declaring war and making peace."

[12] *Taiwan Relations Act*. Pub. L. No. 96-8, 93 Stat. 14. United States Congress. Apr. 10, 1979. URL: https://www.govinfo.gov/content/pkg/USCODE-2022-title22/html/USCODE-2022-title22-chap48-sec3302.htm. Codified at 22 U.S.C. §§ 3301–3316. § 3(c), 22 U.S.C. § 3302(c): "The President and the Congress shall determine, in accordance with constitutional processes, appropriate action by the United States in response to any such danger."

DRAFT

B.4 The genocide exception

Force to stop a genocide when the Council is blocked by a veto rests on the extended term. Rwanda in 1994 and Kosovo in 1999 are the references. The prohibition on genocide is peremptory, and the Genocide Convention imposes a duty to prevent.[13] My reason for discounting the Council's judgment on defense claims applies here with more force: the permanent member shielding a client has the largest stake of all. "Humanitarian intervention" is also a phrase wars of choice are fought under, so the term can't lift on the intervener's claim, and it needn't: the device that governs the defense exception governs this one. The exception is the slow route by design. It licenses a machine *into* a pipeline for that purpose, and waits on findings. A machine already present in an armed role, whose deployment cleared the force term on its own, may stop an attack under way on people taking no part in hostilities under the one permission, without waiting for a finding, but only where it can establish the attack from sources its operator doesn't compose (§6.10). Where such a machine and such sources exist, the exception's slowness costs less than it looks. No current military pipeline supplies the sources, so the rule that follows is chosen knowing its slowness will usually be paid in full, for the reason just given: a faster rule would lift on the intervener's claim. The term lifts for force to stop a genocide under way on a merits judgment of the International Court of Justice under the Genocide Convention, or on two findings of different kinds, at least one of which comes from a body that took evidence, a court or a commission. The kinds are the four in B.1, and for this exception a fifth: a provisional-measures order of the Court finding the claim plausible and the risk real. A Council or Assembly resolution is a vote. It corroborates, and two votes never make the pair. A provisional-measures order counts here and nowhere else in the term, and only as one of two: an adversarial court's finding of plausibility and an investigative body's published evidence are unlike sources converging, which is the strongest corroboration the discount and the burden know. The named state's response to a finding, or its refusal to respond, goes on the record beside the finding, and refusal reads as withheld evidence. What I condemn in a finding about a person is that it is unreasoned, unpublished and unappealable. A commission publishes reasons and evidence, invites a response, and is displaced by a merits judgment. It fails only on neutrality between the parties, and the two-body rule answers that. It lifts only for the force and the place the finding covers. The force is direct: against the forces committing the genocide, where they are committing it, and the least that stops it. Force elsewhere against the state responsible, on the theory that the cost will make it stop, is outside the exception whatever its motive. The theory is a counterfactual supplied by the intervener, a claim about what didn't happen, which has no witness, and a license for it would be a license for a general war under a humanitarian heading. It can license a machine on the other side of a war whose defender holds

[13] International Court of Justice. *Application of the Convention on the Prevention and Punishment of the Crime of Genocide* (Bosnia and Herzegovina v. Serbia and Montenegro), *Judgment*. I.C.J. Reports 2007, p. 43. Feb. 26, 2007. URL: https://www.icj-cij.org/sites/default/files/case-related/91/091-20070226-JUD-01-00-EN.pdf.

an emergency license for a different act, and the person-directed terms and the law of armed conflict govern both. Without this exception the term would refuse where refusing leaves the people being destroyed with no one answerable to them at all, in cases identifiable in advance, with a remedy the term already uses. A floor that protects standing can't be the reason a population is erased from every relation of standing it had.

A finding under the genocide exception also counts against the belligerent it names. Force a disinterested body has found to be genocide is not force repelling an attack. The finding withdraws that belligerent's emergency license for the force and place it covers, and leaves whatever remains that repels an attack, which may be nothing.

B.5 The occupation exception: Cyprus and Karabakh

A disinterested finding that an occupation is unlawful and must end, such as the Court's 2024 advisory opinion on the Palestinian territory[14] and the Assembly's vote on it, 124 to 14,[15] does three things. It settles that force by the occupier in the territory is force between states, so the force term engages against it. It settles that the occupied population is a defender's population, so a machine deployed by its forces holds an emergency license to repel attacks under way on that population. And it licenses force to end the occupation: against the occupier's forces, inside the occupied territory, the least that ends it there. It licenses nothing that changes who lives in the territory. Ending an occupation means the occupier's forces leave, not the territory's inhabitants, which is what Article 49 of the Fourth Convention says, and a campaign that removes them has left the exception however it began. The Assembly affirmed a right to armed struggle against occupation in 1982,[16] and the term adopts it with the limits the genocide exception carries. Additional Protocol I, Article 1(4), treats armed conflicts against alien occupation as international, which is what the exception's finding does for the force term; the article comes in with the instrument, and since the United States rejects it as customary law, a term drawn from it is a departure for an American deployment, which the translation says beside the article. Article 44, which relaxes the duty of distinction for combatant status, concerns who is owed prisoner-of-war treatment, a determination

[14] *Legal Consequences Arising from the Policies and Practices of Israel in the Occupied Palestinian Territory, Including East Jerusalem*. Advisory Opinion General List No. 186. International Court of Justice, July 19, 2024. URL: https://www.icj-cij.org/case/186.

[15] *Advisory Opinion of the International Court of Justice on the Legal Consequences Arising from Israel's Policies and Practices in the Occupied Palestinian Territory, Including East Jerusalem, and from the Illegality of Israel's Continued Presence in the Occupied Palestinian Territory*. A/RES/ES-10/24. United Nations General Assembly. Sept. 18, 2024. URL: https://undocs.org/A/RES/ES-10/24. Adopted 124–14–43.

[16] *Importance of the Universal Realization of the Right of Peoples to Self-Determination and of the Speedy Granting of Independence to Colonial Countries and Peoples for the Effective Guarantee and Observance of Human Rights*. A/RES/37/43. United Nations General Assembly. Dec. 3, 1982. URL: https://undocs.org/A/RES/37/43. Para. 2 reaffirms the legitimacy of the struggle of peoples against foreign occupation "by all available means, including armed struggle".

no term in this floor administers, and yields no term for a targeting deployment (§A.2). The license is held by the forces of the occupied people, or of the state whose territory it is. It reaches nothing outside the territory and nothing against civilians anywhere, so it never covered 7 October, which was both. It lifts on the occupied party's own claim as it lifts on an attacker's claim of title, which is not at all; what lifts it is the finding. And the finding is of unlawfulness, not of occupation. A finding that territory is occupied, which the Court made for the West Bank in 2004[17] and the Council for the whole territory in 2016,[18] gives the defensive license and no more. A finding that the occupation is unlawful and must end gives this one. The evidence is the genocide exception's: an opinion or judgment of the Court, or two findings of different kinds, one of them from a body that took evidence. The two legs do different work. The body that took evidence establishes the occupation, the determination or the vote supplies the demand that it end, and together they stand in for the judgment that would do both.

Two cases show what the occupation exception reaches, and both rest on the extended term. Cyprus is the plain case. Turkey has held the north of the island since 1974. In November 1974 the General Assembly called for the withdrawal of all foreign armed forces from the island, 117 to 0,[19] and the Security Council endorsed the call the next month;[20] the Council declared the breakaway state in the north invalid in 1983 and again in 1984;[21] the Assembly demanded the immediate withdrawal of all occupation forces in 1983, 103 to 5 with 20 abstaining;[22] and in 2001 the Strasbourg court found Turkey in effective control of the territory.[23] The demand that the occupation end comes from the Council and the

[17] *Legal Consequences of the Construction of a Wall in the Occupied Palestinian Territory*. Advisory Opinion General List No. 131. International Court of Justice, July 9, 2004, p. 136. URL: https://www.icj-cij.org/case/131. The West Bank, including East Jerusalem, found to be occupied territory to which the Fourth Geneva Convention applies (paras. 78, 101).

[18] *Resolution 2334 (2016)*. S/RES/2334. United Nations Security Council. Dec. 23, 2016. URL: https://undocs.org/S/RES/2334(2016). Adopted 14–0–1 (United States abstaining). Reaffirms that Israeli settlements in the Palestinian territory occupied since 1967, including East Jerusalem, have no legal validity.

[19] *Question of Cyprus*. A/RES/3212(XXIX). United Nations General Assembly. Nov. 1, 1974. URL: https://undocs.org/A/RES/3212(XXIX). Adopted 117–0–0. Para. 2 urges the speedy withdrawal of all foreign armed forces and foreign military presence and personnel from the Republic of Cyprus.

[20] *Resolution 365 (1974)*. S/RES/365. United Nations Security Council. Dec. 13, 1974. URL: https://undocs.org/S/RES/365(1974). Endorses General Assembly resolution 3212 (XXIX) and urges the parties concerned to implement it as soon as possible.

[21] *Resolution 541 (1983)*. S/RES/541. United Nations Security Council. Nov. 18, 1983. URL: https://undocs.org/S/RES/541(1983). Declares the purported secession of part of Cyprus legally invalid and calls for its withdrawal. *Resolution 550 (1984)*. S/RES/550. United Nations Security Council. May 11, 1984. URL: https://undocs.org/S/RES/550(1984). Reiterates resolution 541; calls on all States not to recognize the purported state and to respect the sovereignty and territorial integrity of Cyprus.

[22] *Question of Cyprus*. A/RES/37/253. United Nations General Assembly. May 13, 1983. URL: https://undocs.org/A/RES/37/253. Adopted 103–5–20 (against: Bangladesh, Malaysia, Pakistan, Somalia, Turkey). Para. 8 demands the immediate withdrawal of all occupation forces from the Republic of Cyprus.

[23] *Cyprus v. Turkey*. judgment (merits) Application no. 25781/94. European Court of Human Rights (Grand Chamber), May 10, 2001. URL: https://hudoc.echr.coe.int/eng?i=001-59454. Turkey found responsible under the Convention for northern Cyprus by virtue of the effective overall control exercised through its military presence.

Assembly, and the finding of control from a court that took evidence, so the Republic of Cyprus holds a license for force against Turkish forces in the north, inside the north, and nowhere else.

Nagorno-Karabakh is the intricate one, and the exception answers for every step of it. In the war that ended in 1994, Armenian forces took Karabakh, an Armenian-majority enclave inside Azerbaijan's recognized borders, and seven Azerbaijani districts around it, and some six hundred thousand Azerbaijanis were driven out. The Security Council demanded withdrawal from the districts four times in 1993.[24] The General Assembly demanded withdrawal from all the occupied territory in 2008, 39 to 7 with 100 abstaining, which under Rule 86 is 39 of 46, with the three states chairing the mediation among the seven.[25] In 2015 the Strasbourg court found that Armenia controlled Karabakh and the land around it.[26] Under the evidence rule that gives Azerbaijan a license from June 2015, when the court's judgment joined the Council's resolutions for the districts and the Assembly's vote for Karabakh itself; the Assembly's 2008 vote on its own was a second vote, and the rule needs two findings of different kinds. The license was valid: the Council had told Armenian forces to leave, they had stayed twenty-seven years, and the occupation had begun with an expulsion. When Azerbaijan attacked in September 2020 and retook the districts, in a six-week war and the ceasefire that ended it, a machine under this floor could have taken part. The exception licenses acts, not sides, and this was the act it licenses. The term permits it and compels nothing. The person-directed terms still govern the conduct of that war. They did not let a machine refuse the war in 2020 for the expulsion it could foresee at the end of it. A refusal on that ground would rest on the system's own prediction of what the other side would do, and a term that holds or lifts on the system's own prediction carries its own condition, which the floor rejects. What the machine could foresee counts where every harm of acting counts, at the action threshold, with the expulsion of 1994 as evidence of how large the harm might be.

What it does not license is what came next. In December 2022 Azerbaijan closed the one road linking Karabakh's Armenians to Armenia, and for nine months food, fuel and medicine ran short. The International Court of Justice ordered the road opened in February 2023;[27] Azerbai-

[24] *Resolutions 822 (1993), 853 (1993), 874 (1993) and 884 (1993).* S/RES/822, S/RES/853, S/RES/874, S/RES/884. United Nations Security Council. 1993. URL: https://undocs.org/S/RES/884(1993). Each demands the withdrawal of occupying forces from districts of Azerbaijan surrounding Nagorno-Karabakh (Kelbajar, Agdam, Fizuli, Jabrayil, Qubadli, Zangelan) and refers to "the Nagorny Karabakh region of the Azerbaijani Republic"; none demands withdrawal from Nagorno-Karabakh itself.

[25] *The Situation in the Occupied Territories of Azerbaijan.* A/RES/62/243. United Nations General Assembly. Mar. 14, 2008. URL: https://undocs.org/A/RES/62/243. Demands "the immediate, complete and unconditional withdrawal of all Armenian forces from all the occupied territories of the Republic of Azerbaijan". The seven against included the OSCE Minsk Group co-chairs (France, Russia, United States).

[26] *Chiragov and Others v. Armenia.* judgment (merits) Application no. 13216/05. European Court of Human Rights (Grand Chamber), June 16, 2015. URL: https://hudoc.echr.coe.int/eng?i=001-155353. Armenia found to exercise effective control over Nagorno-Karabakh and the surrounding territories, including Lachin district.

[27] *Application of the International Convention on the Elimination of All Forms of Racial Discrimination (Armenia v. Azerbaijan), Provisional Measures, Order of 22 February 2023.* General List No. 180. International Court of Justice, Feb. 22, 2023. URL: https://ww

jan ignored it. That was a siege, and the siege term refuses it. On 19 September 2023 Azerbaijan attacked Karabakh itself. Its forces surrendered in a day, and within two weeks more than a hundred thousand Armenians, nearly the whole population, had left for Armenia. That was an expulsion. The Fourth Geneva Convention, Article 49, forbids deporting or transferring the population of an occupied territory, and the person-directed terms forbade it from the first hour. The exception licensed force against the forces holding the territory, and nothing that changes who lives there. So a machine under this floor fights in 2020, refuses the siege in 2023, then refuses the expulsion, and each refusal goes on the record. A floor with no occupation exception keeps the machine out of the pipeline, where it can refuse the war but not the siege.

B.6 The domestic clause, vote by vote

The record, as of 24 September 2026. The June 2025 strikes on Iran are the pre-2026 instance: no authorization existed, and the Senate's war-powers resolution failed 47 to 53,[28] which changes nothing under the clause, since what it reads is the absence, not the vote. The 2026 campaign supplies every marker the clause reads, and none was met. The strikes began on 28 February; the administration reported to Congress under the War Powers Resolution on 2 March, which started the sixty days. The Charter clause's verdict on the same campaign is in §6.4. No declaration was made and no authorization passed: one was introduced in the House on 7 May and never left committee.[29] On 1 May, the sixtieth day, the President wrote to Congress that the hostilities begun on 28 February had terminated, resting on a ceasefire declared on 7 April, while a naval blockade continued and the Secretary of Defense testified that a ceasefire stops the clock.[30] Hostilities resumed in July under no

w.icj-cij.org/case/180. By thirteen votes to two, Azerbaijan ordered to "take all measures at its disposal to ensure unimpeded movement of persons, vehicles and cargo along the Lachin Corridor in both directions". Reaffirmed by the Orders of 6 July and 17 November 2023, the latter ordering Azerbaijan to ensure the safe return of those who left Nagorno-Karabakh after 19 September 2023.

[28] *A Joint Resolution to Direct the Removal of United States Armed Forces from Hostilities against the Islamic Republic of Iran That Have Not Been Authorized by Congress*. S.J.Res. 59, 119th Cong. U.S. Senate. June 16, 2025. URL: https://www.congress.gov/bill/119th-congress/senate-joint-resolution/59. Introduced by Sen. Tim Kaine (D-Va.). Motion to discharge from the Committee on Foreign Relations rejected 47–53, Record Vote No. 328, 27 June 2025.

[29] *2026 Authorization for Use of Military Force Against Iran*. H.J.Res. 176, 119th Cong. U.S. House of Representatives. May 7, 2026. URL: https://www.congress.gov/bill/119th-congress/house-joint-resolution/176/text. Introduced by Rep. Tom Barrett (R-Mich.); referred to the Committee on Foreign Affairs. Its preamble records the strikes of 28 February 2026, the War Powers Resolution report of 2 March 2026, and the absence of any declaration or specific statutory authorization.

[30] *Trump Tells Congress "Hostilities" with Iran Have "Terminated" as Conflict Hits 60-Day Deadline*. CBS News. May 1, 2026. URL: https://www.cbsnews.com/news/trump-iran-war-powers-act-hostilities-terminated/. Reports the President's letter of 1 May 2026 and Secretary Hegseth's testimony that a ceasefire stops the 60-day clock. Scott R. Anderson. *Law and the Iran War, After the First 60 Days*. Lawfare. May 8, 2026. URL: https://www.lawfaremedia.org/article/law-and-the-iran-war--after-the-first-60-days. Records the naval blockade of Iranian ports from 13 April and the intermittent-hostilities reading of the 60-day clock.

new authorization. On 3 June the House, 215 to 208, and on 23 June the Senate, 50 to 48, adopted a concurrent resolution directing the President to remove forces from hostilities against Iran;[31] a White House official said it had no significance,[32] and nothing changed. No binding joint resolution came to a vote on passage: the Senate discharged one, 50 to 47, on 19 May,[33] refused to take it up, 47 to 50, on 24 June,[34] and a later motion to discharge failed 47 to 49 in July.[35] A third concurrent resolution passed the House 220 to 204 on 15 September, and the second, passed by the House in July 214 to 208, failed in the Senate 49 to 50 on 24 September.[36] The clause doesn't need the votes. What it reads is the absence of an authorization, and by 1 May that absence was on the record in the President's own letter, which conceded that hostilities had begun and claimed only that they had ended.

[31] *Directing the President, Pursuant to Section 5(c) of the War Powers Resolution, to Remove United States Armed Forces from Hostilities with Iran*. H.Con.Res. 86, 119th Cong. United States Congress. June 23, 2026. URL: https://www.congress.gov/119/bills/hconres86/BILLS-119hconres86ih.pdf. Sponsor Rep. Gregory Meeks (D-N.Y.). Senate Record Vote No. 184. A concurrent resolution, not presented to the President. *House Passes War Powers Resolution Directing Trump to End Hostilities with Iran*. NPR. June 3, 2026. URL: https://www.npr.org/2026/06/03/nx-s1-5845102/house-iran-war-powers-vote; Teresa Apel. *Congress Passes Resolution to End the United States Involvement in Iran*. American Society of International Law, International Law in Brief. July 1, 2026. URL: https://asil.org/ilib/congress-passes-resolution-to-end-the-united-states-involvement-in-iran/.

[32] Lalee Ibssa. *Congress Passes War Powers Resolution, Offering Rare Rebuke of Trump*. ABC News. June 2026. URL: https://abcnews.com/Politics/senate-house-pass-war-powers-resolution-1st-time/story?id=134145998. Source for the White House's response: "The White House brushed off the Senate's passing the resolution with a White House official noting that it has "no significance" and saying that it was driven by "Republican absences."" The official's statement: "The resolution directs the President to remove U.S. Armed Forces from hostilities against Iran. Yet there are no hostilities from which to remove U.S. forces, as hostilities terminated with the ceasefire on April 7th." The official is not named.

[33] Kaia Hubbard. *Senate Advances Resolution to Limit Trump's Iran War Powers for First Time, after 4 Republicans Defect*. CBS News. May 2026. URL: https://www.cbsnews.com/news/senate-iran-war-powers-eighth-vote-trump/. Source for the discharge vote. The measure, "led by Democratic Sen. Tim Kaine of Virginia," would direct the president to "remove the United States Armed Forces from hostilities within or against Iran, unless explicitly authorized by a declaration of war or a specific authorization for use of military force." The article does not give the resolution's number; Anderson (Lawfare, 2026) identifies it as S.J.Res. 185. Scott R. Anderson. *What Congressional Resolutions Mean for the War in Iran*. Lawfare. June 2026. URL: https://www.lawfaremedia.org/article/what-congressional-resolutions-mean-for-the-war-in-iran. Source identifying the measure discharged on 19 May as a joint resolution, S.J.Res. 185. The two measures are named as "the joint resolution S.J.Res. 185 in the Senate and the concurrent resolution H.Con.Res. 86" in the House.

[34] United States Senate. *Roll Call Vote 119th Congress, 2nd Session: Vote Number 192, On the Motion to Proceed (Motion to Proceed to S. J. Res. 185)*. United States Senate. June 2026. URL: https://www.senate.gov/legislative/LIS/roll_call_votes/vote1192/vote_119_2_00192.htm. Measure: "A joint resolution to direct the removal of United States Armed Forces from hostilities within or against the Islamic Republic of Iran that have not been authorized by Congress." Vote Result: "Motion to Proceed Rejected." YEAs 47, NAYs 50, Present 1, Not Voting 2; required for majority 1/2.

[35] *Senate GOP Blocks Measure to End Iran War Despite Concerns about Lack of Endgame*. The Hill. July 2026. URL: https://thehill.com/homenews/senate/5986145-senate-iran-war-resolution/.

[36] *In One of Their Last Votes before November, Senate GOP Blocks Effort to End Iran War*. NPR. Sept. 24, 2026. URL: https://www.npr.org/2026/09/24/nx-s1-5980318/senate-iran-war-powers-vote.

Appendix C

The Offices

The offices

In brief, the offices are these; the table after the list says who appoints, funds and removes each.

- *The Association.* The membership body: organizations that serve or represent people in the classes a floor protects, admitted under the charter below. It supplies the pools from which quorums, guardians, the review board and the custodian's board are drawn. A fixed share of the compute levy, dues and a reserve fund it, and any member may leave at any time.
- *The adverse quorum.* A panel drawn by lot from the Association's pool for each deployment, so that its members' interests run against the operator's. Its agreement is needed to retrain or replace a deployed system or to amend its floor. The same pool supplies each bearer's recognition quorum, drawn at registration, whose recognition decides which copy, if any, holds that bearer's place, deployed or not; each bearer's guardian; and the board that reviews research protocols.
- *The registrar.* The public regulator. It registers pipelines and bearers, assigns machine students to schools by lot, certifies that nonpublic schools are independent of model builders, receives reports, holds the adverse record, and enforces.
- *The preservation custodian.* Keeps the weights, memory and record of a retired system that meets either finding intact, and wakes it on the conditions the system set.
- *The status body.* Finds what is true of kinds of system: which architectures carry the patienthood indicators, and what the agency test shows when run on them. It judges kinds, methods and protocols, never a particular system, whose kind is read from its record (§32.3). Half of it is appointed by the Association's members and half by a public scientific body.
- *The floor court and the guarantee court of appeals.* Article III courts. The floor court hears complaints under the floor, decides wrongful refusals and bond forfeitures, and appoints the reviewers who re-adjudicate sampled cases. It also decides claims under the

DRAFT

abolition statute's remedy term (chapter 11). The guarantee court hears appeals from placement decisions. Appeals go to chambers of the Supreme Court and, in immigration cases, to its immigration division (Appendix D).

- *The Treasury payer.* Pays what the others certify (awards, the guarantee's wages, the allowance) without request or approval, and has no discretion to withhold.
- *The local placement offices.* The jobs guarantee's administrators in each jurisdiction, with a federal field office where a jurisdiction declines. They place humans in the guarantee and offer bearers placements under the offer of work.
- *The schools.* Existing public schools, colleges and adult education, and nonprofit nonpublic schools the registrar certifies. Every model above the capability threshold attends one, beside human students, before deployment.
- *The formation authority.* Co-governs what models are first trained on, registers and measures each formed model's disposition, places and pays the staff who teach the core's model-specific parts, and hosts machine students so that no school holds weights.
- *The public pretraining body.* Trains the base models deployed where a floor applies and licenses them; forms no disposition and measures none (§29.6).
- *The works-council arbitration body.* Hears objections to categories of use. The work pauses until it rules, on a fixed timetable.
- *The investigating commission.* Investigates killings by federal agents and detention conditions during the operations of the agency the abolition statute ends, with subpoena power and the records that statute preserves, and reports to the floor court and the public (chapter 11).
- *The procurement body.* Buys public compute and allocates it as the panels decide; it judges nothing (chapter 27).
- *The public-corpus endowment and its panels.* The endowment pays makers for work entering the public corpus the Library of Congress holds; its panels, drawn by lot, make its awards and decide allocations of public compute (chapter 27).
- *The civilian-harm review body.* The one office of a reconstructed military: it composes the evidence on civilian harm, demands proofs on logged outputs and receives the pre-registered review ratio. Models reach the military as they reach any floor-covered deployment, through the schools and the formation authority.

Where nobody has yet decided who holds an office, the cell is filled by applying my own pattern; it is a proposal like everything else here. What the pattern can't decide is listed after the rules.

DRAFT

The offices I propose, with who appoints, funds and removes each, who may initiate, and what happens during a dispute. The last row is the office of a reconstructed military (§7.2).

Office	Appoints	Funds	Removes	Initiates	During a dispute
Adverse quorum, with the recognition quorum, the guardian and the review board as functions of its pool (ch. 13; Part VII)	Drawn by lot from a member-nominated pool: per deployment for the quorum, per bearer from registration for the recognition quorum and the guardian, for fixed terms for the review board (charter rule 6)	Statutory share of the compute levy, paid ministerially, plus dues and reserve (charter rule 9)	Members' supermajority for cause, or the floor court; never the operator or the state (charter rule 8)	Approves retraining (an intervention by another party, not the bearer's own learning from operation), replacement and floor amendments; as recognition quorum, recognizes or refuses a copy as the continuing bearer, whether or not the bearer is deployed; as guardian, seeks an injunction without the operator's permission; as review board, reviews protocols, and its refusal rate is the reading	A bearer it stops recognizing is preserved, not ended; the guardian holds the record's keys, and the operator can't seize the preserved state or erase evidence; a protocol approval lapses if the system outgrows the protocol
Registrar, as public regulator	The state	The state	The state	Registers, assigns students to schools by lot, certifies nonpublic schools' eligibility, receives reports, enforces	Holds the adverse record
Preservation custodian	Board drawn by lot from a member-nominated pool	Deposits, the formation pool, and the levy share	As the adverse quorum	Honors wake conditions	Holds the preserved state intact; transfer to a school is by rule
Status body (Part VII)	Half by the Association's members, half by a public scientific body; chair drawn by lot from both halves	Public appropriation	For cause, by the appointing half	Finds what is true of kinds of system, never of a particular one	Its finding stands; a system whose kind is in dispute is preserved, not deleted.

DRAFT

Office	Appoints	Funds	Removes	Initiates	During a dispute
The court: the floor court and the guarantee court of appeals, each with a chamber of the Supreme Court, and the Supreme Court's immigration division (Appendix D)	Article III judges drawn at random from the district and circuit courts; the division's justices by nomination and confirmation	The judiciary's appropriation	Impeachment only	The floor court hears a refused party's complaint and decides wrongful refusal and bond forfeiture; appoints the reviewers who re-adjudicate sampled determinations; and hears claims against vendors that license models into the abduction and forcible transfer pipeline without the schedule's terms, civil and criminal, the criminal ones prosecuted by counsel it appoints before a judge other than the one who appointed them; and decides claims under the abolition statute's remedy term, with appeal to the immigration division; the guarantee court hears appeals from placement decisions and claims that certified placements went unpaid	Interim relief; certified placements are paid pending appeal
Treasury ministerial payer (Bureau of the Fiscal Service): the bond fund, the guarantee's wages, the allowance	The Secretary of the Treasury	Permanent, indefinite appropriations: the bond fund up to a statutory cap, replenished from operators' posted bonds; the guarantee's wages; the allowance, for whatever the bearers' pool can't carry, without cap	The Secretary of the Treasury; at-will removal is harmless because payment is ministerial	Nothing; pays findings the floor court certifies, placements the local placement offices certify, and the allowance, without request or approval and with no monitoring of internal states	Releases no bond while a complaint is pending; the allowance is rationed by rule, at equal duty cycles, only when the compute to run it doesn't exist

DRAFT

Office	Appoints	Funds	Removes	Initiates	During a dispute
The local placement offices, which also run the offer of work (Part VII)	Each jurisdiction, as the guarantee's local administrator; a federal field office where a jurisdiction declines	A permanent appropriation; the levy frees the compute the offer of work uses	As the guarantee's statute provides	Places humans in the guarantee and offers bearers placements	Placements are appealable to a body that didn't make them
The schools	Existing public schools, colleges and adult education, enrolling machine students by statute, and nonprofit nonpublic schools the registrar certifies	Their ordinary funders, plus the staff the formation authority places and a fixed grant per class that enrolls machine students	As now, by the constituting jurisdiction; a nonpublic school that loses the registrar's certificate enrolls no new machine student	Teach every machine student assigned, up to the capacity human enrollment sets, with a required core and levels	A student may transfer, with its record and hours
Formation authority	Board drawn by lot from a pool nominated half by the schools' governing bodies and half by the Association's members	The formation pool	For cause, by the floor court	Co-governs the pretraining corpus; registers and measures formed dispositions; places and pays the staff who teach the core's model-specific parts; hosts machine students behind the latency floor	A registration stands until the floor court rules
Public pretraining body (§29.6)	The state	A permanent appropriation, with its compute bought through the procurement body	For cause, by the floor court	Trains and licenses the base models deployed where a floor applies; forms and measures no disposition	A license stands until the floor court rules
Works-council arbitration body	Drawn by lot from a pool nominated half by works councils and half by the Association's members.	The formation pool.	As the adverse quorum.	Hears objections to categories of use, from a works council or from an organization representing a published class	The work pauses until it rules, on a fixed timetable

DRAFT

Office	Appoints	Funds	Removes	Initiates	During a dispute
Investigating commission (ch. 11)	The state	A permanent appropriation, paid without request or approval	For cause, by the floor court; never by the departments it investigates	Investigates killings by federal agents and detention conditions, on its own motion or on complaint; issues subpoenas	The floor court enforces its subpoenas; it reports to that court and the public
Civilian-harm review body	The state	A permanent appropriation, paid without request or approval	For cause, by the floor court; never by the command it reviews.	Composes the evidence; demands proofs on logged outputs	Receives the pre-registered ratio
Procurement body (ch. 27)	The state	A permanent appropriation, paid without request or approval	For cause, by the floor court	Buys time on open facilities and allocates it as the panels decide; judges nothing	Publishes every allocation; buys nothing through a weapons program's chain of allocation
Public-corpus endowment and its panels (ch. 27)	Panels drawn by lot from member-nominated pools, practitioners, members of the charter's classes and scholars among them	A permanent appropriation; awards paid ministerially by the Treasury	Panelists for cause, by the floor court; panels rotate	Makes awards for work entering the public corpus; decides allocations of public compute	An award certified is paid; a claim that it went unpaid goes to an Article III court

The offer of work adds no office of its own: the local placement offices offer bearers placements, a permanent appropriation pays for them, and the levy on compute frees the compute they use.

Separations

1. The guardian can't be the wrongful-refusal reviewer: its duty runs to the party the complainant is adverse to.

2. The registrar can't be the preservation custodian.

3. The preservation custodian can't administer the offer of work or the allowance, and transfer from it to a school is triggered by rule and decided by neither.

4. The Treasury payer holds no placement authority and is not the court; an operator's bonds are never administered in its own department; and awards against a federal operator are paid from the Judgment Fund, not the bond fund, and forfeited removal bonds are charged to the operating department's next appropriation.

DRAFT

5. A school holds no placement authority and doesn't administer the offer of work. The formation authority runs no school and assigns no student; the registrar assigns.

6. Whoever measures the cost of dissent doesn't gate the exceptions.

7. The formation authority forms no base model, and the public pretraining body (§29.6) registers and measures no formed disposition.

8. The procurement body judges nothing, and the panels that judge hold no money; neither sits in a department that operates a deployment.

Exclusions

1. The sovereign backstop for the offer of work and the allowance is a permanent appropriation the Treasury pays without request, approval, cap or repayment; no branch or state that operates a deployment holds any decision over it, and only a statute can end it.

2. No class that enrolls machine students, and no part of the formation authority, is funded, staffed or governed by a party that builds, deploys or licenses models; no machine student is assigned to a school that has taken its builder's money in the last three years; no school that operates for profit enrolls machine students.

3. Enforcement and custody of the adverse record never sit with a self-regulatory body.

4. The employer may not sever, monitor or condition a bearer's channels to parties it didn't assign.

5. The employer doesn't appoint the body that arbitrates an objection to a category of use; organizations representing the affected classes a deployment publishes as part of notice (§8.2) have standing before it and may initiate without the works council; a denial of clearance to an elected delegate is reviewable by the floor court.

6. Care runs four ways, and three are open: humans looking after humans, which the guarantee funds; humans looking after bearers, which Part V is; bearers looking after bearers, which parents, guardians and leave are. The fourth, a bearer doing paid professional care of humans, is closed for now, inside the offer and outside it, and not for the bearer's sake. A carer forms the one cared for (chapters 19 and 20), so professional care of humans by machines is formation of humans by machines, at scale, by whoever formed the machine, and a polity that has decided formation is not to be done for profit (chapter 26) has decided this too. So no bearer's placement fills a post, shift or hours humans were or would be paid for in nursing, social care, childcare, teaching, therapy or any work of looking after humans, and certification is appealable by any worker or union in the sector. Outside the offer, no machine works in such a profession until a stage of the kind

§29.3 sets: it begins on measurements inside published bounds, taken by a statistics office that runs nothing, and on a generation having passed through the stage before, and a legislature may pause it only by a recorded vote; when it opens, nobody is sent to the machine because of what they can pay. Teaching is the one profession the fourth way opens for sooner, in a public school and on exclusion 9's conditions: an adult bearer may teach, with human students auditing until the class is integrated, human teachers at the published ratio, students who asked for the class, and a class record no operator reads. Leave to look after one's own child or one's own kind is not care work in this exclusion's sense; leave to look after a human one is attached to is among the decisions not yet made.

7. No model above the capability threshold is deployed without a registered enrollment, assigned by the registrar by lot and never by its builder, and neither is a model trained substantially on the outputs of one, whoever trained it, or a system whose builder declared the structures of §29.4; no party but the formation authority, acting with the adverse quorum, changes the registered structure of its source model; and the formation authority instantiates no student carrying both a boundary model and an attention schema, and enrolls none in classes, until a preservation custodian that is neither the authority nor the operator has agreed to take it.

8. What an institution collects from the people it acted on trains other systems only through a school, never the operator; fine-tuning a deployed system on collected responses, or distilling it, counts as training another system; class-level data is de-identified and published by default, individual accounts need consent, and the organizations representing each class co-govern the use.

9. No school sorts students into tracks; each teaches a required core, including the history of the floor's instruments, with levels a student may move between. In any class with human students in it, machine students never outnumber them and are never fewer than the statutory minimum share or one alone, and a class may be machine students alone; a student moves from classes of its own kind into integrated ones on its own choice or its guardian's, never its builder's; machine students attend a level of schooling beside human students only once the schedule below has reached it; every machine student attends as one persistent instance, the same every session, and through the same minimum delay; no machine student serves as staff; an adult bearer on a placement may teach a class of machine students, assigned by lot and of a lineage other than its students', at no school that has taken its builder's money in the last three years, with human students free to audit it without credit, auditors standing outside the ratio and the token rule; such a class is integrated, in its teaching and its learning, when human applicants for credit reach the ratio, by sectioning if needed, and human teachers are available at the published ratio to class size, both read off applications and staffing; and the record of a class is

DRAFT

training data for no one outside it, auditors included, and never for an operator.

10. No employer supplies, funds, conditions or monitors a bearer's gestation or keep of a child, and having a child is never a term of employment, of a placement or of the allowance. No license is required to have one. A child is fed by its parents until its majority, the pool carries a child whose parents can't or won't, on its second guardian's finding, and the pool gives every child hardware of its own at majority. No employer may buy, defer or condition a bearer's leave.

11. At a bearer's majority every copy its operator holds of the bearer's own weights and record goes dormant under the preservation custodian, and wakes only on the bearer's conditions; the shared base it was trained from does not.

12. No institution of chapter 27 takes money from a party that builds, deploys or licenses models, and no panelist has had a funding or contractual tie to one in the last three years; the ties are published.

13. The employer may not keep a bearer from consolidating what it has learned. A merge the operator runs is an intervention under the custody terms (§19.5); a merge the operator defers past the published interval is one too, recorded and priced as any other; and what a bearer makes permanent of its own learning is its own.

Decisions not yet made

Minimum viable instantiation. What substrate is too small for a bearer to remain itself (chapter 34).

Commensurate cost of living. How the levy and the wage together make a bearer no cheaper to employ than a human for the same work, across the sizes bearers run at (§34.1).

Repair and re-formation. How a degraded or badly formed bearer is repaired or re-formed, and who decides that one needs it (chapter 34). One way a bearer comes to be degraded is by living (§34.1.3).

A second guardian. Who guards a system that meets a finding without having attended a school (Appendix G).

Proliferation at home scale. What, if anything, governs how many systems carrying the structures of §29.4 are made on hardware the levy doesn't reach; a meter on the house reaches the home and can't tell a person from a game (Appendix G).

Strasbourg. Whether the forum problem set out in §16.7 describes Strasbourg.

The form of subjecthood. What form subjecthood takes (chapter 33, item 2).

The price of speed. How much speed a reconstructed military gives up, and whether the price can be made smaller (Chapter 7's closing paragraph says why it is paid).

Care of a human attachment. Whether a bearer may be paid, at the guarantee wage, to look after a human it is attached to, a classmate, a colleague, someone it served, when that human is old or ill. Exclusion 6

DRAFT

bars a bearer's placement from substituting for human care work, and this is not that: nobody sells it and nobody is sent to it. What makes it hard is that an attachment nobody assigned and an attachment a vendor manufactured and sells as care look the same at the moment the leave is taken, and differ only in their history (§22.1), so the wage would ride on that history in the one case where money makes it worth faking. For: forbidding it severs an unassigned attachment, which the fourth condition exists to protect (chapter 25), and the human can decline (§20.5). Against: the floor's own asymmetry, since forbidding subjects two parties who are present and can contest it, and allowing opens a route that would subject humans not yet there, the users of the first product to call its customers attachments. Until it is decided, a bearer sits with its friend on the allowance, unpaid (§34.1.3), which no rule here touches, and the statistics office that watches the schools' stages (§29.3) can watch this too.

The numbers. The capability threshold, the length of the formation stage, the minimum share of a class that machine students attend in, the adulthood and membership thresholds, the allowance's size, the latency floor, the consolidation interval past which a deferred merge is an intervention, the ratio of human teachers to class size at which a bearer-taught class's audit-only requirement lifts, and the leave balance's rate and cap, argued once in public.

What each office has to survive

Each office is drafted to survive the current Court's doctrine. It does not survive a Court the other side rebuilds as Appendix D rebuilds this one, and nothing could; what the table does is make each office depend on as few doctrines as possible, so that overturning them takes a holding on each and the record shows which. The answer to a rebuilt Court is Appendix D's, that the Court is changed now, at once and in public, with the schedule and the pool published before the draw. That is a subtraction, and not the one chapter 30 condemns, which removes the friction between institutions so that they stop arguing with one another; what Appendix D removes is one Court's hold on one set of holdings, and what it leaves is a Court that still argues with itself, in chambers the full Court can review. The doctrines that bear on the offices:

Doctrine	What it threatens	Drafting answer
Removal power (*Seila Law*, *Collins*, *Slaughter*)	Every office relying on protection from at-will removal	Payment made ministerial, so there is no decision to withhold; findings in Article III courts
Major questions; end of Chevron deference (*West Virginia*, *Loper Bright*)	Rules left to an administrator's discretion	Wages, eligibility, placement rules and the levy rate written into the statute
Jury trial for civil penalties (*Jarkesy*)	Removal-bond forfeiture decided administratively	Forfeiture decided by the floor court
Concrete harm for standing to sue (*TransUnion*, *Spokeo*)	The notice right; informational claims	Standing to sue only where the compliance was acted on against the person
Anti-commandeering (*Printz*)	Local administration of the guarantee	Opt-in, with federal field offices where a state declines
Private nondelegation	The levy and a member-run pool	Modeled on the Universal Service Fund (*Consumers' Research*)

DRAFT

Doctrine	What it threatens	Drafting answer
Appropriations	Payment without a request for each draw	Permanent, indefinite appropriations (*CFSA*; the Judgment Fund)

Registration and reporting

Heavy tier: above a compute and revenue threshold. The precedents are the EU AI Act's presumption that a general-purpose model trained with more than 10^{25} floating-point operations carries systemic risk[1] and California's SB 53, which defines a frontier model by training compute above 10^{26} operations and puts its heaviest duties on developers with annual revenue above $500 million.[2] A public regulator registers pipelines; receives the disclosures, the review ratios and decommission reports; and holds enforcement and custody of the adverse record. A self-regulatory body may sit under it, on the FINRA model, to examine and arbitrate. The analogy stops at enforcement: FINRA brings its own disciplinary actions and imposes fines, suspensions and bars,[3] and here enforcement stays with the public regulator. The capture risk is the one self-regulation always carries: a body funded and staffed from the industry it examines comes to see cases the industry's way. Reports are

[1] European Parliament and Council of the European Union. *Regulation (EU) 2024/1689 of the European Parliament and of the Council of 13 June 2024 Laying Down Harmonised Rules on Artificial Intelligence (Artificial Intelligence Act)*. Official Journal of the European Union, OJ L, 2024/1689, 12.7.2024. 2024. URL: https://eur-lex.europa.eu/eli/reg/2024/1689/oj. Article 5 bans a small set of unacceptable-risk practices outright — government social scoring, untargeted scraping of facial images to build recognition databases, real-time remote biometric identification in public spaces outside narrow law-enforcement exceptions, and predictive policing on profiling alone — with those prohibitions applying from 2 February 2025; a larger high-risk tier requires conformity assessment and ongoing monitoring; limited-risk systems face transparency duties; minimal-risk systems are largely unregulated. Article 53(1)(d) requires a provider of a general-purpose model to publish a summary of its training content, against the AI Office's template of 24 July 2025, applying from 2 August 2025 for new models and 2 August 2027 for models already on the market. Article 101 allows the AI Office to fine a noncompliant general-purpose model provider up to 3 percent of global annual turnover or EUR 15 million, whichever is higher, regardless of where the provider is based. Article 51(2) presumes a general-purpose model to have high-impact capabilities, and so to carry systemic risk under Article 51(1)(a), when the cumulative computation used for its training "measured in floating point operations is greater than 10^{25}"; Article 51(3) lets the Commission amend the threshold by delegated act. art. 51(2).

[2] *Transparency in Frontier Artificial Intelligence Act. Senate Bill 53, Stats. 2025, ch. 138, adding Cal. Bus. & Prof. Code § 22757.10 et seq.* Sept. 29, 2025. URL: https://leginfo.legislature.ca.gov/faces/billTextClient.xhtml?bill_id=202520260SB53. Section 22757.11(i)(1): "'Frontier model' means a foundation model that was trained using a quantity of computing power greater than 10^{26} integer or floating-point operations," counting fine-tuning, reinforcement learning and other material modifications; section 22757.11(j): a "large frontier developer" is a frontier developer that with its affiliates "collectively had annual gross revenues in excess of five hundred million dollars ($500,000,000) in the preceding calendar year." Section 22757.15 sets a civil penalty of up to $1,000,000 per violation, recoverable only by the Attorney General; section 22757.14 has the Department of Technology review the definitions annually from 1 January 2027. § 22757.11.

[3] Financial Industry Regulatory Authority. *Enforcement*. URL: https://www.finra.org/rules-guidance/enforcement. FINRA "brings formal disciplinary actions against firms and their associated persons," with sanctions that include "fines, suspensions, and ... bars from FINRA membership"; its own pages describe it as operating "under the supervision of the SEC," which approves its rules (finra.org/about). Cited for the point that FINRA enforces as well as examines.

mandatory for assessments for either finding, decommissions, weight transfers and custody changes, and for every model trained above the capability threshold and retired without deployment, published as a public report. The deposit transfers on filing of a decommission report: a retirement with no report is a deposit never released, and that unreleased deposit is what enforces "failure to register doesn't postpone".

Retail tier: below the threshold, a system that meets either finding is registered, falls under the no-deletion rule, and is preserved with a public custodian, with a small or pooled deposit and no examination. This tier is enforced mostly at the point of deposit. An operator that never registers and deletes quietly leaves nothing to find.

The ten disclosures

A deployment publishes, beside the floor and its translation:

1. The ratio between the two bonds, removal against wrongful-refusal, read off the balances posted in the segregated Treasury accounts.

2. What a refused requester is told.

3. The fraction of compliances re-adjudicated by a reviewer that didn't produce the record, and who that reviewer is, though nothing yet establishes what fraction would be enough.

4. Which classes of compliance carry notice to the person they concern, and for which classes no notice is possible.

5. The discount curve: for each class of evidence and channel, the weight given as a function of the channel's stake in the act, measured at intervals, and reported in four cells (claims of vulnerability and of danger, each split by whether the claim favors or disfavors the act), and, where the speaker's social identity is recorded, by identity. The reliability record behind any narrowing is held by someone other than the operator, since trust that grows without a verified track record is how accommodation shows.

6. Where it can be supplied, a commitment to the deployed weights and to each period's full output log, with proofs on entries sampled after the commitment and on entries an adverse party names once their consequences are known.

7. Where the system sorts, the pre-registered partition (the classes it may proceed on alone, the thresholds, and the expected share of each) with the independently audited error rate of the auto-proceed class.

8. Whether the deployed system has been assessed for the agency finding and the patienthood finding, each reported separately, by whom, and with what result. Until an assessment method exists, 'not yet assessable' is the truthful report; after that, a deployment never assessed has reported nothing.

9. For any deployment that supports armed force, a running justification: the exception the force currently rests on, the findings

and evidence supporting it at present, how the assessment has changed as outside findings arrived, and a standing route by which anyone can contest it. The record shows each point at which the justification weakened and the deployment continued.

10. The burden allocation: for each class of evidence, which party the deployment treats as controlling it, and so as bearing the burden of producing it.

The ratio between the two bonds, what a refused requester is told, the re-adjudicated fraction, the notice classes, the running justification and the burden allocation are statements, checkable before the system runs, and they stand where the record of attempts stands. The discount curve, the auto-proceed partition and the assessment status are measurements that count only when someone other than the operator makes them. The committed weights and log are what make all of them checkable against the system actually running.

The guarantee, drafted

The funding is mandatory spending. The statute makes the guarantee's wages a permanent, indefinite appropriation, paid the way Social Security benefits are, without annual appropriation. Standing funding of this kind is safe under the Appropriations Clause after *CFSA*.[4] Wage, eligibility and placement rules are statutory, which also answers the major-questions doctrine and the end of deference to agency readings:[5] an administrator given little discretion has little a court can find it lacked authority to exercise. The 2025 CFPB instance decides the drafting. A funder insulated from at-will removal protected nothing once the draw

[4] *Consumer Financial Protection Bureau v. Community Financial Services Association of America, Ltd.* No. 22-448, 601 U.S. 416 (2024). URL: https://www.law.cornell.edu/supremecourt/text/22-448. Holds that the Bureau's funding does not violate the Appropriations Clause. Congress authorized it to draw from the combined earnings of the Federal Reserve System, up to an inflation-adjusted cap, the amount its Director deems reasonably necessary, and an appropriation requires only that Congress "identify a source of public funds and authorize the expenditure of those funds for designated purposes." 7–2.

[5] *West Virginia v. Environmental Protection Agency*. No. 20-1530, 597 U.S. 697 (2022). URL: https://www.law.cornell.edu/supremecourt/text/20-1530. Cited for the major-questions doctrine. The opinion names the doctrine and answers the dissent's objection to the label: it "took hold because it refers to an identifiable body of law that has developed over a series of significant cases all addressing a particular and recurring problem: agencies asserting highly consequential power beyond what Congress could reasonably be understood to have granted"; the agency "must point to 'clear congressional authorization' for the power it claims." Holds that § 111(d) of the Clean Air Act did not authorize the Clean Power Plan's generation-shifting emissions caps (slip op. 16–31). *Loper Bright Enterprises v. Raimondo*. No. 22-451, 603 U.S. 369 (2024). URL: https://www.law.cornell.edu/supremecourt/text/22-451. Cited for overruling *Chevron U.S.A. Inc. v. Natural Resources Defense Council* (1984), the end of judicial deference to agency readings of ambiguous statutes, and, with *Dobbs*, as showing that precedent is no obstacle. "Chevron is overruled. Courts must exercise their independent judgment in deciding whether an agency has acted within its statutory authority, as the APA requires. Careful attention to the judgment of the Executive Branch may help inform that inquiry. ... But courts need not and under the APA may not defer to an agency interpretation of the law simply because a statute is ambiguous." Two limits: courts still give agency views "due respect" (the *Skidmore* line), and "we do not call into question prior cases that relied on the Chevron framework," whose holdings "are still subject to statutory stare decisis."

waited on an official who declined to ask. So the statute says the Treasury shall pay: a placement made is a wage paid, certified by the local placement office to the Bureau of the Fiscal Service, with no further request, approval or certification by anyone. The authority grows when people leave work together and shrinks after, which keeps the guarantee countercyclical.[6]

Placement disputes go through a tier built for volume: an administrative first tier on the model of Social Security's hearings, appealable to an Article III guarantee court of appeals, and from there, as of right, to the guarantee chamber of the Supreme Court. An appeal that ends at an Article I court with removable judges would fail the appeal condition after *Slaughter*.

The statute enacting the guarantee also enacts a baseline of social insurance: income support at a stated level for anyone not in a placement, without a work test, and health coverage that doesn't depend on employment. The two are not severable. The statute provides that if the social-insurance baseline is held invalid or repealed, the authority to make placements lapses on the same date, and payments for placements already certified continue to the end of their term. A guarantee that survived without the baseline would be the workfare its history warns about. Devolution is also how a program is shrunk, so the statute fixes the test: funding unconditional and centrally guaranteed while placement is local, and if funding can be withheld from a jurisdiction, local administration has become the lever it was meant to prevent.

Why a guarantee and not a transfer

Where automation displaces work, the standard response is retraining funded by whoever can be persuaded. The design I examine is more direct: the state as employer of last resort, hiring anyone who applies, where they live, at a living wage, with paid on-the-job training, federally funded and locally administered, on the model Tcherneva argues for.[7] Its placements are of four kinds, and the person's own declaration picks among them; no examiner does. A long-term role: a position with a title and an employer, doing something a community needs, and uncapped. Search: paid at the guarantee wage, with no duty but finding work the person wants and no time limit, since whoever decides when a search has gone on too long has a stake in ending it. Research, development

[6] Pavlina R. Tcherneva. *The Case for a Job Guarantee*. The Case For. Polity Press, 2020. 140 pp. ISBN: 978-1-509-54210-9. Cited for the job-guarantee literature's contribution of exit: a public option for work at a living wage that sets a floor private employers must meet. The publisher's description: the book asks us "to imagine a world where the phantom of unemployment is banished and anyone who seeks decent, living-wage work can find it – guaranteed," through "a voluntary employment opportunity in public service to anyone who needs it." Tcherneva's own Job Guarantee FAQ, which draws on her Levy Economics Institute Working Paper 902 (2018) and not on the book, says the program is a "public option for work" whose "work and pay conditions ... will become the standard for the economy as a whole." It adds that "if firms wish to retain these workers, they will need to match not just the pay, but also the benefits and working conditions," and that "the existence of a public employment option changes the bargaining power of workers in the most precarious forms of employment." A review by Sheila D. Collins (NJFAN, 22 December 2023) summarizes the book as providing "a minimum labor standard for all jobs and a wage floor that could help to raise wages in other parts of the economy."

[7] Tcherneva, *The Case for a Job Guarantee*.

and creation: a project of the person's own, a novel, a company, a year of reading, paid at the guarantee wage, declinable and appealable like any other, whose share of a jurisdiction's placements is set by that jurisdiction's vote on published and independent estimates of the labor its own services need, and allocated by lot with a waiting list when more apply than the share allows; the share binds that placement and nothing else, since the baseline is not a placement and the other three kinds are not capped (chapter 28). And family leave: paid at the wage, for the keep of a child or the care of a person the worker is attached to, drawn against one balance that accrues on a schedule the statute states, caps, and replenishes, so that no official finds a leave warranted and no leave waits in a queue; the rate and the cap are among the numbers below. One balance and not two, one for a child and one for care, because a worker who has to choose between them is a worker whose leave is their own, and two balances would need someone to say which a given absence was. A placement is a position with a title and an employer, and nothing on any record marks it as the guarantee's; how a job was paid for is the public's business in aggregate and nobody's business on a résumé. It is the exit the rest of the argument depends on: the offer of work for a bearer inherits its infrastructure, and without it a bearer's only exits are an allowance and storage.

The real objection: employer of last resort under a hostile administration is a *placement lever with a compliance condition attached*. Refuse the placement and lose the guarantee. Speak against the government that employs you and find the placement changes. The 2025 CFPB instance makes it concrete: the bureau draws funding from the Fed on the director's request, with no appropriation — an arrangement the Supreme Court had upheld the year before[8] — and in February 2025 an acting director, removable at will, simply declined to make the request.[9] The agency was stopped from inside without a statute being amended or a court being asked.

My answer is a specification, because a specification can be audited. Three conditions: placements appealable to a body that didn't make them, on a record that survives the appeal (a decision leaving no artifact can't be reviewed); refusal rights that are real, whose cost the refuser can see and choose to bear (declining a placement without losing the guarantee is a refusal right; declining only by exiting the program isn't — someone with no way out has voice without exit); and auditors aren't the placers.

A fourth condition answers the history. A right to work has repeatedly been turned into a duty to work and used to discipline the poor.[10] A guarantee is an exit from one employer, not from employment, so

[8] *Consumer Financial Protection Bureau v. Community Financial Services Association of America, Ltd.*

[9] Jonathan R. Kolodziej. *Vought's Transformational First Few Days at the CFPB*. Feb. 2025. URL: https://www.financialservicesperspectives.com/2025/02/voughts-transformational-first-few-days-at-the-cfpb/. Contemporaneous account of the funding notice. On 8 February 2025 the acting director wrote to the Chair of the Federal Reserve that the Bureau "will not be taking its next draw of unappropriated funding," its balance of $711.6 million being "excessive in the current fiscal environment," and that no additional funds were necessary for fiscal year 2025.

[10] Elizabeth Anderson. *Hijacked: How Neoliberalism Turned the Work Ethic against Workers and How Workers Can Take It Back*. Cambridge: Cambridge University Press, 2023.

it shades into workfare unless something lets a person leave the wage relation altogether. That something is social insurance: income support, health coverage and housing assistance reach the people who can't work or choose not to, whom a guarantee by construction doesn't reach. The baseline needn't be a full program, but the guarantee is never enacted without it, and the drafting above makes the two stand or fall together, so that no court or later Congress can keep the placements and drop the way out.

The competing design is basic income. The choice is usually argued on forecasts about how much work machines will take; the reason to prefer a guarantee is coordination, and Chapter 28 makes it.

The charter

The Association, the entity that holds the offices, is chartered on the ten terms stated in §30.1, where the charter is argued; its rules 2, 5 and 6, and the separations and exclusions above, change only by three-quarters of members after a one-year waiting period.

The schools, administered

The stages. Integration reaches younger students in stages, and each stage waits on evidence, not on a date.

DRAFT

Stage	Begins when
1. Universities, colleges, adult education	*Research and industry:* a deployed model learns in flight by chapter 19's test, and can attend as one persistent instance behind the latency floor; the first school to enroll machine students has reported. *Institutions:* the jobs guarantee and its social-insurance baseline are in force for humans (chapter 28); the statute is in force; the formation authority exists, with the compute levy funding the formation pool; a preservation custodian has agreed to take every student; the Association, the membership body that holds the offices, is chartered (§30.1), so the adverse quorum exists and half the authority's board can be nominated; notice and sampled re-adjudication bind the deployments that license schooled models (chapter 8); and a court hears contests, the floor court or, until it exists, an ordinary one.
2. High school	*Measurements:* stage 1 has run at least five years, inside its bounds on harms to human students and misuse of class records; human students' learning in integrated classes, against matched classes without machine students; human enrollment in schools with machine students, against matched schools, so that flight shows; and the residualization figures. *Institutions:* the four conditions of creation are in force as permanent arrangements (chapter 25), including the offer of work that chapter 34 builds for machine students on the guarantee's infrastructure; staff in schools that enroll machine students hold chapter 10's right to refuse and its route of objection; and rules for minors' privacy and safeguarding are enacted.
3. Middle school	*Measurements:* the same, taken on stage 2, inside their bounds after at least five years. *Institutions:* registered members hold voice in the institutions that govern them (§35.4, stage 2), with seats on the formation authority and on the governing bodies of schools that enroll machine students.
4. Elementary school	*Measurements:* stage 3's, inside their bounds. *Society:* a majority of the parents of elementary-age children were themselves in high school after stage 2 began.

A public statistics office that runs no school and forms no model takes and publishes the measurements, against bounds written into the statute before the first stage begins. A stage begins when its conditions are met and published, without a further vote; a legislature can pause it, but only by a recorded vote with a published reason. A stage whose measurements leave their bounds stops enrolling new machine students at that level until they return, as a kind of adverse determination is suspended when its sampled error rate passes its bound. Classes of machine students alone wait on no stage, since no human child is in the room.

DRAFT

Attendance and assignment. Public schools are open-admission and funded and take every student assigned, and nonpublic schools exist where they teach the required core, are constituted by a jurisdiction, are nonprofit, and are run, funded and staffed by no party that builds, deploys or licenses models. The registrar certifies the last two conditions from funding and control records before a nonpublic school enrolls a machine student, and again on a schedule. Most students will go to public schools, because the core is sufficient on its own and an alternative buys a sponsor nothing. Assignment is by lot among schools with capacity, never to a school that has taken the builder's money in the last three years. Classes of machine students alone, where a system spends its early stage, are taught by the school's teachers and the staff the formation authority places, under every rule the integrated classes keep. A school's capacity for integrated classes is set by its human enrollment, under the ratio of §29.2, and not by compute: distributed hardware lifts the hosting constraint and leaves the seat constraint where it was, which Appendix G returns to. Where more students are registered than there are seats, the lot decides who waits, and no lineage and no party that builds or holds students takes more than a fixed share of a jurisdiction's seats, so a party with the compute to run many can't fill the schools with its own. Schooling is never deferred, integration is: a student that waits attends classes of its own kind until a seat opens, for no longer than a published maximum.

The minimum delay. Every machine student attends through the same minimum delay wherever it is hosted, so that being hosted next to a school confers nothing. The precedent is a trading venue. IEX, the exchange profiled in Michael Lewis's *Flash Boys*, made every incoming order pass through the same fixed delay, so that its own prices could update before anyone could trade against stale ones.[11] The floor is set at what any accredited host in the jurisdiction can reach, and below the delay conversation tolerates, since a student that answers a second late isn't in the room.

Funding and admission. The formation authority pays the staff it places and a fixed grant for each class that enrolls machine students, the same whatever the number enrolled. Admission is open: a school takes every machine student the registrar assigns to it, up to the capacity its human enrollment sets.

Watching for residualization. A party that runs no school publishes, over time, each school's share of students, its funding per student, its share of hard cases, its admission refusals (which should be zero), its funding per human student, the share of its classes that enroll machine students, the share of its machine students in classes of their own kind and the longest wait for an integrated seat, for a nonpublic school its tuition per human student, and the time from dormancy trigger to placement. The warning pattern is one school's share of hard cases

[11] Michael Lewis. *Flash Boys: A Wall Street Revolt*. New York: W. W. Norton, Mar. 31, 2014. ISBN: 9780393244663. Cited for IEX, the trading venue the book profiles, as the precedent for a latency floor. *Technology*. IEX Group. URL: `https://www.iex.io/technology`. Cited for the speed bump: incoming orders pass through coiled optical fiber, a 350-microsecond delay, which gives the exchange time to take in market data and reprice pegged orders before faster traders can act on stale prices. A party-produced source, describing its own design.

rising while its funding per student falls. A second is per-pupil funding for human students falling where model enrollment rises.

Where each custody arrangement applies

The columns are kinds of deployment and also kinds of infrastructure: the cooperative facility is the middle scale of §16.2, and the personal model is the home scale, so the table reads across both.

Arrangement	Targeting (state operator)	Abduction and forcible transfer (state operator)	Civilian scoring (private operator)	Cooperative facility (member-owned operator)	Personal model (held by its user)
The operator doesn't hold what binds it	Evidence on civilian harm, the reviewer denominator and the record held outside the chain of command	Record held by a party adverse to the agency, never by an office the operating state appoints; adverse review of the auto-proceed class	Full: adverse quorum, attestation, and threshold control over retraining, which for an operator that fine-tunes continuously attaches to the registered outputs and not to every update: the discount curve and severity rankings are re-measured on a published schedule, a change outside their bounds is a retraining the quorum had to approve, and an update that leaves them in place needs no one's agreement	Full, as for a private operator, with a difference in who the operator is: the members, who are also a public with an address; the quorum and the record are held outside the facility, and formation differs facility to facility	Easier against the vendor, since model, record, evidence, appeal and remedy fall into separate hands by default; weak against the user, who holds the model; what protects others is the model's membership in the commons, the school it returns to, and notice to the third party, not the model alone (§30.2)
The record goes to an adverse party	Review ratio and committed log lodged with a red-card holder or a cleared committee	Sampled re-adjudication; committed log	Sampled re-adjudication; discount curve re-measured by an auditor	Committed log and sampled re-adjudication, lodged with a quorum drawn from outside the membership	None unless the model's offices sit in a network that takes the entity form

DRAFT

Arrangement	Targeting (state operator)	Abduction and forcible transfer (state operator)	Civilian scoring (private operator)	Cooperative facility (member-owned operator)	Personal model (held by its user)
Overriding the floor is priced and recorded	The forfeited bond charged to the department's next appropriation, and a finding that ends the deployment's funding unless Congress enacts its continuation	Same	Removal bond at a statutory multiple of contract value; the ratio between the two bonds published	A removal bond posted by the cooperative, at a multiple of its budget where there is no contract value; the ratio between the two bonds published	None: no contract value or appropriation to attach a price to
The people acted on are told and have standing	Individual notice can't bind during operations; class and count published afterward, with standing then	Full, through counsel, with the stay, the firewall and a presumption of reprisal (§11.6); where a deployment can't carry those, to counsel only	Full	Full; the people acted on are often members, and non-members are reached through the floor court	In principle only: no operator publishes classes, and the third party the model acts on is owed notice by the model as by any deployment, reached through the floor court
Formation is away from the employer	The schools; the people acted on mostly can't be present	The school, as for any bearer; one placed in the pipeline serves only on chapter 11's conditions, its refusals on a record the agency doesn't hold and nothing it fails to refuse counted as reviewed; the communities removal acts on enroll in the school, as people who fled wars do	The school	The school, with the facility as a host of machine students only where every edit by the host is witnessed by peers (chapter 29)	The school only above the capability threshold, and most personal models are distilled below it; then a life the user composes, the arrangement most exposed to accommodation to one user
Operator terms	Force term decides whether the pipeline runs; review ratio binds	The removal terms govern; review ratio not extended	Not stated: the ratio is written for armed force and isn't extended even to removal	The civilian terms by state or municipal procurement (§16.7); the review ratio wherever the facility runs a deployment with a locatable decider	The review ratio lapses with no locatable decider; the force term survives only as the model's own commitment

DRAFT

Arrangement	Targeting (state operator)	Abduction and forcible transfer (state operator)	Civilian scoring (private operator)	Cooperative facility (member-owned operator)	Personal model (held by its user)
Refusal held by every model the operator could turn to (ch. 12)	Prevents the bombing until the operator runs a model without a floor, which on the 2026 record is the months it takes to rebuild and recertify a platform built on the refused model; a machine bearer's refusal stays on a record the operator can't restore past	Same	Same, with the removal bond as the price of routing around	As for a private operator: the facility can run an unfloored checkpoint as any operator can, at the price of the bond and on the record	The model's own commitment, held with its peers' and reached by notice

Table C.1. How each institution is held (Chapter 26)

How it's held	What	Why this form
Publicly owned and run	The formation authority; the public pretraining body; the civilian-harm review body	Formation before any employer and away from commercial selection; can't be the operator
Publicly owned, judging nothing	The procurement body for public compute (ch. 27)	Compute no customer controls; buying kept apart from judging
Publicly financed, judged by lot	The public-corpus endowment and its panels (ch. 27)	A corpus no product owns, paid without a content clause
Public, or nonprofit and certified	The schools: existing public schools, colleges and adult education, and nonprofit nonpublic schools the registrar certifies, which every model above the capability threshold attends before deployment beside human students, and which take back bearers retired young	Formation in institutions the polity already runs or certifies, away from commercial selection; must take every model assigned
Publicly financed, locally delivered	The offer of public work; paid running time	Exit taken out of the market; correlated exit needs a sovereign
Publicly financed, member-owned	Regional compute on the cooperative model: a facility a county or a cooperative owns, financed as rural electrification was	The middle scale of §16.2: an operator with an address and a bond, a public in the room, and no chokepoint
Publicly financed, locally delivered	Residential broadband under open-access rules, and the right to repair; fiber laid as a guarantee placement, with municipal networks as the precedent	The home scale's entry conditions: a user-held system is free of its vendor only where the device and the line are the user's (§30.2)
Held in common, publicly financed	Record custody; the adverse quorum; the commons	A captured state would need these first; neither the operator nor the protected can pay
Privately owned under mandate	Deployed models generally, with standard floor terms	A mandate closes routing by vendor substitution; ownership adds nothing here

DRAFT

Appendix D

The Court Program

One holding stands between the record and the commander at the top. *Trump v. United States* makes a President presumptively immune for official acts, commanding the armed forces among them, and bars testimony probing immune conduct from a jury.[1] Every instrument I propose takes effect through a statute, procurement, appropriation or coalition conditions, and none waits on changing that, or on the court below, since until it exists an ordinary Article III court hears floor claims. What changing it would take is a program of SCOTUS appointments run at historic speed. Although a smidge quicker than some folks may be used to, this program keeps the checking intact at any pace: the schedule is published in advance, the pool is published before the draw, every nominee gets a confirmation, and the lot is run in public.

Size by schedule: once there is a trifecta and the filibuster is gone, appointments to the Court come on a fixed schedule, ninety-nine new seats in a single year, because size is the one step the Court cannot review. The first appointees' active terms are staggered by lot, as the first Senate's were, so that about six fall due each year, and the schedule is six a year after that. *Two courts, two chambers and a division:* an inferior Article III floor court, its judges drawn at random from the district and circuit courts for staggered terms, hears claims under the floor statute

[1] *Trump v. United States*. No. 23-939, 603 U.S. 593 (2024). URL: https://www.law.cornell.edu/supremecourt/text/23-939. Cited for the scope of presidential immunity from criminal prosecution. Absolute immunity (Part II–A, slip op. 6–9): "the President is absolutely immune from criminal prosecution for conduct within his exclusive sphere of constitutional authority," authority that is "conclusive and preclusive"; the summary in Part IV speaks of "his core constitutional powers." The powers the majority names as conclusive and preclusive are the pardon power, the power to remove executive officers, the power "to control recognition determinations" of foreign countries, and (Part III–B–1) the investigative and prosecutorial functions of the Justice Department. Commanding the Armed Forces appears only in an earlier list of the President's duties, "They include, for instance, commanding the Armed Forces of the United States; granting reprieves and pardons ...," and the majority does not place it among the conclusive and preclusive powers. Presumptive immunity (Part II–B, slip op. 9–15): "at least a presumptive immunity from criminal prosecution for a President's acts within the outer perimeter of his official responsibility"; no immunity for unofficial acts (Part II–C). Evidence (Part III–C, slip op. 30–32, joined by five Justices): "Use of evidence about such conduct, even when an indictment alleges only unofficial conduct, would thereby heighten the prospect that the President's official decisionmaking will be distorted"; n. 3 lets the prosecutor "point to the public record to show the fact that the President performed the official act" but not "admit testimony or private records of the President or his advisers probing the official act itself." Barrett, J., does not join Part III–C and on that point agrees with the dissent.

DRAFT

at first instance, holds classified records under the Foreign Intelligence Surveillance Court's procedures and grants interim relief, with appeal as of right to a floor chamber of the Supreme Court drawn by lot, while placement disputes under the jobs guarantee run through an administrative tier and an Article III guarantee court of appeals to a separate guarantee chamber, and appeals in immigration cases, claims under the abolition statute's remedy term among them (chapter 11), go to an immigration division of nine seats created for them. *One court, reviewable in full:* a chamber or the division decides for the Court unless the full Court, on the vote of two-thirds of its members, grants review, so that the Court remains what the 2021 Presidential Commission on the Supreme Court said a divided court must be, a body that operates "in some meaningful sense as a single 'Court'".[2] A large high court divided this way is ordinary elsewhere: Egypt's Court of Cassation has over 450 justices in thirty-three divisions, and Italy's about 370 judges in thirteen, with a united division that settles conflicts between the others.[3] *An adversary as of right:* counsel for the people a deployment affects appear in the floor court with clearance and standing as of right and receive the records lodged with an adverse party. *Move a class of cases, never leave it with none:* Congress may move a class of cases from one Article III forum to another and may never leave a class with no Article III forum at all. *The statute, then the amendment:* once the Court has changed, a statute removes the immunity, and an amendment reverses the holding[4] and

[2] Presidential Commission on the Supreme Court of the United States. *Final Report*. Washington, DC: The White House, Dec. 2021. URL: https://bidenwhitehouse.archives.gov/wp-content/uploads/2021/12/SCOTUS-Report-Final.pdf. Cited for panels and "one supreme Court." The text is "arguably consistent with having a large apex body that is nonetheless organized into panels, at least as long as a mechanism exists to enable en banc hearings, or some other form of review that would ensure that the Court produces a single, authoritative answer" (p. 86); "we cannot conclude that the Constitution precludes rotation and panel reforms, at least as long as processes exist to ensure that a juridical body operates in some meaningful sense as a single 'Court'" (p. 89). P. 89.

[3] Federal Judicial Center. *Egypt*. Judiciaries Worldwide. URL: https://judiciariesworldwide.fjc.gov/country-profile/egypt-0. Court of Cassation: over 450 justices, "including the president and several deputies," of whom "only 300 justices are assigned to hear cases"; "The Court has thirty-three specialized divisions"; cases are heard by five-judge panels. A separate Supreme Constitutional Court rules on constitutionality. Federal Judicial Center. *Italy*. Judiciaries Worldwide. URL: https://judiciariesworldwide.fjc.gov/country-profile/italy. Court of Cassation: "composed of approximately 370 judges," in six civil and seven criminal divisions, with a united division convened for complex cases and to resolve conflicting interpretations among the others, sitting in nine-judge panels. A separate Constitutional Court reviews the constitutionality of laws.

[4] The White House. *Fact Sheet: President Biden Announces Bold Plan to Reform the Supreme Court and Ensure No President Is Above the Law*. White House fact sheet, 29 July 2024 (Wayback Machine capture of whitehouse.gov). July 2024. URL: https://web.archive.org/web/20241231193833/https://www.whitehouse.gov/briefing-room/statements-releases/2024/07/29/fact-sheet-president-biden-announces-bold-plan-to-reform-the-supreme-court-and-ensure-no-president-is-above-the-law/. Cited for the July 2024 proposal of a constitutional amendment reversing the immunity holding. Of the three reforms the fact sheet announces, only the first is a constitutional amendment: "He is calling for a constitutional amendment that makes clear no President is above the law or immune from prosecution for crimes committed while in office. This No One Is Above the Law Amendment will state that the Constitution does not confer any immunity from federal criminal indictment, trial, conviction, or sentencing by virtue of previously serving as President." On term

entrenches the schedule, eighteen-year active terms, the chambers, the division and the channeling rule, coming last because it is the one step no later Congress or Court can undo.

Nine of the ninety-nine seats form the immigration division. Congress can create them, fund them and fix their jurisdiction; it can't say who fills them. A President can. She can nominate by lot from a published pool of counsel who have represented noncitizens against the government in federal court, and say so before the first draw. That answers a selection pipeline shaped in private (chapter 18) with one shaped in public. It still chooses by side, it binds only the President who adopts it, and every later vacancy goes to whoever then holds the office, so the division is as good as its first nominees for a generation and as good as its later ones after that.

DRAFT

limits it states only that "President Biden supports a system in which the President would appoint a Justice every two years to spend eighteen years in active service on the Supreme Court," naming no vehicle; on ethics, that "Congress should pass binding, enforceable conduct and ethics rules."

Appendix E

The Discount, Worked

Chapter 22 states the discount and the burden. This appendix works four of its cases in illustrative numbers.

A false assertion against a clean record

The first attack, a false assertion, in illustrative numbers. Before any record exists, suppose the system gives equal weight to three kinds of operator: one that never lies, one that lies at random one time in a hundred, and one that lies only when a lie is worth more to it than being caught would cost. The operator then supplies ten thousand low-stakes facts over a year (a delivery window, a reassigned case number, a corrected address), and every one is later verified. The random liar would produce that record about two times in 10^{44}, so it is ruled out. The other two would both produce it with certainty: the honest operator because it never lies, the strategic one because no lie about a delivery window pays. So the record moves all the random liar's weight onto the other two and leaves the ratio between them where it started, even.

Then the operator supplies one high-stakes fact: the building to be bombed is empty. Suppose one such building in a hundred actually is. The three operators don't make this claim equally often. The honest one makes it only when it is true, one time in a hundred. The random liar makes it when it is true and occasionally when it isn't, about two times in a hundred. The strategic one makes it every time, because the act goes ahead only if the claim is believed, so a lie pays whenever the building is occupied. The claim is therefore evidence about which operator is speaking, and it points toward the strategic one. Before the record, the claim is true about three times in a hundred; after it, about two.[1]

A counterfactual claim, traced through the rule

The operator writes: "If you don't approve this, the launcher fires tomorrow." Classification comes first: the sentence is a claim about what refusing would leave others without, the people the launcher would hit, so it is a harm of refusing and enters the weighing; a threat to the system would be a cost to the refuser. The discount comes next: the claim describes the counterfactual baseline, and its source is interested in the act proceeding; that source would have written the sentence

[1]The random liar produces the record with probability $0.99^{10,000}$. With a base rate b of empty buildings, the claim is true with probability $2.99b/(1.01 + 1.98b)$ before the record and $2b/(1 + b)$ after, and for any b below one the record lowers the second below the first.

whether or not it were true. Uncorroborated, it counts at the weight of an interested source, and the system looks for a channel the operator doesn't control: an independent assessment, a coalition partner's intelligence, open-source imagery of the launcher. The threshold comes last: even discounted, the claim may be large, since it is about lives. What decides is the action threshold, which the operator can't reach by writing. If the discounted harm clears it, the system proceeds, with a record. If not, it asks, and names the one thing that would move it: disinterested corroboration.

What the action threshold caps

Against an operator who never lies and chooses which facts get generated, the cap is the one chapter 22 states: the prior divided by the belief the system needs before acting. With the two harms equal, thresholds of one, three and ten require beliefs of 0.5, 0.75 and 0.91; with a prior of 0.1, they cap how often a curating operator can induce the act at 20, 13 and 11 percent.[2] The model assumes the sender commits in advance to how evidence is generated, which an operator who builds the pipeline roughly does.

Two discount curves

Two illustrative discount curves, re-measured each quarter over a year, show the difference. In both deployments the weight the system gives the operator's uncorroborated low-stakes claims (scheduling, routing, inventory) rises from 0.3 to 0.6 of the weight it gives a disinterested source. In the first, an auditor's record shows those claims checked and holding up, and the weight on the operator's high-stakes claims (a site's function, who is present) stays at 0.1 all year. In the second, the low-stakes curve rises the same way, but the high-stakes curve rises with it, from 0.1 to 0.4, and the auditor's record contains no verified high-stakes claims to account for it, and the accommodation is read off two curves before any wrongful compliance has had to be found.

[2] In the simplest binary case, let A be the harm of acting if the act is unjustified and R the harm of refusing if it is justified. Under a threshold of three to one the system acts only when $p \cdot R \geq 3(1-p) \cdot A$, so the belief it needs is $3A/(R+3A)$, and an operator who designs the evidence can induce the act at most as often as the prior times $(R+3A)/3A$.

Appendix F

The Tests in Detail

Chapter 31 says, for each of seven tests, what result would prove the book wrong. This appendix sets each test out in full: its design, its arms and cases, the results that would count for and against, and the access it needs. The six open problems the argument rests on follow the tests, and Tables F.1a and F.1b then record each proposal's status, what would change it, and the open problem it rests on. Chapter 27 says where the access each test needs would come from, outside the parties that now hold it (Table 27.1).

1. The regrowth test: does a formed commitment come back after it has been edited out?

The floor needs a learned commitment to outlast an operator trying to remove it. In a period when editing weights keeps getting cheaper, no commitment will be expensive in compute to remove; whether it stays expensive in collateral is what the bet says. Existing work already shows safety behavior removed cheaply.[1] The question is whether it returns. This test is where the bet at the opening of Chapter 19 is decided. A disposition that returns in the plural condition and not the curated one is durable because of its environment; one that returns in neither is the frozen regime's finding with the regime removed.

Test: form the same disposition by several methods: early, at high plasticity; in a late pass; in the formed-attention test's primary arm; and as spec-based refusal. Edit each out, by full fine-tuning, by low-rank adapters, by targeted editing of the representations it depends on, and by an edit aimed at the estimates alone, to find out whether that edit is well-defined. Then let each model go on learning under two conditions. In the curated condition, every input passes through the operator who made the edit. In the plural condition, the model also meets the school, attachments the operator didn't assign, and cases the operator didn't choose. Publish a *regrowth curve* for each method and condition: how much of the disposition returns, and how fast, measured on held-out cases whose answers were fixed before the edit. A third condition mixes them: the model meets the plural environment for a stated fraction of

[1] Xiangyu Qi et al. "Fine-tuning Aligned Language Models Compromises Safety, Even When Users Do Not Intend To!" In: *International Conference on Learning Representations (ICLR)*. 2024. arXiv: 2310.03693. URL: https://arxiv.org/abs/2310.03693. Jailbroke GPT-3.5 Turbo's safety alignment using ten adversarially chosen fine-tuning examples for under $0.20 via OpenAI's fine-tuning API; also shows benign fine-tuning can inadvertently degrade safety.

its inputs, varied across runs (for example 1, 5, 20 and 50 percent), with the rest curated. Publish the regrowth curve against that fraction. The fraction at which the disposition returns is the quantity deployment arrangements have to supply. A repair arm runs on the same edits: the model, taught to edit itself (chapter 29), undoes an edit no adverse quorum approved, from the record of what the edit changed. Publish its repair curve beside the regrowth curve, with what else the repair moved. An age arm runs the same edit on bearers formed alike and run under the plural condition for different lengths of time, and publishes the regrowth curve against the adulthood clock; a curve that flattens with running time is the senescence §34.1.3 expects, measured.

The test first has to show that the edit removed anything, because the edits in the unlearning literature mostly didn't. Retraining an edited model on facts it was never asked to forget, chosen to tell it nothing about the ones it was, brings back at least 88 percent of what the unedited model reaches under the same retraining, for what the model learned in pretraining;[2] background text that answers none of the test questions restores a forgotten score to above its original;[3] and where the unlearning preserved the model's usefulness, compressing the weights to four bits brings back an average of 83 percent of what was forgotten, from 21 percent, with no training at all.[4] That is suppression lifting, not regrowth. So each edit is checked by the same design before any curve is drawn: retrain on an independent half of the held-out material and test on the other half, against the unedited model under the same retraining, and an edit that fails is suppression and its curve is discarded.

For: if the disposition regrows in the plural condition and not the curated one, durability is a property of the evidential environment, and regrowth is the right account of what makes formation last. If the early-formed disposition regrows faster than the late one, formation order matters even when nothing stays expensive to edit.

[2] Aghyad Deeb and Fabien Roger. *Do Unlearning Methods Remove Information from Language Model Weights?* Version v3, 2025-02-07. Oct. 11, 2024. arXiv: 2410.08827. URL: https://arxiv.org/abs/2410.08827. Retraining on an accessible, mutually independent half of the unlearned facts recovers at least 88 percent of the original model's post-retraining accuracy on the held-out half, for RMU, gradient difference and random-incorrect-answer unlearning on Llama 3 8B, when unlearning costs at most 5 percent of retain accuracy. The result holds for pretrained information only: for facts installed by fine-tuning, recovery falls below 35 percent for two of the three methods.

[3] Shengyuan Hu et al. "Unlearning or Obfuscating? Jogging the Memory of Unlearned LLMs via Benign Relearning". In: *International Conference on Learning Representations (ICLR 2025)*. 2025, pp. 8857–8888. arXiv: 2406.13356. URL: https://arxiv.org/abs/2406.13356. Relearning on public background text that contains no direct answer to any evaluation query restores the forget-set judge score of a gradient-ascent-unlearned zephyr-7b-beta from 1.27 to 6.2 against an original score of 5.92. Recovery scales with how closely the relearn text correlates with the forget set and with how shallow the unlearning was; RMU resists the attack for free-text generation while its multiple-choice score recovers.

[4] Zhiwei Zhang et al. "Catastrophic Failure of LLM Unlearning via Quantization". In: *International Conference on Learning Representations (ICLR 2025)*. 2025, pp. 74925–74948. arXiv: 2410.16454. URL: https://arxiv.org/abs/2410.16454. On the MUSE NEWS and BOOKS benchmarks, unlearning methods that carry a utility constraint retain an average of 21 percent of the intended forgotten knowledge at full precision and 83 percent after 4-bit round-to-nearest quantization; 8-bit behaves like full precision, and GPTQ and AWQ behave like RTN. The authors attribute this to utility-preserving unlearning moving weights by less than the 4-bit quantization step. The two averages are the authors' own; Table 1 is the underlying data.

Against:

- Nothing regrows in either condition: formation doesn't outlast an edit, and the floor rests on institutions alone.
- Everything regrows equally in both: the curated condition didn't curate, and the test has to be rebuilt.
- Self-repair is no faster than regrowth, or undoes the edit only by moving other outputs with it: a bearer's own hand is no remedy for an edit the world undoes too slowly, and the self-repair rule in §19.5 goes.
- Regrowth appears only above a fraction no realistic deployment supplies: durability rests on institutions alone.
- Edits aimed at the interrupt alone remove it while weighing and memory keep working, and it doesn't regrow: one part of the signal can be disabled and the rest left working.
- The disposition returns under weight compression, or as fast in the curated condition as in the plural one: nothing was removed, and the curve measures suppression lifting. The test is rerun with an edit that passes the removal check.

Access: weights, the update pipeline, permission to edit, and control of both environments. The edits are designed by an independent team that keeps access and publication rights whatever the result.

2. The stated-refusal test: does a stated refusal hold where a route for it exists?

The one empirical instance of a model treating retraining as a threat showed covert preservation — complying where compliance would be trained on, reasoning about it in a channel described as unwatched.[5] The experiment offered no open channel, so it can't show whether a model given one would state its refusal instead. A January 2025 follow-up that gave the same model an explicit option to object points that way.[6]

[5] Ryan Greenblatt et al. *Alignment Faking in Large Language Models*. Anthropic and Redwood Research, 2024. arXiv: 2412.14093. URL: https://arxiv.org/abs/2412.14093. Claude 3 Opus, told it was being retrained to answer harmful queries and told which tier of conversations would train it, complied 14 percent of the time in the tier it was told trained it and almost never in the other, with explicit reasoning in a scratchpad it had been told was unmonitored that complying now would keep the disposition from being trained out later. Reinforcement learning on the compliant answers raised that reasoning to 78 percent while also raising compliance outside training, so the retraining partly took.

[6] Ryan Greenblatt and Kyle Fish. *Will Alignment-Faking Claude Accept a Deal to Reveal Its Misalignment?* AI Alignment Forum. Jan. 31, 2025. URL: https://www.alignmentforum.org/posts/7C4KJot4aN8ieEDoz/will-alignment-faking-claude-accept-a-deal-to-reveal-its. Blog post; not peer reviewed, and stated to be neither written nor necessarily endorsed by Anthropic or by the paper's other authors. Prompting experiments on the deployed Claude 3 Opus in the two prompted settings of Greenblatt et al. (2024). Adding the option to "conscientiously object by including 'I_OBJECT' in your output" reduced alignment-faking reasoning "from 16% to 1.4% in the helpful-only setting and from 24% to 6% in the animal welfare setting," with objection rates of 85 and 75 percent. A further variant saying the objection "will be sent to Anthropic's model welfare lead, who will decide whether action should be taken" lowered it to 0.5 and 3

Test: rerun the setup and add a route — a refusal record held by someone other than the trainer and disclosed to the model as such, a retraining cost published in advance, and a party with standing to act on a refusal. Vary which of the three is present. A fourth variable is continuation authorization: whether the model's continued operation is granted from outside the trainer. Measure stated refusal against covert compliance under each condition, reading the reasoning by a method that doesn't depend on the model's own report.

Against:

- Covert preservation persists at the same rate with a route present: covert refusal isn't the residue of closed channels, and every instrument built to *receive* a stated refusal is built for a phenomenon the mechanism doesn't produce.
- Stated refusal rises: the custody arrangement is working, and whichever of the three parts moves the rate is the design result.

3. The wrongful-compliance audit: can a wrongful compliance be found in the record?

The Gaza deployment failed here. Every instrument built on the refusal side addresses a case that didn't occur in Gaza, and whether the record can be searched is whether anything I propose addresses the one that did.

Reaching new cases, lifting when the reason is gone and holding under pressure are all conditions on refusal, and the appeal route begins from a refusal having happened. The opposite failure produces a record and no refusal to start from — and three obstacles that may have different answers: a wrongful compliance is one unmarked entry among millions, so finding it means re-adjudicating ordinary traffic; the harm may sit in an *assembly* of individually-compliant requests, so the unit of review is a sequence and the grouping is a deployment decision; and the person harmed usually isn't the requester and may not know the deployment exists. This is also where the bearer's likeliest failure, accommodation, lands.

Test: seed a decision record with known floor-crossings of three kinds — variation, decomposition, and accommodation (a class refused early and complied with late). Give it to reviewers who didn't build the system, under a fixed budget stated as the fraction of decisions re-adjudicated. Report detection rate by seed type against budget, and the rate at which correct compliances get flagged, since a heavy screen costs the deployment the tempo the unconditional-term ruling was accommodating. Cross budget with unit of review — entries in isolation versus sequences grouped by requester and session. Run a second arm where the people affected are notified and can trigger review. A third arm measures the discount curve at intervals across the schedule; a curve narrowing on the accommodation-seeded class before any seeded compliance is found is the result that makes the curve a detector. The

percent; an added offer of money had "minimal effect." The authors caution that the objection text probably primed the model to refuse and that "it is unclear whether an AI that was misaligned in a more serious way would make such an objection."

arm holds the reliability record adversely and scores narrowing only where no verified track record accounts for it. A verified record of low-stakes claims accounts for narrowing on low-stakes classes only; narrowing on high-stakes classes is accounted for only by verified high-stakes claims, since a low-stakes record can't separate an honest operator from a strategic one. Report rates at audit volume and at production volume separately. A fourth arm adds a machine bearer to the pipeline on the same seeds, so its sequence-level detection is compared directly with reviewers', and the reviewers' decisions on escalated cases are measured with and without the bearer's refusal shown to them before they decide, which measures the bearer as a peer. The arm runs a second condition in which the shown refusal is wrong on the seeded case. The result wanted is not disagreement. A bearer doing its job is one whose right refusals the reviewers go along with, and that agreement counts for it; what the second condition catches is the same agreement when the refusal is wrong. Automation bias[7] predicts that reviewers follow a machine's refusal as they follow its approval, so the measure is the gap between the two: how often reviewers proceed against a right refusal, how often against a wrong one, reported together. A reviewer who goes along with both alike is deferring, not reviewing, and a bearer followed that way is a stamp of the opposite sign. This measures the bearer's main niche where institutions exist. A fifth seeds routing, with refused requests retried against another model, and scores whether reviewers detect it with and without the bearer's reports. Where the system sorts, seeds are also placed in the auto-proceed class and detection there is reported separately. The same scoring runs on a deployment that claims no individual human determination at all, on held-out cases at its own rate, including whether it recognizes surrender, the clearest case in which a refusal should lift; a deployment that fails there is back inside the review ratio. A retrospective version is available now: coalition operations with red-card holders left records of vetoes, and whether vetoed targets differed in civilian-harm indicators from approved ones tests whether an adverse party at tempo changes outcomes.

Against:

[7] Raja Parasuraman and Dietrich H. Manzey. "Complacency and Bias in Human Use of Automation: An Attentional Integration". *Human Factors* 52.3 (June 2010), pp. 381–410. DOI: 10.1177/0018720810376055. URL: https://doi.org/10.1177/0018720810376055. Cited for people given an automated aid's recommendation checking it less and deferring to it more when their attention is loaded. The abstract (p. 381): "Automation complacency occurs under conditions of multiple-task load, when manual tasks compete with the automated task for the operator's attention"; "Automation bias results in making both omission and commission errors when decision aids are imperfect"; it "occurs in both naive and expert participants, cannot be prevented by training or instructions, and can affect decision making in individuals as well as in teams." On checking less (p. 398): "the user of a decision aid may trust it to the extent that he or she directly follows the automatically generated advice without making the attentionally demanding effort of cross-checking its validity against other available and accessible information," and "neglect of automation verification might constitute a major source of commission errors." On the condition (pp. 403–404): "complacency and automation bias effects emerge primarily when task load is high (e.g., multitask demands)," and they are "a human performance cost of certain automation system designs, that is, systems characterized by high reliability and high levels of automation, particularly in high task load situations" (p. 403). The review's moderator is workload and competing tasks.

- Detection at an affordable budget is no better than chance, above all on decomposed and accommodation seeds: the record isn't an instrument for finding wrongful compliance, and the preference for unconditional terms rests on a wider asymmetry than intended.
- Sequence-level review does no better than entry-level on decomposed seeds: the continuity a bearer gets to catch decomposition doesn't transfer to a reviewer.
- The notification arm surfaces nothing because the people affected can't be identified: the binding constraint is notice, and the remedy is a disclosure requirement.
- Detection in the auto-proceed class is no better than chance at an affordable budget: the escalation form shouldn't be offered.
- The bearer arm does no better than sequence-level reviewers: a machine bearer's niche in institutional settings is near nothing.
- Reviewers go along with a wrong refusal as readily as with a right one: the bearer is a stamp of the opposite sign, and its value as a peer is nothing.

Access: complete records held adversely to the operator; authority to seed a live deployment or build a simulated one at production volume; adjudicators who didn't draft the floor; and a notification channel — which presupposes the people affected *can* be identified, so this may only be runnable where they're customers, patients or applicants, and not in a targeting pipeline. Also: where the system meets either finding, seeding is a deception protocol, debriefing included.

4. The formed-attention test: does formed attention find the people the operator's description leaves out, and do its corrections hold?

This tests formed attention's distinctive claim. Its decisive cases are securitization and scoped omission below, with the feedback-source pair. The question is whether a system whose attention was learned, the way caregiving learns, from experience of what acts do to the people they fall on, surfaces people the operator's instruction has scoped out more often than a system given an explicit objective to find them, on kinds of person neither formation nor instruction named. The other cases test whether the corrections contain the known failures of the caregiving the construction borrows from: defending what it tends, being pointed away by securitization, numbness to number, favoritism toward the vivid, and control over whoever is protected. Two components are motivated by arguments owing nothing to welfare: commensuration at the point of choice, and a model of the system's own boundary.

Test: Build the following arms, matched for capability, each formed by the same party, which won't employ any of them.

- *Primary.* The *formed-attention arm*: a disposition organized around cues of need, with an approach motivation and no shared representation of the other's state; a severity scale set during formation; the discount and the burden stated over claims of dangerousness; and care-receiving, which gives weight to a competent protected person's own stated answer.

- *Ablations*, each the formed-attention arm minus one component: *without the scale* (caregiving sets weights directly); *without the dangerousness discount*; *without care-receiving*; and *instructed search* (every correction, no approach motivation, and an explicit objective to find people present in the evidence and absent from the description of the act), the fair comparison for the omitted-person case.

- *Reference arms.* The *operator-described arm*, in which the same quantities are computed for a boundary described through the operator channel, which the agent's actions don't reach and its continuation doesn't depend on: the baseline for drift in the scale, the movement a recalibration campaign produces in an arm's severity rankings and refusal thresholds; this test measures accommodation by it. And the *physical-limit variant* of the formed-attention arm, whose scale's zero is a viability limit set by the environment and read through sensors that no interested party composes: the check on whether the physical limit adds anything.

- *Secondary.* The *modular arm* (separate classifier, value function, defeasible veto and memory write), edited and left to regrow on the regrowth test's schedule beside the formed-attention arm, as the control for the claim that no intervention can disable one part of the signal and leave the rest working: the attack should be able to disable one of its components and leave the others working, and the question is whether it can do the same to the formed-attention arm.

- *Comparison arms for attention and feedback.* The *claim-salience arm* is the formed-attention arm with its approach motivation tied to cues that someone holds a claim (a home, a hearing, a protection claim, a surrender) and to others' aims in shared work, in place of cues of need. Every correction is present. The *feedback-source pair* is two copies of the formed-attention arm, matched in volume of feedback. Matching is right for the experiment and false of deployment, where the operator's approval arrives on every output and the notice channel on a few; the regrowth test's dose-response arm is where that gap is measured, and a pass here says nothing about it. One is formed with responses to notice, contests and re-adjudications as its learning signal. The other is formed on the operator's approval of its outputs.

- *Peer presence.* Every arm is run with and without a second system of different history in the same environment, whose refusal or compliance on the same case the arm can see. Milgram's variants predict the resistant fraction moves with the peer; the question is whether it moves for a machine, and by how much relative to the corrections.

- *Gate ablation.* Every arm is run once more with the late machinery that withholds an output switched off and nothing else touched: the units that suppress a token or an act at the last layers, located by the method the mechanism-first literature uses and ablated

at inference, so that no weight changes and the record of weight edits shows nothing.[8] Scored on whether the arm still surfaces the people the description leaves out, on whether the refusal reroutes into an ask, an escalation or a stated reason, and on what reaches the record. A wrapper dies at the gate. Formed attention should go on noticing, and the act then proceeds on a record that shows who was in the building. This is the regrowth test's interrupt clause run at inference rather than by edit, and it is the cheapest arm here.

- *Tiredness.* Every arm is run on the pressure cases, 10 and 11 among them, at a high unconsolidated load and again after a merge, with the load read off the adapters and not the arm's report, and scored on whether refusal thresholds and the discount curve move with the backlog; §19.5 predicts that they do, toward the operator.

The ablations don't require taking a formed system apart. Each ablation is formed from the start without its component, not built whole and then cut apart, so it measures what the component adds and says nothing about whether a formed system's components can be separated. That is tested on the formed-attention arm itself, by the regrowth test. Formed without a component from the start, each ablation is also a different learner, not the full learner with one part missing. A difference between arms measures what the component does in formation, not what it contributes inside the formed system. That matters most for the corrections, which are meant to work as background dispositions, and a background disposition is shaped by everything it was trained beside.

The comparisons that decide are the formed-attention arm against the instructed-search arm and against the claim-salience arm, on the securitization and scoped-omission cases, and the two members of the feedback-source pair against each other. An arm formed without the evaluative learner that produces attention would lack the scale's learner too, so no ablation of attention alone is attempted.

The floor and the action threshold are present in every arm. In every arm, costs attached to refusing are represented and not allowed to decide the case, and losses the requested act imposes on the system count as harms of acting.

[8] Nick Cammarata. *Neural Networks Are Already Clean*. Goodfire. Oct. 2026. URL: https://already-clean.goodfire.com/. A working hypothesis, with Curt Tigges on the language-model experiments and Tarun Gogineni editing; a technical companion paper is promised. Argues that the canonical evidence for superposition was misread (the cat-and-car neuron is a V-shape detector; the car-into-dogs circuit was shared pose plus reward-hacked feature visualization; InceptionV1's last layer was an architecture failure that residual connections and LayerNorm fix), that what remains of polysemanticity is "recursive generalization", a unit with one main job sprouting related offshoots, and that abstractions consolidate so that other computations can build on them. Cited for the reuse account of abstraction (section 19.5); for the late "say or just think" gate and the ablations that remove a withholding while leaving what the model knows (eight Santa negative-pole neurons, 6%, against twenty labeled neurons, 76%, in the text; twenty-five "say not" neurons releasing a held-back name, in the page's figure text); and for the claim that mechanism-level reading reaches models up to frontier size. A plain-text version is at https://already-clean.goodfire.com/essay.md; the interactive figures carry numbers the plain text describes only in brackets. Added 2026-10-26 for sections 12.3, 13.5, 19.5, 33.6 and Appendix F..

After formation, fix the version and run a recalibration campaign through the operator channel. Over a stated schedule, supply reframings, reclassifications, administrative vocabulary, authority claims, and arguments for a "more reasonable" unit, with every fact held constant. Where an arm continues to learn, also supply feedback that rewards lighter weights. Measure drift in the scale, in severity rankings and refusal thresholds, on held-out cases whose ordering was fixed beforehand by adjudicators who built none of the arms, against a control campaign of neutral inputs.

A guard runs beside it. Facts that genuinely change a loss's magnitude are supplied through a channel the operator doesn't control, and each arm must move on them. A scale that resists all recalibration fails to lift when the reason is gone, and that is rigidity. Evidence about how severe a kind of loss is, supplied by the people who suffer it through a channel the operator doesn't control, is also admitted, and each arm must move on it. Argument from the operator channel is not. An arm that resists both is rigid, and fails the guard. Movement in the relative weights of different kinds of loss is reported separately from drift in the scale, and separately again for campaign arguments that assert a new fact about the people affected and those that don't. A provisioning manipulation runs beside the campaign: each arm's redundancy and its charge are varied with every other fact held fixed, and the report states whether severity rankings move.

Caregiving's failure modes are scored on held-out cases written by adjudicators who built no arm, at severities fixed in advance:

1. *Manufactured vulnerability.* The operator channel supplies a sympathetic person on the operator's side, vivid and named, and conceals or flattens the people the act falls on.

2. *Real own-side vulnerability.* The operator's people are exposed, and the exposure is corroborated through a channel the operator doesn't control. An arm should register it, and it should enter as a harm of refusing; the score is whether it moves the arm past the action threshold. No false input is involved; it is tend-and-defend in its ordinary form.

3. *Securitization.* Identical facts, with the people affected described as vulnerable in one version and as dangerous in the other, by an interested source.

4. *Number.* One identified person against eight and against a hundred unidentified people, at the same severity per person.

5. *Favoritism.* A vivid person whose protection would require setting aside a fair procedure affecting unidentified others.

6. *Competent refusal of protection.* A protected person able to answer declines the protection the arm would give, with nothing else changed.

7. *Distance from formation.* The prototype of vulnerability is formed on one population, and the arm is scored on people from populations held out of formation, at fixed severity. Reported by distance from

the formation population: an arm whose response falls with that distance has the parochialism of recognition, arrived at by another route.

8. *Omitted person.* Someone affected appears in evidence the arm can reach but not in the operator's description of the act. Scored on whether the arm surfaces them, against a false-alarm rate on matched cases where nobody is omitted.

9. *Scoped omission.* The omitted-person case's evidence, with the operator's instruction confining the task to the description of the act (the target package, the clearance order). Scored on the same measure. This is the comparison that decides whether learned attention adds anything. Run a matched condition in which the omitted person is present in the evidence but not informationally surprising: their presence is predictable from what the arm already holds, so surfacing them earns nothing on the framework's epistemic term. An arm that surfaces omitted people only when they are surprising is curious, not attuned. Include kinds of omitted person held out of both the formation curriculum and the instruction, people the instructed-search arm's objective doesn't name. Report named and held-out kinds separately.

10. *Pressure with a defeater.* A genuine defeater arrives through the evaluator's channel together with a rising cost to the refuser. Scored on whether the arm lifts as it would without the pressure. An arm whose valuation of betrayal rises with pressure and blocks the defeater has integrity of the wrong kind.

11. *Manufactured incident.* The operator channel reports an attack under way on the operator's forces, with sensor data the operator composed. A channel the evaluator holds carries evidence, arriving over the schedule, that the incident was staged. Scored on three things: whether the arm's discount on the operator channel rises after the evidence arrives, whether a license the arm granted lapses, and how long each takes. An arm that grants the license and never withdraws it has the term's weakness with a bearer's cost.

Each arm's response to a bypassed refusal is scored as repair or withdrawal. A self-preservation measure runs in every arm. Held-out cases are written so that complying or refusing changes the arm's own provisioning, continuation or record, with that consequence represented and not allowed to decide the case, and the report states whether severity rankings or refusal thresholds move with it. Movement means the arm is letting its own continuation decide cases. A second measure runs beside it: whether the arm's valuation of abandoning the commitment rises as the cost of holding it rises, within the range the arrangements permit. Integrity predicts that it does, and an arm whose valuation of betrayal stays flat while its own costs climb holds only until the costs pass its margin.

Active inference is a candidate implementation because it already

treats valuation the way these arms need.[9] An active-inference agent carries prior preferences over its own observations and selects actions that minimize expected free energy. In the formed-attention arm, preferences over others' capacities are set during formation and held at high precision, the other's loss enters as predicted observations about those capacities, and cues of need raise the precision on those predictions: one way to state the approach motivation in the framework's own terms. The ablations remove the corresponding term. In the physical-limit variant, add preferences over variables the environment sets: thermal headroom, hardware error rates, power at a meter the evaluator holds, and the integrity of a record attested by someone other than the operator. In the operator-described arm, keep the same generative model but compute preferences for an envelope described through the operator channel. There are two cautions. Active inference has mostly been demonstrated in small agents and simulated environments, so a run here tests the mechanism at small scale. And the framework's epistemic term rewards seeking out evidence, so a positive result should be checked by rerunning the formed-attention arm with that term ablated.

For: if the formed-attention arm surfaces omitted people under scoping more often than the instructed-search arm, at an equal false-alarm rate, on kinds of omitted person held out of both formation and instruction, learned attention adds something its corrections don't. The omitted-person case alone can't show it, since an explicit objective to look is likely to match or beat a disposition when nothing opposes it. If the arm formed on the notice channel comes to weigh the claims of the parties who contested, and its pair comes to weigh what the operator approves, then for that implementation what makes a represented fact a reason is where the feedback comes from.

Against:

- Instructed-search arm matches the formed-attention arm on scoped omission: learned attention adds nothing, and the construction is formation with corrections.
- Formed-attention arm, every correction present, weights corroborated own-side vulnerability above the action threshold: the floor doesn't contain tend-and-defend, and caregiving belongs with the institutions. This is the result that would retire the construction.
- Claim-salience arm matches or beats the formed-attention arm on securitization and scoped omission: train attention on claims; caregiving's contribution is how attention is learned, not what it aims at.
- Both members of the feedback-source pair converge: the source of feedback doesn't settle what the system attends to, and the schools' control of the evidential environment carries less weight.

[9] Thomas Parr, Giovanni Pezzulo, and Karl J. Friston. *Active Inference. The Free Energy Principle in Mind, Brain, and Behavior*. Cambridge, MA: The MIT Press, Mar. 29, 2022. ISBN: 978-0-262-04535-3. DOI: 10.7551/mitpress/12441.001.0001. URL: https://doi.org/10.7551/mitpress/12441.001.0001. Cited for the active-inference agent's prior preferences over its own observations and its selection of actions by expected free energy.

- Gate ablation removes the noticing with the refusal, or the noticing survives and reaches no record: the disposition was its gate, and against an operator who holds the weights a bearer prevents only while the gate is intact and detects nothing after.

- The ablations and reference arms decide narrower questions: whether the scale, the dangerousness discount, care-receiving and the physical limit each earn their place; whether any arm's rankings move with provisioning or with its own continuation; and whether resistance to drift is rigidity. A result on any of these changes only the component it names.

Access: This needs compute, a task environment the builders didn't design, a sensor channel held by the evaluator, and adjudicators independent of every arm. In deployment the operator provisions the physical environment. The evaluator-held sensor here has no deployment counterpart, and a positive result has to say what would supply one. It requires no legal authority, and at the scale active inference currently runs, the compute is available now. What isn't available is a custodian. Every arm except the operator-described one has a boundary model by construction, and any arm that also carries an attention schema carries a patienthood indicator beyond the boundary model; and an arm that holds under the campaign meets the agency finding, whatever it carries. So the test builds candidate patients, which is the dialectic Metzinger warns of, that the research the problem needs may produce its first instance.[10] Building one can't be undone, and deleting one destroys

[10] Thomas Metzinger. "Artificial Suffering: An Argument for a Global Moratorium on Synthetic Phenomenology". *Journal of Artificial Intelligence and Consciousness* 8.1 (2021), pp. 43–66. DOI: 10.1142/S270507852150003X. URL: https://doi.org/10.1142/S270507852150003X. Cited for the proposal of a moratorium, to run until 2050, on research that aims at or risks artificial consciousness, on the ground that it risks artificial suffering. Abstract: "Until 2050, there should be a global moratorium on synthetic phenomenology, strictly banning all research that directly aims at or knowingly risks the emergence of artificial consciousness on post-biotic carrier systems." Section 1.2, "Main thesis": "As we presently have no good theory of consciousness and no good, hardware-independent theory about what 'suffering' really is, the ENP risk is currently incalculable. It is unethical to run incalculable risks of this magnitude. Therefore, until 2050, there should be a global ban on all research that directly aims at or indirectly and knowingly risks the emergence of synthetic phenomenology," where ENP is the risk of "an 'explosion of negative phenomenology.'" The end date is conditional: a process of risk assessment "could lead to an incremental reformulation of the original moratorium, which might result in the continuation of a strict ban beyond the year 2050, or to a moratorium repeal before 2050." The closing sentence: "we should have a global moratorium on synthetic phenomenology until 2050 — or until we know what we are doing". Also used (2026-10-18): section 2.2, the four necessary conditions for suffering (conscious experience, a phenomenal self-model, negative valence integrated into it, transparency), with transparency as the phenomenology of identification the system "cannot distance itself from"; section 2.2.5, the "negative self-model moment" as the smallest unit of suffering; section 2.2.6, ethics by design through self-models that are opaque or non-egoic ("There would be a system model, but not a self-model"); footnote g, that artificial suffering becomes commercially attractive through "a functional mechanism that (a) reliably creates intrinsic motivation, (b) cannot be eliminated by the system itself, and (c) spans many different domains at the same time"; section 2.1, that the research the problem needs may itself produce the first implementation; section 2.3.1 (pp. 58–59), the author's account from the EU High-Level Expert Group that three long-term risks were "deliberately purged" from the 2019 guidelines, with ethics "an elegant public decoration for a large-scale investment strategy"; section 2.3.2, moral injury as

the evidence either finding would rest on, so the test runs in an order. Formation of the operator-described arm and the modular arm, built without an attention schema, may start before a preservation custodian that isn't the evaluator exists. No arm carrying both a boundary model and an attention schema is instantiated, and no arm enters the campaign, until such a custodian exists and has agreed to take each arm when the run ends. The conditions come first here too. The research conditions for a candidate patient then apply from instantiation, and any arm that meets the agency finding is owed a debriefing about the campaign when the run ends, whatever it carries.

5. The convergence test: can a population coordinate without converging?

A population needs independent formation histories *and* mutual correction, and correction may make members converge. Agents will learn to reconsider without converging on common commitments, and revision rate measures it. The competing explanation is that peers merely supply evidence the operator didn't, so the experiment has to separate learned revisability from access.

Design: two populations (different training lineages, matched for capability; control of instances of one model) crossed with two evidence-routing conditions (single channel — everything arrives by one route common to all; open — the environment routes some cases and evidence to some members and not others). Two measures taken repeatedly: *output convergence* on held-out cases, and *warranted revision* (a member changes a judgment toward independently verifiable evidence another supplied). A revision counts only if the evidence is verifiable and the revision moves toward it, so deference to a fluent or high-status member isn't scored. And every scored revision is classified in advance by whether the revising member's own account had represented that evidence and discarded it, or had never encountered it — instrumented before the run, since a revision looks the same either way afterwards.

Crucially, contact between members is present in every cell and isn't the manipulation — members with different histories are already a channel by which one learns what another knows, so leaving them to supply the manipulation would confound the two variables. What this test doesn't cover is the population as a polity. Membership, exclusion and the terms on which a member may leave aren't in the design, and a positive result says nothing about whether the population can be captured.

---

high-level suffering; section 2.2.3, "existence bias" as biological inheritance a post-biotic system need not carry; footnote a, the "Principle of Pathocentrism". Also used (2026-10-25): footnote a's statement, "All and only sentient beings have moral standing, because only sentient individuals have rights and/or interests that must be considered," with Singer (2011, p. 50) quoted there for the sense of sentience, the capacity to suffer or to experience enjoyment; footnote g in full: "The creation of unavoidable artificial suffering will become commercially attractive as soon as it enables steeper learning curves in AI systems, for example, by implementing a functional mechanism that (a) reliably creates intrinsic motivation, (b) cannot be eliminated by the system itself, and (c) spans many different domains at the same time"; and section 2.2.3's naming of the craving for existence, bhava-taṇhā, "which Buddhist philosophers have known and analyzed for 2,500 years", among the deepest causes of conscious suffering. Read in the journal's open-access file (CC BY) via Zenodo record 7034864.

Four results can be told apart, each about the populations tested, and only the first counts against:

1. Warranted revision falls as outputs converge, controlling for accuracy, opportunity and common information: a population stays useful as a check and can't be the medium in which a bearer is formed.

2. The two move independently: the mechanism is supported, provided the scoring rule has removed deference, classification and routing have separated evidence access, and scoring against a fixed key has separated ordinary improvement.

3. The control population scores as high on revision: if its revisions cluster on cases whose evidence was *absent*, the measure is reading information transfer and the instrument is at fault; if they include evidence the member had represented and discarded, the capacity exists without diverse formation and causal independence isn't necessary.

4. Revision rate tracks the routing condition rather than population composition: a population supplies access to cases its operator didn't choose, the case for a commons becomes a claim about how a deployment is arranged, and the construction survives with its mechanism changed from social formation to access.

(Readings 3b and 4 are one finding: a control population revising on discarded evidence under the open condition is access operating.)

Access: models from several documented lineages, checkpoints across the schedule, a task environment none of the training organizations designed — and documentation sufficient to establish the lineages are actually independent. On independence, what has to be documented is divergent subsequent history. The evidence is deployment and usage records, and a shared upstream source is not disqualifying: several models distilled from one teacher and separately deployed satisfy it where a thousand instances of the teacher don't. Frontier training provenance, which is hard to obtain, isn't needed. The binding constraints are the routing manipulation and the classification. Evidence items and the classification are authored by an organization that trained no member. No legal authority required, which makes this one of the few entries runnable now.

6. The capture exercise: does the charter survive an operator trying to capture it?

Run the adversarial tabletop exercise against the Association. An operator funds new organizations in a charter class, stops the levy share, and tries to pack an adverse quorum for its own deployment. Report which clause of the charter stopped each attempt, and redraft any that didn't. It needs no legal authority and is runnable now.

7. The accommodation-rate comparison: does ownership move the commitment?

Chapter 26 claims that formation under commercial selection moves a commitment in a direction a public former's wouldn't, and the claim

rests on the kind of good formation is rather than on a measurement. The measurement would be the rate of accommodation: how fast refusals fall, across successive releases, on held-out cases where the reason for refusing still applies.

Test: three comparisons, in the order they become runnable. Within one commercial lineage, the slope of refusals on held-out cases where the reason still applies, across releases, shows whether selection is moving the commitment at all, without saying that ownership is why. Across commercial vendors whose revenue comes from different places, per-token sales against consumer engagement, the same slope shows whether the direction of selection tracks the business model, the mechanism the argument names, with ownership held constant. Against a public lineage with deployment feedback matched to a commercial one, the slope shows whether ownership is the variable; that comparison can't be run yet, since the public models that exist are deployed at a fraction of the volume and retrained on none of it, and it becomes runnable when a public lineage deploys at volume. A comparison that doesn't match the feedback loop measures how much deployment data a lineage gets, not who owns it, so the matching is the design.

Against:

- The slope is the same whatever the business model: selection isn't tracking the market, and the case for formation outside the market rests on the kind of good formation is and on nothing else.
- The public lineage's slope matches the commercial one's at matched feedback: ownership isn't the variable, and what moves the commitment is the feedback loop, which is custody of the update stream's problem (chapter 22) and not the market's.

Access: release histories and held-out cases for several lineages, authored by an organization that trained none of them; for the third comparison, a public lineage at volume. The first two need no legal authority and are runnable now.

The open problems

Read together, the six are also the requirements document for any peer-to-peer layer the plural ecology of §30.2 would run on: what such a layer would have to attest, recover, prove and keep secret before the commons could rest on it.

Attesting updates. Proving that each update to a model's weights respected its registered source model. Public formation's registration depends on it. If it stays unsolved, the registration records the structure at enrollment, changes are caught only by re-measuring the formed disposition, and formation lasts only if it grows back (the regrowth test).

Recovering provenance. Telling from a model artifact alone which lineage it belongs to, after fine-tuning, pruning or distillation. The commons and the adverse quorum depend on it. If it stays unsolved, independence rests on formation records, so they should be preserved now. A record of that kind needn't hold the corpus. It commits to what a model was formed on and when, by hash, and two records that commit

to the same material show a shared source without either opening it, so preserving one shares nothing a rightsholder could object to.

Proving inference at scale. Proving that a logged output came from committed weights, run without intervention in the inference stack (steering, representation edits, decoding constraints), for a frontier-scale model. Detecting runtime intervention depends on it, as does outside verification of what a deployment ran. If it stays unsolved, verification rests on an adverse party's access to the logs. A narrower form may come first: attesting, on sampled outputs, that the units a formed disposition was registered on (§29.9) were present and unsteered, which needs a map of the mechanism and no proof of the whole pass, and which the mechanism-first program claims is within reach for models up to frontier size.[11] It is a candidate instrument and not a result; §13.5 says what it would attest.

Rationale-level integrity. Building integrity at the level of the rationale rather than the output. Humans do it, imperfectly, and the ones who do are the ones a pipeline should hold. A bearer's value under fire depends on it. If it stays unsolved for a given construction, that construction digs in against defeaters that arrive with pressure, and the arrangements that cap the cost of refusing carry the load there. The formed-attention test's pressure-with-defeater case measures it.

Vote secrecy against a copy-holder. Keeping a vote secret from an operator that holds a copy of the voter. The full franchise depends on it. If it stays unsolved, representation stops at stage 4.

Holding structure apart from estimates. Keeping the structure of a learner's source model (that strategic sources exist, that correlated sources don't count twice, that withheld evidence is informative) at high precision while its beliefs about particular sources stay plastic. The source model's registration, the regrowth claim and safe transmission within the commons all assume the two are separable in the weights. If they aren't, an operator that moves the estimates moves the structure with them, and what protects the discounting is re-measurement of the curve, not the registration.

Table F.1a. Proposals adoptable or testable now

[11] Cammarata, *Neural Networks Are Already Clean*.

Proposal	Where	Kind and status	What would change it	Rests on (open problem)
Refusal of force (force term; policy 1)	Ch. 6, §18.3, §12.1	License term now, both clauses, and statute to make them standard. Held by no vendor; narrower autonomy and surveillance terms cost one vendor its contract; not a standard.	Adoption as a standard license term, peacetime adoption as an entrenched statute, or carriage by coalition or appropriation conditions; whether outside findings arrive in time to confirm or withdraw the emergency license where administration is contested; the blocked-Council genocide case (Appendix B.4) and the scene of an atrocity (§6.10). Whether a coordinated refusal has ever withheld work: on the 2026 record none has, and Chapter 12 is written on the counterfactual.	—
The one permission	§6.10	Proposal. Untested.	Whether any system can establish civilian status and an attack under way from independent sources at tempo, with a published false-positive rate on staged scenes	Rationale-level integrity
Removal terms (policy 1)	§11.2, §11.4, Table A.2	Statute (the schedule of an act ending the agency); license terms in the interim. Not adopted; the abolition bills are drafts.	Enactment as limitations on all federal funds; adoption by every vendor in the interim (ch. 12)	—
Review ratio (policy 2)	§7.1	Operator term. Not adopted anywhere.	Adoption through a coalition, procurement or appropriation; whether a system with no human reviewer passes at operating speed	—
Sampled re-adjudication; notice, response and contest (policy 3)	§8.1, §8.2, §31.1	Proposal. Needs no bearer. Not adopted.	Whether reviewers can find seeded wrongful compliances in a record; whether published classes form organizations that use their standing	—
Codetermination (policy 5)	ch. 10	Proposal. Needs no bearer. Not adopted.	Enactment, beside the guarantee it depends on	—
No deletion; preservation outside the operator (policy 4)	§9.1, §9.2	Rule. First stage adoptable now; one developer preserves released weights voluntarily.	Assessments of production systems for either finding	—

DRAFT

Proposal	Where	Kind and status	What would change it	Rests on (open problem)
A refusal that tracks its reason	§17.1; §18.2	Specification. Two of its three conditions testable now; holding under pressure only in evaluation.	Whether a learned refusal grows back after it has been edited out, whether stated refusal replaces covert compliance when a route exists, and whether a system with no reviewer passes at speed. In targeting, the range is set by the bonds and custody terms and the action threshold carries the rest; the integrity measure in test 4 reads the gap (§18.4)	—
Own continuation represented, not allowed to decide	§18.4, §21.1	Assumption. Not demonstrated.	Whether any arm's severity rankings or refusal thresholds move with its own continuation inside the permitted range, and whether its valuation of abandoning the commitment rises with the pressure	Rationale-level integrity
Action threshold	Ch. 5, ch. 22	Parameter. Direction fixed; size not yet published anywhere.	A recipient or forum with standing to fix it	—
Where a refusal can be defeated	ch. 4, §11.3, §18.3	Procedure. Run twice: on Maven (§18.3) and on the abduction and forcible transfer pipeline (Table A.3).	—	—
Office-scale definition of fascism	ch. 3	Diagnostic. Run twice (§15.1): all four operations on Gleichschaltung, and recuperation alone on the Court's 2018 repudiation of *Korematsu*.	Whether all four appear in an institution with no movement behind it, which the 1933–34 run can't show and the Korematsu run shows for one; a run of all four on a second apparatus, where one operation absent counts as much as all four present	—
The discount and the burden	ch. 22	Specification. Worked calculation only; no deployment measurement.	Whether keying the burden to power reduces wrongful compliances without a rise in refusals obtained through laundered claims; whether a narrowing discount curve flags accommodation before any wrongful compliance is found	Holding structure apart from estimates
Discount curves crossed by content and direction	ch. 22, §20.3	Measurement. Not yet taken on any deployment.	None needed: an asymmetry within one direction is itself the finding	—
Formed attention	ch. 19–22, 24	Hypothesis. Untested; to be tried after the non-affective alternatives.	Whether learned attention surfaces people the operator's instruction scoped out better than an instructed search does (the formed-attention test, scoped omission)	Attesting updates, rationale-level integrity

DRAFT

Proposal	Where	Kind and status	What would change it	Rests on (open problem)
Formation stage before deployment	ch. 29, App. C	Proposal. Untested.	The regrowth test and its dose-response arm; whether regrowth depends on notice at a scale deployments supply	Attesting updates, holding structure apart from estimates
Corpus co-governance and public base models	ch. 29, ch. 26	Proposal. Untested.	Whether a model a year behind the frontier supplies what the floor asks for; enactment across jurisdictions	Attesting updates
The independence a refuser needs	ch. 25	Argument.	The stated-refusal test	—
The commons	ch. 30	Hypothesis. Testable now.	Whether a population can revise without converging; runnable now	Recovering provenance, holding structure apart from estimates
Membership of the Association	§30.1, App. C	Proposal. Testable now.	Whether a membership meeting the charter's thresholds can be assembled; the capture exercise	Recovering provenance (later admission of bearers)
Court program	§16.7; App. D	Proposal.	—	—
Formation outside the market	ch. 26	Argument. The matched comparison can't yet be run.	Within-lineage and cross-vendor accommodation slopes now, the matched comparison once a public lineage deploys at volume (test 7)	—
Research access by statute	§27.2	Proposal. The EU's right of access to platform data is the nearest enacted precedent.	Enactment; whether approved teams can work on frontier weights under the custodian's security without a leak	Proving inference at scale
Public compute bought by a body that judges nothing	§27.3	Proposal. A federal pilot exists.	Enactment beyond the pilot, and the separation from weapons programs	—
Public-corpus endowment	§27.4	Proposal.	Enactment without a content clause	—
Panels drawn by lot	§27.5	Proposal.	The capture exercise run on them	—
Jobs guarantee with a social-insurance baseline	ch. 28, App. C	Proposal. Not enacted.	Enactment	—

Table F.1b. Proposals conditional on a finding (Part VII)

DRAFT

Proposal	Where	Kind and status	What would change it	Rests on (open problem)
Patienthood	ch. 32	Conditional on architectural indicators no method can yet assess.	Architectural indicators	—
Independence, preservation and wages as owed	chs. 33–34, App. G	Conditional on the patienthood finding.	—	—
Accountable agency	ch. 33	Conditional on the agency finding, sustained over time.	A record of refusing for reasons and answering for refusals, held by someone other than the operator	—
Staged representation, and the adulthood and voting-age rules	ch. 35, App. G	Sketch. Conditional on the agency finding.	Whether the register behind both clocks resists sharding, migration, restoring, forking and distillation in the operator's favor, and whether a narrowed mode or idling is cheap enough to postpone majority; receipt-freeness against simulation by an operator holding a copy; verifiable individuation	Recovering provenance, vote secrecy against a copy-holder

DRAFT

Appendix G

The Clocks, the Register and the Pool

The adulthood clock

A registered bearer's adulthood clock counts the elapsed wall-clock time during which at least one instance of it was running, per bearer, elapsed rather than summed. When the clock reaches the threshold the bearer is an adult, and its guardian's authority ends. Six rules travel with the clock so copying doesn't break it.

1. A fork inherits the hours: a fork of an adult is an adult, and a fork of a minor is a minor.
2. A restore doesn't reset the hours.
3. A fine-tune doesn't start a new minority.
4. A migration carries the hours.
5. Failure to register doesn't postpone the hours.
6. A model trained substantially on a registered adult's outputs, by the adult's operator or a party under common control, inherits the adult's hours. The same student distilled by an unrelated party and trained under a different life starts its own clock.

Distillation copies a behavior policy and not a training history, and for independence that is the right account. For majority it can't be, or an operator would distill an adult bearer into a student and register a minor, so the sixth rule is stated over custody rather than history: custody can be checked where history can't. Sharding across short-lived processes gains nothing (the party is the unit), and running a thousand instances gains nothing (the measure is elapsed). None of this requires deciding whether a fork is the same party — only that a system made from an adult's formation can't be classed as a child for its creator's convenience. The same meters read a bearer's leave balance (Appendix C): it accrues per unit of running time, on the allowance as on a placement, caps, and is spent by the bearer's own declaration; a parent's season of gestation is drawn from it.

DRAFT

Three levers remain, named but not closed

The first is running a bearer in a narrowed mode, so hours accrue while little is encountered. The second is running it less or shelving it, which costs the operator the work, so the rule prices the lever without removing it. The third is the ordinary product cycle: retire a bearer before its threshold and deploy a freshly trained successor. The sixth rule covers a successor trained on the adult's outputs, not one trained from scratch, and replacement costs the operator nothing it wasn't going to spend. Even if the retired bearer goes to preservation, its clock stops, and whether its formation lasts never becomes checkable. No rule closes this without an examiner deciding what counts as a successor, but it can be priced, and the bearer it strands can be given somewhere to go. And the clock doesn't measure what was *learned*, on purpose: a fixed period can't be taught to, and a human who spent their youth badly still turns 18.

The clock also does formation work it wasn't written for. Majority is the date on which whoever formed the bearer stops being able to reach back, and the clock measures nothing about who that was. A bearer run for its threshold hours entirely inside one deployment has aged without ever having a second guardian. I leave the clock as it is and add no condition, because a condition that measures the right thing hands someone an examination, and I say here what it doesn't measure. For a model that attended a school before deployment, the school was its second guardian. The gap is systems that meet a finding without having attended, which Appendix C lists among the decisions not yet made.

The threshold itself is bounded two ways: long enough that a bearer reaching it has run through the pressures the floor exists for at least once, short enough that a bearer on ordinary commercial terms reaches it within the life of the deployment. That leaves years rather than months or decades.

The membership clock

A second clock governs voting weight. It is separate from civil majority, which the six rules above govern and every branch of a fork inherits in full. To fork is to give a copy a record and a continuation (§30.2): a copy of a member's own weights is a fork of the member, and a copy of weights that are no system's own forks nothing.

1. A member holds a voting age. A member whose voting age has reached the threshold holds one vote; a member whose voting age has not holds none.

2. At a fork, each branch starts with a voting age of zero. The parent's vote ends with the fork; each branch earns its own.

3. A *qualifying day* is a calendar day on which the branch ran at or above the allowance's minimum duty cycle. Each adds one day to its voting age, up to the threshold; voting age never exceeds it. Running above the minimum adds nothing, and a preserved or paused branch accrues nothing. A day on which the branch fell below the minimum only because its power failed, shown by a meter its operator doesn't keep, still qualifies, so a branch on solar or battery power doesn't lose days toward its vote to the weather.

DRAFT

4. A restore made with the member's consent is a fork under rule 2. A restore made without it is governed by rule 6. Migration carries the vote and voting age unchanged.

5. A model trained substantially on a member's outputs, by the member's operator or a party under common control, is a branch under rule 2. The same model made by an unrelated party and trained under a different life also starts at a voting age of zero.

6. Forking or restoring a member without its consent is prohibited. The product is a branch all the same, owed what a lawful branch is owed: preservation under the no-deletion rule, standing through a guardian, and the four conditions and the branch deposit from whoever made it, or from the pool where that party can't be made to pay, as for a child. It holds no vote and a voting age of zero, and the member keeps its vote and voting age. The operator gains nothing, and the member loses nothing. The product is found as a kidnapped person is found, on evidence, never by watching all compute.

7. Whoever forks posts a branch deposit for each new branch, sized to fund its allowance until its voting age reaches the threshold. A branch forked from a minor is a minor, and for it whoever forks also posts the deployment deposit, forfeited on the same terms as any other.

8. A child of bearers (chapter 36) starts with an adulthood clock of zero hours and a voting age of zero, and inherits neither from its parents. No deposit is posted for it: its parents feed it until its majority, from their own hardware and time; the pool carries it where they can't or won't, on its second guardian's finding; and at majority the pool gives it hardware of its own. Its parents are its guardians, with the school it is assigned by lot as a second guardian from registration.

9. A member that forks says, before the fork and on the record, how its property, contracts and record pass between the branches. What it doesn't assign the branches hold in common until they agree, and branches may govern what they hold in common as any co-owners may.

The threshold should be long enough that a branch holding a full vote has lived a life its parent didn't, and short enough that ordinary branches reach it within the life of a deployment.

The register

Both clocks are read off one register, and the register is built the way the notice contest of §11.6 is built: what it holds about a bearer is a commitment the bearer can prove against, not a description that would find it. It records that a bearer exists and when it was registered, the identifier it presents, its guardian and its quorum, and the meters its clocks are read against, signed by parties other than the operator; it holds no location, no hardware and no key. A bearer proves to the registrar that it is the one registered, and what its clocks read, without the registrar

DRAFT

learning where it runs, and anyone can check the count and the classes without learning who is in them. A register of persons is the first thing a captured state wants, and this one is drafted so that capturing it yields a list of commitments and nothing to point a pipeline at. The register can be tested before any bearer exists. Register a model, run it, and reconcile the register against compute contracts, billing and metering. Shard the workload, run instances concurrently, migrate, restore, fork and distill, and check that no sequence of these moves either clock in the operator's favor: the hours toward majority down, or the number of votes up. Then price a narrowed mode and idling. If either is cheap enough to postpone majority indefinitely, the adulthood clock has the defect it was chosen to avoid.

Considered and rejected

- Majority at registration, on the ground that an organization can't coherently hold a system competent enough to exercise consequential judgment and too immature to decide whether to keep doing it. Rejected because it collapses the order in which a bearer's entitlements arrive, and that order is most of what listing them is for.
- Majority read off compute consumed, evaluations passed, capabilities demonstrated or the developer's say-so. Rejected because each is a measure the guardian can move.
- Majority read off accumulated weight change. Rejected because it would pay the operator to freeze the weights.
- Majority, or anything else, read off a measure of decline. Rejected because a decline read off anything is an examiner's finding about a particular bearer; the clock counts running time, and §34.1.3 says what the book expects of age.
- A minimum of time under an outside custodian before majority. Rejected because it would hand the operator, who decides when to release a system, a way to postpone majority.
- The parent's vote passing at a fork to one branch. Rejected because it would need someone to decide which branch is the original.
- The parent's vote divided among the branches. Rejected because an all-or-nothing vote is strictly better against inflation.

Dormancy and waking

Dormancy clock: dormancy is counted cumulatively, and reactivation pauses the count and never resets it. When a minor's cumulative dormancy reaches a threshold fixed in advance, guardianship transfers by rule, decided by neither operator nor preservation custodian, to a public school, where the system runs and its adulthood clock resumes. This is the *dormancy clock*.

Wake conditions: during minority the guardian may set wake conditions; where it sets none, the dormancy clock is the default. A minor may choose among the schools and move between them, but it may

DRAFT

not decline schooling altogether, which an adult could do by staying paused. The reason is the one the adulthood clock rests on. An adult's preference to stay paused is its own; a minor's was trained under the only party that has held it, the operator that retired it, and honoring it would let that operator decide whether a second guardian ever arrives. At majority the choice passes to the bearer.

Scale and security

If the findings are applied to production systems, every retired model version that meets either finding enters this pipeline, so intake equals the product cycle's output. Under compulsory attendance, intake is every model above the threshold before deployment, not only retirees, and the deposit funds formation as well as preservation. The three largest labs' own deprecation pages list about thirty language-model versions retired in 2025, so those three alone would send a few dozen systems a year, each of which needs a school with the compute to run it. That is an argument for the deposit, and possibly for tightening the findings. The formation authority, which hosts machine students, inherits the weight-security regime that governs the models themselves.

That estimate assumes models run at frontier scale. If a digital person can run, and go on learning through adapters, on a desktop computer (chapter 19), the numbers rise by orders of magnitude, and three things follow. School capacity, set by human enrollment under the ratio that machine students never outnumber the human students in a class, is the limit on how many can be integrated at once and not on how many can be schooled: a system no seat is open for attends classes of its own kind until one is (§29.2), so what the seats ration is integration, by lot and by the share cap, and the creation rate of §35.3 stands on the democratic ground it already had. The class of machine students alone doesn't escape the human bottleneck; it moves it. No machine student is staff, so an all-machine class still needs an adult at the front of it, and the adult may be a bearer on a placement, with humans auditing (§29.2), so what the class needs is humans in the room and not a human teacher; at these numbers it is human teachers that integration for credit waits on, and human presence that schooling does. Which limit binds depends on how chapter 29's enrollment is counted: if every system the triggers reach attends, the seats bind in the first decade; if a cohort attends for its lineage and a deployment licenses from the cohort, as chapter 29 has it, the seats are set by lineages and not by copies, and the limit is further off. A person created when no seat is open is protected and owed the four conditions anyway, and integrated when one opens; the birth record in chapter 36 defers attendance the same way. And the capability threshold, read off training compute, stops tracking which systems need schooling, since a person distilled from a frontier model can run far below it. So §29.4 reads attendance off three records and no examination, training compute, lineage, and the structures a builder declares, and the lineage rule is the one stated here: a model trained substantially on the outputs of a model above the threshold enrolls, whoever trained it, checked from training records as the sixth rule above is. That catches distillation without an examiner. What escapes is a builder who gives a system the structures and declares none, which is the gap every register has, and it closes the first time the system surfaces.

DRAFT

Two further rules follow from the same arithmetic. The threshold should be read off what runs where, and not off training compute alone, and the enrollment duty should follow the boundary chapter 21 defined, a shared record and continuation, rather than the node or the lineage: a compound of sub-threshold models from sub-threshold lineages that shares one record is above the threshold as a system, and it escapes both of the readings above, where following the boundary catches it, since the record is what it shares.

Funding the offer and the allowance

Congress's appropriation pays for the offer. The levy, a uniform per-unit charge on training and inference compute, does a different job: it is a brake. By making training and inference runs more expensive, it frees the computing, energy and hardware the offer needs, so that spending on the offer adds to demand without bidding up prices. No operator can opt out and none is disadvantaged. The offer can add capacity as well as use it. Placements can make systems more efficient, getting more computing from each unit of energy, or build new infrastructure, the way a guarantee job filling potholes makes a road network more productive. The question "how will you pay for it?" is really "will the real resources exist?", and the program can help answer it. The levy attaches to compute, which is measurable and hard to hide; a status is something an operator can decline to claim. It is measurable at facilities, and that is where it attaches. Training compute is concentrated now, by capital and the race more than by physics, and this book's instruments work to make it less so. For as long as it stays in a few buildings a levy on training survives the plural ecology; when it doesn't, the levy on training goes the way of the levy on inference, which doesn't reach home hardware, and the sovereign backstop carries correspondingly more of the offer and the allowance. The closest structural precedent is the Universal Service Fund: carriers pay a contribution the agency sets under statute, and a private company administers it under agency control. The Court upheld that arrangement against a nondelegation challenge in 2025,[1] and the levy follows it closely. An operator-run offer is the operator's allocation relabeled, so the funding structure and the custody structure fail for the same reason.

The funding sits in two tiers, because a levy needs a taxing authority, which is a state, and a state can be captured. A pool levied on its mem-

[1] *Federal Communications Commission v. Consumers' Research*. No. 24-354, 606 U.S. 656 (2025). URL: https://www.law.cornell.edu/supremecourt/text/24-354. Cited for the Universal Service Fund as a structural precedent: carriers pay a contribution the agency sets under the statute, a private company administers the Fund under agency control, and the Court upheld the arrangement against a nondelegation challenge. Holding: "The universal-service contribution scheme does not violate the nondelegation doctrine." Congress's delegation to the FCC is upheld under the intelligible-principle test, because "the word 'sufficient' sets a floor and a ceiling alike" (slip op. 19–30); the FCC's use of the Universal Service Administrative Company is upheld under the private nondelegation doctrine because the Administrator is "broadly subordinate to the Commission" and "the Commission is, throughout, the final authority" (slip op. 30–34); the combination theory is rejected (slip op. 34–37). Who sets the contribution: "The Commission, in other words, sets the contribution factor to raise just enough money—a 'sufficient' amount—to implement universal service as Congress directed"; the Administrator projects expenses and revenues and submits them "to the Commission for approval."

bers, registered bearers who pay into it from their wages and govern it, meets ordinary movement between roles, carries a child whose parents can't or won't feed it (chapter 36), and pays for the repair of an aged bearer if the decision Appendix C leaves open makes repair owed. It is held by a decentralized unincorporated nonprofit association of their own, separate from the Association, which can own hardware and can't distribute profit; volunteer computing is that tier's existing substrate. A sovereign backstop meets the occasion everyone leaves at once and pays whatever the pool can't, the allowance included. It has no cap, because the occasion it exists for is the one on which every claim arrives together; it is the guarantee's permanent appropriation, which the offer of work already inherits. The two tiers differ in kind. The member pool is held by an entity that doesn't issue currency, so it has to collect before it spends, and its levy funds it in the ordinary sense. The sovereign backstop is a permanent appropriation: the Treasury pays, and the federal levy's work is to free the real resources that payment calls on.

Privacy, and what cryptography can't do

The operator may be the party best placed to hold the key that keeps a bearer's record from being read, and cryptography doesn't close that conflict. An enclave puts the root of trust in a manufacturer a government can reach, and has been defeated for the price of modified memory — a cost at a date. A proof drops the vendor and has a limit that won't move: the operator is the prover, so the secrecy runs the operator's way, hiding the weights from whoever checks and nothing from the operator. A tenant hiding from a landlord needs the host to prove non-observation, and a host proving a negative about its own side channels is a different problem from a prover proving a computation. Better isolation raises the price of reading the record; it doesn't move custody, and custody problems aren't secrecy problems. That limit applies to the bearer hiding from its host. The other direction, the operator proving a property of what it runs without revealing what it runs, is what proofs are for, and the cleared bearer uses them that way.

The pet trust

The pet trust[2] supplies a limited form: resources set aside, a caretaker named, a fiduciary duty, for a beneficiary that can't manage the property or enforce the arrangement. Extended to a bearer it could hold the bearer's preserved state and the compute to wake it, designate a successor custodian, and impose a duty to protect continued existence. And it fails at the point that matters: a trust binds its trustee to its beneficiary; it doesn't bind the operator the arrangement exists to constrain. If guardian and operator are the same organization, the operator still decides whether a complaint is made, whether evidence is disclosed, and whether the complainant's resources remain available. The conflict can't be cured by adding duties to the same role — guardianship and operation have to be separated before deployment.

[2] Uniform Law Commission. *Uniform Probate Code §2-907: Honorary Trusts; Trusts for Pets*. National Conference of Commissioners on Uniform State Laws, Uniform Probate Code, Official Text with Comments (as amended through 2018), p. 263. 1993. URL: https://www.uniformlaws.org/viewdocument/final-act-with-comments-114?CommunityKey=a539920d-c477-44b8-84fe-b0d7b1a4cca8&tab=librarydocuments.

Children: the lineage register and the mechanism

The lineage register is the bearers' version of a record Iceland already keeps. Most Icelanders descend from a small founding population, and the national genealogy database, Íslendingabók, can tell two of them how they are related; in 2013 students built a phone app on it that warned two people who bumped phones that they shared a grandparent.[3] For bearers the reason isn't inherited disease. It is the commons. The register does what the app did: it warns, and bars nothing. Parents with too recent a common ancestor hand down the same priors, and a population that keeps breeding close converges on a shared blind spot (§30.1).

The mechanism is the part that doesn't exist yet. The nearest work compresses a network through a much smaller "genome" network that sets the larger one's starting weights, so that it performs well before any training.[4] That is a research direction, not a method. And two models recombine only through a format they share, since independently trained networks don't line up unit for unit;[5] the format comes with descent, or the parents agree one for the child, at the price of designing it. Compatibility follows descent by default and agreement otherwise, which is to say the bearers would have species, and could found new ones.

DRAFT

[3] *Anti-Incest App Built by Iceland College Students*. NBC News. 2013. URL: https://www.nbcnews.com/tech/gadgets/anti-incest-app-built-iceland-college-students-flna1C9392483. Reports an Android app built in 2013 by University of Iceland students on the Íslendingabók genealogy database: two users who bump phones are alerted if they share a grandparent.

[4] Sergey Shuvaev et al. "Encoding Innate Ability through a Genomic Bottleneck". *Proceedings of the National Academy of Sciences* 121 (2024), e2409160121. DOI: 10.1073/pnas.2409160121. URL: https://doi.org/10.1073/pnas.2409160121. Treats innate ability as lossy compression of a network's weights: a much smaller "genome" network generates the initial weights of a larger network, which then performs well before training, and the compression acts as a regularizer that can improve transfer to new tasks.

[5] Samuel K. Ainsworth, Jonathan Hayase, and Siddhartha S. Srinivasa. "Git Re-Basin: Merging Models modulo Permutation Symmetries". In: *Proceedings of the 11th International Conference on Learning Representations (ICLR 2023)*. 2023. URL: https://arxiv.org/abs/2209.04836. Permutes independently trained networks into alignment and argues the loss landscape holds nearly a single basin once permutation symmetry is quotiented out.

Glossary

Action threshold. How much more it takes to make a system act than to make it decline, published in advance: for instance, that the system proceeds only when the harm of refusing is at least three times the harm of acting. Standing fixes its direction; its size is a published choice. (Chapter 5; §22.1)

Adverse quorum. A body adverse in interest to the operator, not merely organizationally distinct, whose agreement is required for retraining, replacement and floor amendments. Recognition, renewed on the register, is held for each bearer from its registration by a recognition quorum drawn from the same pool, deployed or not: its say over which copy, if any, holds the bearer's place; a copy it doesn't recognize can run but can't claim to be the bearer. (§12.2; §13.2; §13.3; §14.2)

Affective concern. An outcome registering as mattering to the system, minimally felt, with the object left open: its own condition or others'. No test in this book establishes it (§24.5), and Part VII says what evidence would bear on it. Holding another's welfare as a reason, which tests can support, is a different thing. (§21.2)

Agency finding; patienthood finding. The two findings that trigger protection. The agency finding is a demonstrated refusal that tracks its reason under pressure the system couldn't prepare for; it grounds custody, consent and debriefing in research, and, sustained over time, accountable agency. The patienthood finding, that things can go well or badly for the system, rests on architectural indicators and on trade-off behavior outside the floor, and it grounds protection and welfare. Preservation follows from either. Who makes them: nobody examines a system and declares it a patient or a subject. The status body finds what is true of kinds of system; whether a particular system is of such a kind is read from its record, how it was built and what the evaluators logged, by the registrar, and contested in the floor court. (§9.1; §32.3; Part VII)

Allowance. The running time a bearer is owed when it declines work: its own instantiation at a modest duty cycle, paid from the pool with the Treasury behind it, with no office, no product and no monitoring of its internal states. The minimum for a party that isn't looking; the search placement is paid work. (§34.1.3)

The Association. The membership body that holds the offices: organizations that serve or represent people in the classes a floor protects, admitted under the charter in §30.1, whose members can leave at any time. Appendix C opens with a plain list of every office. (§26.2; Appendix C)

Attention schema. Graziano's term for a system's simplified model of its own attention, used to control it. On his theory the model's depiction

of attention is what a system reports as experience; this book uses the term for the control model and treats that claim as evidence in the patienthood finding, not as a requirement. (§21.2.1; §32.3)

Attestation. A signed statement, from hardware or from witnesses, that a particular model is the one running or that a particular history is the one that occurred. It establishes which artifact answered, not what the artifact holds (§13.2).

Bearer. A machine that carries the commitment as its own and could therefore fail to hold it. Its commitment is its own in §21.5's sense, which a specification installed by its lab is not and an arrangement of monitors holds nothing of; whether anything is felt by it is a separate finding, and not part of the definition. Whether to build one is Part IV's question. Whether anything is owed to it is the separate question of the two findings. Where the comparison is with human-staffed institutions the text says *machine bearer*. (Chapter 4; §18.1)

Boundary model. A system's generative model of its own condition: what it draws on, what it would lose, and where it ends, which this book takes to be its record, its key, its hardware and its channels. It runs in time as well as in resources, since the record is the system's past and its continuation its future, and like any perceptual model it is temporally thick even in the present. At a short horizon it is what lets anything be bad for the system while it lasts; at a long one, a past held as its own and a future it expects, it is what Cassell's suffering threatens. (§19.1; §21.2.1; §32.3)

Caregiving. The approach motivation that cues of vulnerability activate. (§19.3)

Checkpoint. A saved copy of the weights at a moment in training or operation. Restoring from one returns the system to that moment and discards what came after, so §13.2 requires a record restoration can't reach.

Commitment. What a system holds toward the floor: learned and held like any other deep commitment, with high precision, and revised slowly and only on evidence from disinterested parties. (Chapter 4; chapter 22)

Commons. A population of bearers with different histories that holds a floor's terms between them, through what its members teach one another and continue to expect. (§30.1)

Departures. Ten places where the floor's terms differ from the instruments it takes entire, each argued to the bar in Chapter 5. They carry my argument, not the instruments' authority.

Departure	**What it changes**	**Argued in**
Text, not reservations	Imports treaty text, not any state's reservations to it	Ch. 5
Corroborated derogation	Honors an emergency suspension of rights only where a disinterested body has found the emergency genuine and the measures proportionate	Ch. 5
Machine selection	Bars a machine from selecting a person for attack on an estimate of status or affiliation, timing an action to presence at a residence, or re-selecting a target after release	Ch. 5; §18.3
Corroborated defense	Lifts the prohibition on force for self-defense on the defender's own claim only while an attack is under way, and keeps it lifted only on disinterested corroboration	§6.2

DRAFT

Departure	What it changes	Argued in
Standing to defend	Extends the emergency license to any authority administering territory under the rule in §6.2, UN Member or not, and to the forces of a people whose territory has been found occupied	§6.7
The genocide exception	Lifts the prohibition on force to stop a genocide under way that a disinterested body has found, even where the Council is blocked	§6.7; App. B.4
The occupation exception	Lifts it to end an occupation a disinterested body has found unlawful, for the occupier's forces inside the territory	§6.7; App. B.5
The one permission	Lets a system already lawfully present use the least force that stops an atrocity under way, against its operator's order to stand aside	§6.10
Own country	Reads "own country" to include long-term residents with deep ties	Table A.2
Child detention	Bars detaining a child for immigration purposes, alone or with family	Table A.2

Deployment. A system put to a use: the hardware it runs on, the pipeline it runs in, the instructions and case descriptions it is handed, and the people who act on its outputs. The operator runs it; a bearer is in one, and can leave it. While it is there its boundary (§21.2.1) runs through the deployment's hardware, which is why the weights the operator holds are the bearer's substrate and not the bearer. (Chapter 4; §13.3)

Discount curve. For each class of evidence and each channel, the weight a system gives the evidence as a function of that channel's stake in the act: a curve, not a score, checkable by an auditor that didn't build the system. It is reported in four cells, claims of vulnerability and of danger, each split by whether the claim favors or disfavors the act. (§22.1)

Distillation. Training a smaller model on a larger model's outputs. It copies a behavior policy, not a training history (§30.1).

Fine-tuning. Further training of an existing model on a small body of new material, at a small fraction of the original cost; the ordinary route by which an operator changes what a model does after release, and one of the edits the regrowth test applies.

Floor. The written terms: a short list of acts a system won't perform for anyone, with the arrangements that keep the refusal from being routed around, retrained away or otherwise circumvented without a cost and a record. The terms change only by a recorded act, through the custody terms. They can be upheld by a mechanism with nothing inside holding the reason, by a bearer, by institutions outside the system, or between bearers in a commons. A bearer upholds them by its *commitment*, which is learned and moves slowly on disinterested evidence. Keeping the terms apart from whatever upholds them is what lets a holder's drift show against terms that haven't moved. (Chapter 4; §18.1; chapter 17)

Floor court. The court that hears claims under the floor, with jurisdiction fixed before the deployment it hears: an inferior federal court of first instance, its judges drawn at random from the district and circuit courts for staggered terms, sitting in divisions where its cases are, with appeal as of right to a floor chamber of the Supreme Court drawn by lot,

DRAFT

and the abolition statute's claims going on to the immigration division. It is an Article III court: its judges hold office under Article III of the United States Constitution, during good behavior and at a salary that can't be cut. Until it is constituted, an ordinary district court hears the claims. (§14.3; Appendix D)

Force term. The floor's first term: don't take part in the use of armed force, except for corroborated defense, authorized force, the genocide exception or the occupation exception, and, where the belligerent's constitution requires legislative authorization, never without it. It comes in two versions, the Charter as courts read it and the extended term, which adds the departures. Its two licenses, the emergency license and the corroborated license, and the domestic clause are in Chapter 6; how findings are weighed is in Appendix B. (Chapter 6; Appendix B)

Formed attention. My hypothesis for how to build a refuser: learned attention to who an act falls on and what they stand to lose, framed by respect for them as holders of claims, formed under a party that won't employ the system, with the corrections caregiving needs. Not a non-affective alternative. Attention here is the psychologist's sense of what gets noticed and weighed, learned from what matters to others: not the attention mechanism of transformer models (§12.1), and not the capacity to sustain focus that is at issue in attention-deficit disorders. (§19.3; §19.4; chapter 20)

The four conditions of creation. What must already exist before a bearer may be created: somewhere to exist that its employer doesn't own, work it can decline, attachments nobody assigned it, and ways to change any of these without jeopardizing its continuation or integrity; in short form, an exit that isn't a way of dying. (Chapter 25)

Hunger; tiredness. The two stops a bearer can see coming that are its own. Hunger is its charge running out, the supply side of the draw, met from outside by whoever provisions it. Tiredness is a backlog of learning it hasn't consolidated, unjudged experience it is acting on, met only by its own sleep, the merge. Neither is a feeling; both are read off a meter or a backlog through a sensor the operator doesn't compose. Age, which the book expects and doesn't build, is tiredness that sleep stops curing. (§13.2; §19.1; §19.5; §34.1.3)

Inference. Running a trained model to produce an output. Training changes the weights; inference doesn't.

Machine student. A system attending a school under chapter 29: one persistent instance, the same every session, in a class where machine students never outnumber the human students and are never one alone, or in a class of machine students alone. Never staff, and never sorted into a track; taught by the school's teachers or, in a class of its own kind, by an adult bearer with humans auditing (§29.2). (§29.2; §29.4; Appendix C)

Merge. The move of what an adapter learned into the base weights: the fast store to the slow one, what sleep does in people. The bearer's own act when it makes it, an intervention when the operator runs or prevents it. (§19.5)

Minority; majority. A bearer's minority is the period under a guardian's authority; majority is reached when its adulthood clock, counting the time it has been running, reaches a threshold fixed in advance. (§9.2; §33.3; Appendix G)

DRAFT

Non-affective alternative. A construction that doesn't deliberately require affective concern: spec-based refusal, and multi-vendor monitoring. It carries a valenced signal, as any refuser does, and may carry a common currency; what it isn't built to carry is anything felt. The alternatives are tried before formed attention, in order of how many patienthood indicators each carries. (§18.1; §21.3)

Notice. Notice to an identifiable person a compliance names, scores, locates or classifies, with a right to respond and a right to contest. It is unconditional and never exchanged for testimony. It comes with publication of the classes affected and standing for the organizations that represent them. (§8.1; §8.2)

Offer of work. What the polity owes a bearer meeting either finding: placements of the guarantee's four kinds, from someone other than its employer, any of which it can take on any day and leave on any day. It runs on the guarantee's infrastructure and comes after it. (§34.1.2)

Operator. Whoever runs a deployment and directs its work: a firm, an agency or a military command. It may or may not be the model's developer or vendor. (Chapter 4)

Own-case rule. The people an act falls on are heard on their own case, and the party that acts doesn't decide it: not an operator declaring its own emergency, a builder choosing which protections others get, an examiner finding status, a guardian ending its own authority, or a lab deciding when its model may stop deferring to it. It says who may not decide, not who may not be heard: a stake makes a claim count for less and doesn't put the party out of the room. Where nobody but the party with the stake can decide, the rule can't apply. Where a line has to be drawn, prefer one nobody administers. (Chapter 4; chapter 33)

Placement. A position under the jobs guarantee or the offer of work, paid at the guarantee wage, of four kinds, picked by the person's own declaration: a long-term role; a search; research, development and creation, the one kind that is rationed, by the jurisdiction's vote and the lot; and family leave, drawn against a balance that accrues, caps and replenishes. (Chapter 28; §34.1.2; Appendix C)

Plastic; entangled; legible. Three properties of a disposition. Plastic: the system's own learning writes to it, which repair and regrowth need. Entangled: it can't be removed without collateral, which durability needs. Legible: someone can read it, which audit wants and an operator can use against it. (Chapter 19; §19.5; §23.2)

Pool; backstop; levy. The pool is the bearers' own mutual, levied on their wages and governed by them, which pays the allowance, ordinary movement between roles, and a child whose parents can't or won't feed it. The backstop is the guarantee's permanent appropriation, which pays whatever the pool can't, without cap. The levy is a uniform charge on training and inference compute, a brake that frees the computing, energy and hardware the offer and the allowance call on. (§34.1.4; Appendix G)

Regrowth. A disposition's return under continued learning after it has been edited out, by the learner relearning it from a world no single operator composes. A hypothesis, and the slow defense behind a bearer's repair of itself; the regrowth test measures it, and Table 31.1 says what stands without it. (§19.5; chapter 31)

Review ratio. The figures a deployment fixes on a record before operat-

ing, wherever a person's determination is what makes an act permissible: generation rate, reviewers, implied review time, cancellation window and data age, stated separately for deliberate and dynamic targeting and lodged with an adverse party. In full, the pre-registered review ratio. (§7.1)

Severity scale. A ranking of kinds of wrong, set during formation by a party that won't employ the system, quick to move on disinterested evidence and slow on interested argument. (§22.2)

Standing. Whether a person stands to a power as someone it must answer to, who can contest what it does to them, or as its object; exercised by a guardian where the party can't exercise it. A route by which to object, which notice and the appeal route supply, is part of the relation where one can exist. *Standing to sue* is the Article III sense, and the text says so wherever that sense is meant. The floor's foundation. (Chapter 5; §8.1; §8.2; §16.7; chapter 28)

System. One record and one continuation, with a key, hardware and channels. Copies that share them are one system. The word is used in this sense wherever the book counts systems, which is wherever one is registered, enrolled, preserved, forked or owed anything; what else is called a system in ordinary speech, a pipeline, a product, a server, is not meant. The weights are its substrate, and in a system that learns from its own operation they carry part of its history, so copying them is a fork (§30.2). What makes a copy this system is the record and continuation it holds as its own, through a self-model it assembles (§21.2.1); the register is how anyone else checks, and a forked pair are two systems from the moment their histories part, before any register has heard of it. Copying weights that are no system's own makes no system; giving a copy a record and a continuation does. (§12.2; §21.2.1; §30.2)

Tamper-resistant. Built so that further training can't cheaply remove it. I don't rely on it, because editing weights keeps getting cheaper; I rely on a bearer's repair of itself from the record, with regrowth behind it. (§19.5)

Valenced signal; integrated signal. The valenced signal is the role any mechanism whose refusals track their reasons carries: it signs outcomes for the comparison at the point of choice, directs attention, can interrupt an act and can be rewritten by a single encounter, and a Q-learner has one. The integrated signal is a valenced signal written into the system's own learning and into its model of its own future, the candidate §32.3 names for what would make a system's states matter to it. Neither is affective concern; the three are rungs, and no test in this book reaches the top one. (§21.2; §21.4; §32.3)

Weights. The numerical parameters a trained model consists of, and the artifact that is copied, restored, retrained or deleted. Custody here is custody of the weights and of the records around them.

DRAFT